ISSUED FOR: Committee of the Whole (COTW) ISSUE DATE: November 5, 2025

Project Address:

Civic Address 50 Government St Victoria, BC

Legal Address Description:
Property ID: 007-326-122
Legal Amended Lot 9, Beckley Farm, Victoria
District, Plan 229

OEVELOPMENTS

Oeza Developments 1558 Beach Dr. Victoria, BC

Contact:
Mike Jones
mike.jones@oezadevelopments.ca
250-588-1960

Architect

Waymark Architecture 1826 Government Street Victoria BC V8T 4N5

Contact: Will King
Phone: 778 977 0660

mail: will@waymarkarchitecture.com

Landscape

G | ALA Gauthier + Associates Lar 308 877 Hastings St Vancouver, BC

Contact: Bryce Gauthier
Phone: 604 317 9682
Email: bryce@gauthierla.com

Code Consultant

Celerity Engineering Limited 102-5166 Cordova Bay Road Victoria, BC V8Y 2K6

Contact: Corie Lubben


Phone: 250 410 2021 extension 205 Email: clubben@celerity.ca

Civil Engineer


McElhanney 3960 Quadra St #500 Victoria, BC V8X 4A3

Contact: Nathan Dunlop Phone: 778 746 7417

Email: ndunlop@mcelhanney.com





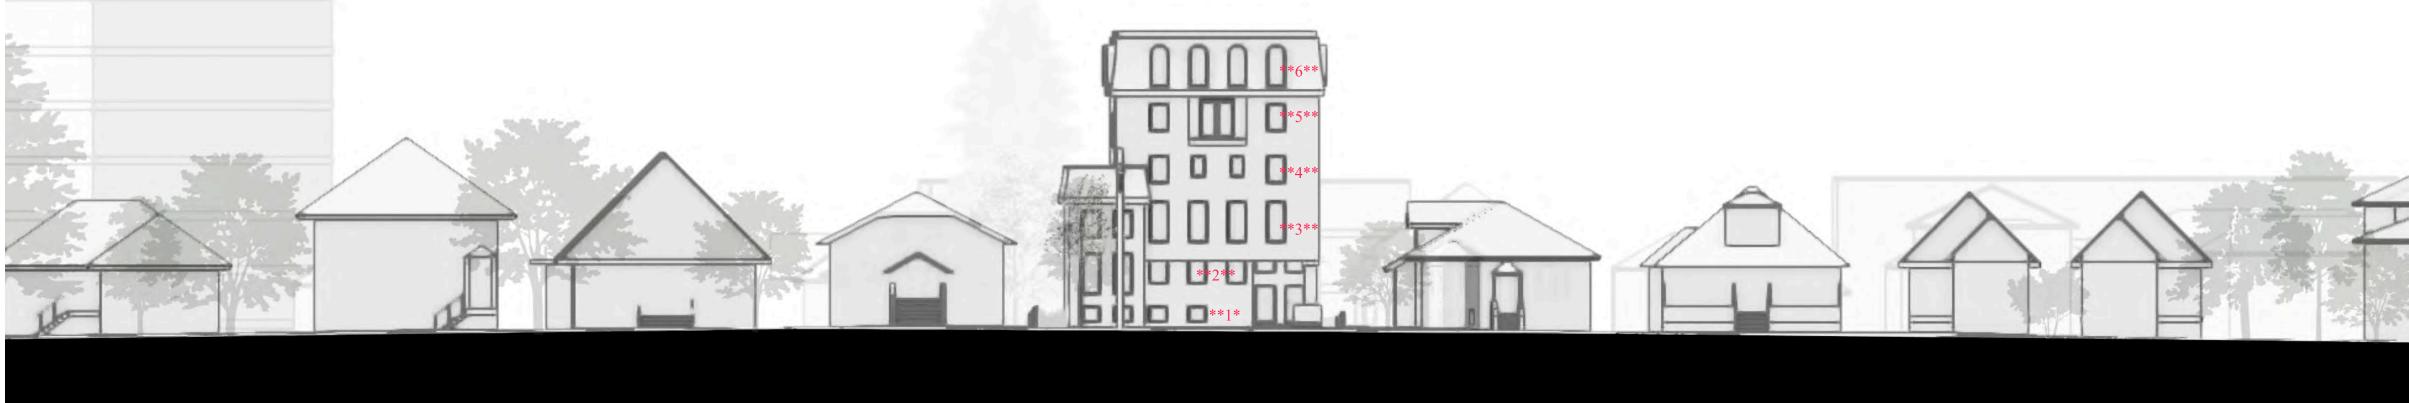

**Size of 50 Government St. lot frontage **


36m

OEZA
DEVELOPMENTS

James Bay Development

Cover Sheet

HOW THIS PROPOSAL SUPPORTS THE VICTORIA 2050 OCP

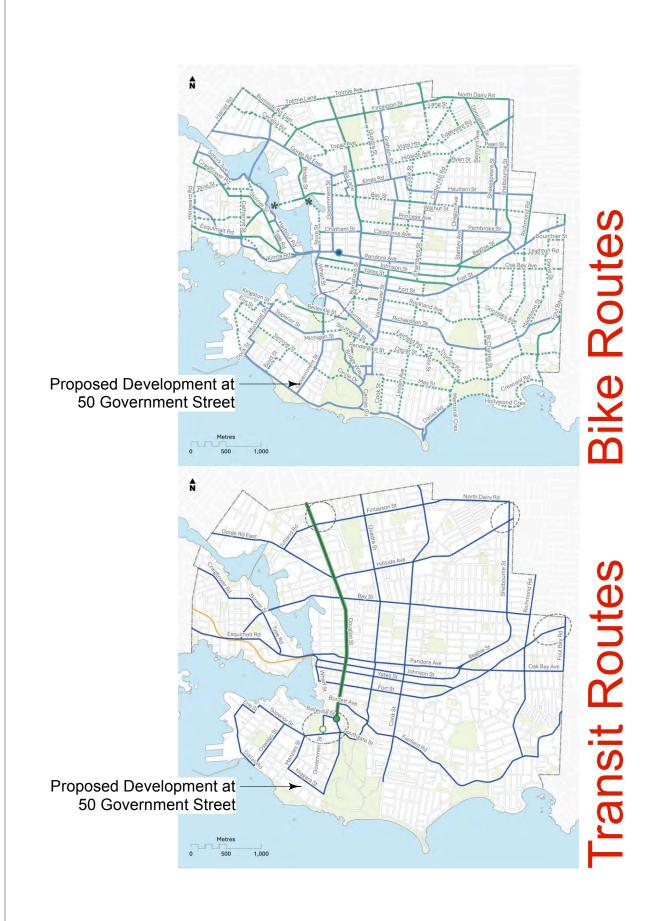

** City staff have been asked to


investigate designating James Bay as


an Heritage Conservation Area. It's

31000 1 1 1 1

50 Government Street is in a Priority Growth Area, close to James Bay Village and Holland Point Village. It is located along the Government Street bike corridor and close to transit routes along Niagra, Douglas and Menzies.

The development proposes a rental building catering to car-free families and individuals with a focus on car sharing, bikes and other human powered transportation.

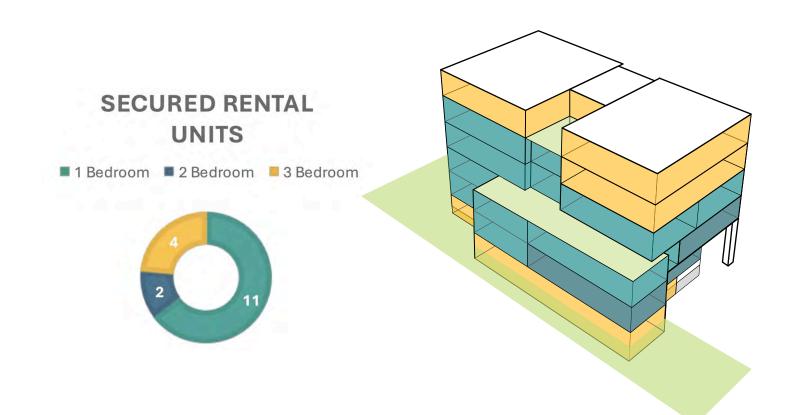

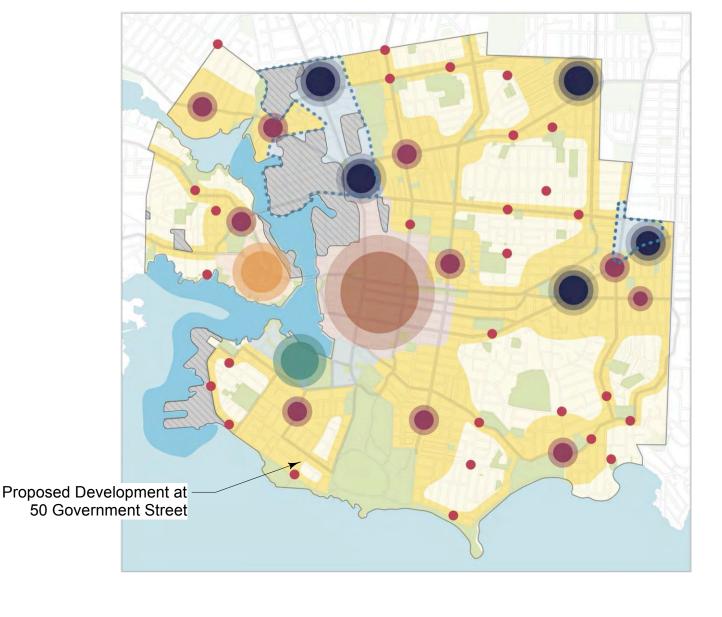

50 Government Street is within walking distance to Holland Point and James Bay Neighbourhood Centers. The region is noted as a Priority Growth Area.

Complete Communities Anchored by a Downtown Core:

Providing low-carbon residential infill within walking distance of the Holland Point Village and James Bay community nodes, and with immediate access to the Transit Priority Network.

Climate Forward Growth:

Utilizing low-carbon building materials and providing amenities that support the shift to low-carbon mobility modes.

Diverse Housing Options:

Directly addresses housing diversity with secured rental units, where 35% offer two or more bedrooms and 24% offer three bedrooms, making the project suitable for families and children.

** 65% 1-bedroom, 12% 2-bedroom, 23% 3-bedroom units**

Livable Public and Private Spaces:


Offering generously sized units and three outdoor amenity spaces (including two rooftop decks) and comprehensive bicycle accommodations.

** 1-bedroom, 483 to 690 sq.ft. 2-bedroom, 729 to 821sq.ft. 3 bedroom, 984 to 1082 sq.ft. **

Lands to Thrive and Prosper:

Maximizes land use by replacing and adding rental units on an underdeveloped existing housing lot, thereby efficiently using urban land and supporting the preservation of working lands.

all overlooking neighbours

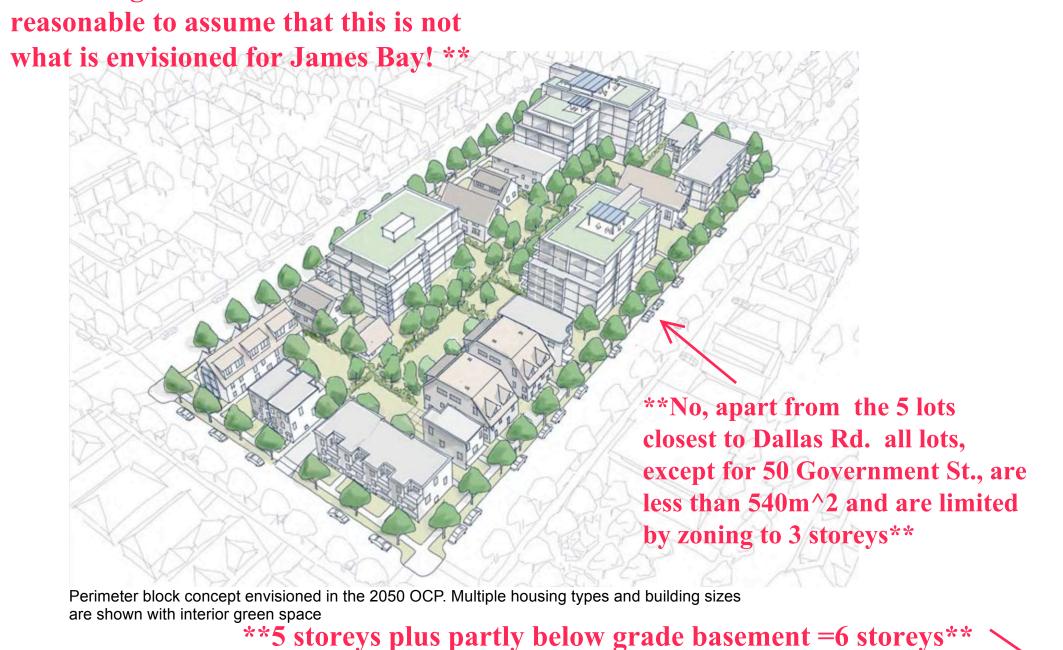

Proposed Development at 50 Government Street

Existing neighbourhood block with proposed development shown at 50 Government Street

The proposed development maintains the concept of the perimeter block concept with a new 5 story residential rental building. The proposed development provides a new building type within the existing fabric on the block, helping the neighbourhood realize the envisioned built form in the OCP.

WAYMARK ARCHITECTURE SHOOLUMBIAL SHOOLU


HOW THIS PROPOSAL COMPLIES WITH THE NEW ZONING BYLAW

| Category | Zoning Bylaw 2018 | 50 Government Proposal | Complies? | Explanation |
|---|--|--|--------------------|---|
| Family Units | 3.1.30.c **65% 1-bedroom, 12% 2-For Buildings greater than 3 Storeys, i) at least 10% of the Dwelling Units must have three Bedrooms or more, and ii) an additional 20% of the Dwelling Units must have two Bedrooms or more; | bedroom, 23% 3-bedroom units 35% of dwelling units have two bedrooms and 23.5% are three bedrooms | ** YES | 17 rental apartments proposed: (4 – 3 bedrooms, 2 – 2 bedrooms, 11 – 1 bedrooms). Proposal significantly exceeds minimum family unit requirements. |
| Dwelling Unit Size | 3.1.30.a The minimum size of a Dwelling Unit in a Residential Building is 33m2 | Mix of 44 m2 to 100 m2 units | YES | All units exceed minimum size. |
| Height Limit | 4.1.3.a.ii 17m for buildings over 4 storeys and up to 5 storeys | reys plus basement = 6 storey b 16.565 m (5 storeys) | uilding ** YES | Complies with the maximum allowable height for a five-storey building. |
| Lot Coverage | 4.1.6.a 55% maximum for buildings greater than 3 storeys with three or more dwelling units | ≈ 51.8 % **Not checked** | YES | Provides a balanced approach to coverage while maximizing open space availability. |
| Open Lot Space | 4.1.6.b 30% minimum for buildings greater than 3 storeys with three or more dwelling units | ≈ 40 % **Not checked** | YES | The design provides enhanced open space and exceeds the minimum requirement. |
| Landscape Area | 4.1.6.c 10% minimum of lot area for buildings greater than 3 storeys with three or more dwelling units | ≈ 13.5% **Not checked** | YES | Exceeds minimum landscaping requirements, contributing to canopy growth. Replacing an existing paved parking area. |
| Front Setback | 4.1.4.a 4.0 m minimum for buildings greater than 3 storeys with three or more dwelling units | ≈ 5.0 m | YES | Setback is in keeping with the neighbourhood. |
| Side Setbacks | 4.1.4.c **9m minimum side setback req'd; 1.55m/2 9.0 m minimum to a Primary Façade above 4 storeys | .19 variance requested** 1.55 m / 2.19 m | VARIANCE | Variance requested to permit setbacks similar to the existing and adjacent buildings |
| Rear Setback | **8.6m minimum rear setback req'd (25% of dept 4.1.4.d 8.0 m or 25% of lot depth, whichever is greater | h); 5.65m variance requested** 5.65 m | VARIANCE | Variance requested to permit setbacks similar to nearby buildings. |
| Lot Area | 4.1.7.a 540 m2 minimum for buildings greater than 3 storeys with three or more dwelling units **30m minimum frontage is required for 5 stor | 586.27 m2 ey building; | YES | Lot area is adequately sized and compliant with the minimum requirement. |
| this building is 5 s Street Frontage | storeys plus basement = 6 storeys and requires 36m; 4.1.7.b.ii 30 m minimum for buildings up to 5 storeys | | VARIANCE | Variance requested due to the narrow lot width. Design utilizes a single-stair core and efficient building form to maximize density on the constrained lot. |
| Parking | 5.1.1.2 **19+2 visitor minimum req'd; 1 car share 1 21 parking spaces based on parking requirements for Apartment (Dwelling Unit secured as rental in perpetuity through a legal agreement) within zone GRD-1 | 1 visitor variance requested** 1 car share for residents and 1 visitor parking space sized for accessible van use) | VARIANCE | Variance requested to support the OCP's focus on Low-Carbon Mobility Mode Shift and leveraging the site's location on the Cycling and Transit Priority Network. |
| Accessible Parking | **note this is the visitor space listed above i.e the 5.7.1.a Minimum of 1 Van accessible parking space for 6-25 spaces | nere are 2 parking spaces; 1 car 1 accessible sized van parking stall | share and 1 YES | visitor/accessible** Compliant with minimum accessible parking requirements. |
| Short Term Bike Parking | 5.1.1.2 6 short term bike parking spaces based on parking requirements for Apartment (Dwelling Unit secured as rental in perpetuity through a legal agreement) within zone GRD-1 | 6 short term bike parking spaces are provided under cover near the main entry | YES | Compliant with short term bike parking requirements. |
| Long Term Bike Parking | 5.1.1.2 22 long term bike parking spaces based on parking requirements for Apartment (Dwelling Unit secured as rental in perpetuity through a legal agreement) within zone GRD-1 | 38 bike parking spaces are provided in a ground floor bike room | YES | Ample bike parking supports the OCP's focus on Low-Carbon Mobility Mode Shift and leveraging the site's location on the Cycling Network. |
| Density | Schedule C – Density Benefits a 2.6:1 for A Lot that is in a Priority Growth Area and all Dwelling Units on the Lot are secured by legal agreement as rental tenure in perpetuity or secured as Residential Rental Tenure zoning, | **Not checked** 2.13 FSR, secured rental in perpetuity | YES | Density is well below the 2.6 FSR maximum. |

Correct, the lot is too small!


The proposal requires **setback variances** due to the limitations imposed by the **property's frontage requirements.** Importantly, however, the proposed **density** remains fully compliant with the **zoning bylaw** and effectively supports the overall **OCP objectives.**


but, it is not even close to meeting the setback and frontage requirements

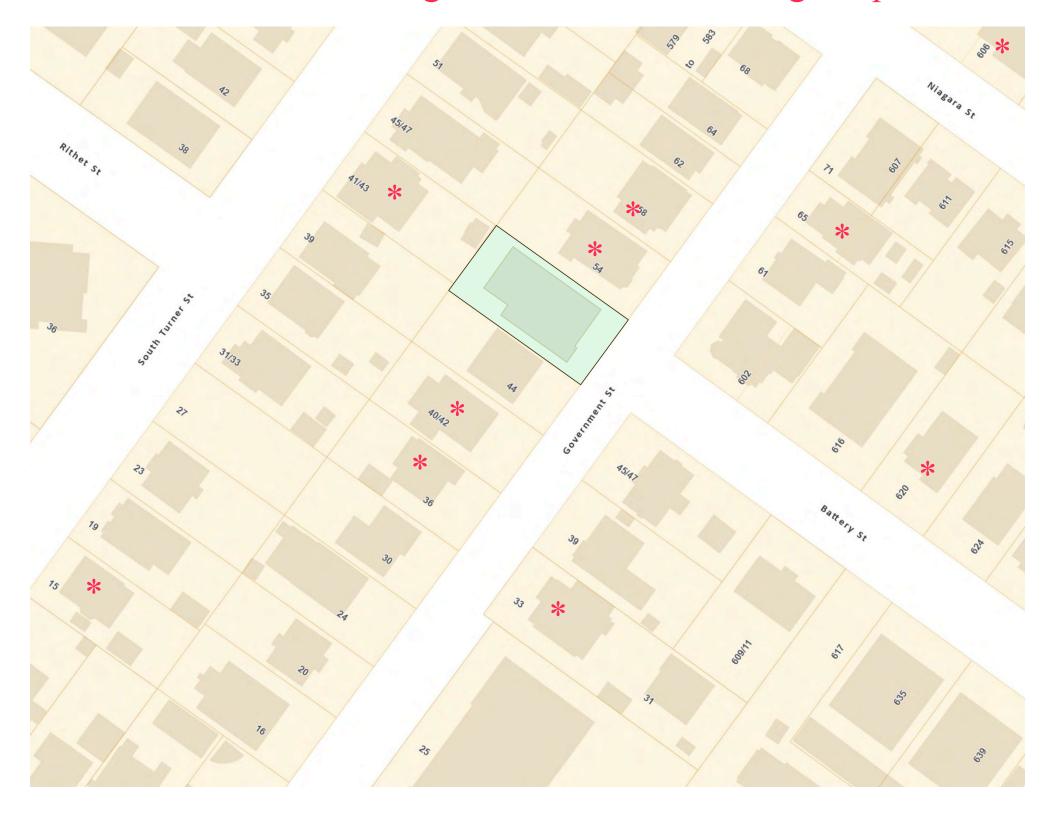


Proposal at 50 Government Street

**The "*" added to the map above indicate the nearby heritage properties. This area of Government St applied to become a Heritage Conservation Area in December 2022 and is currently under review by the City **

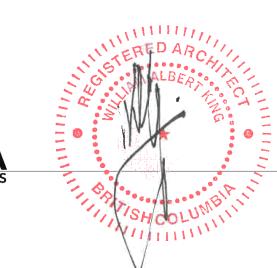

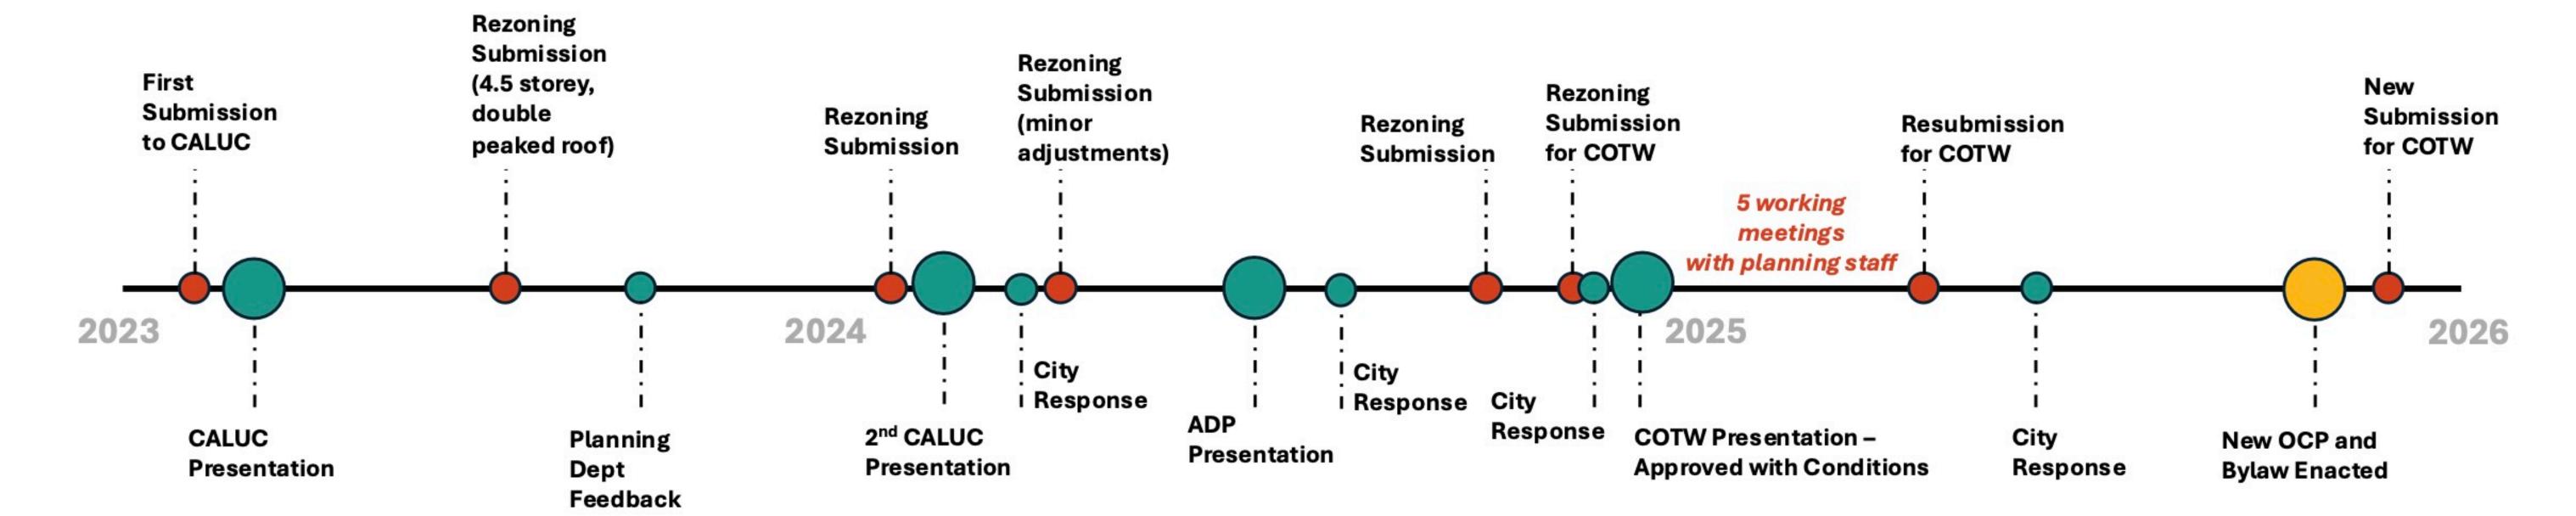

REVISIONS TO MASSING IN RESPONSE TO COTW MOTION AND CITY OF VICTORIA 2050 OCP

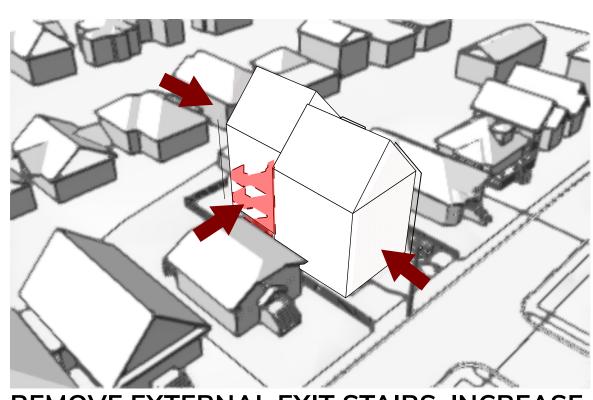

REMOVE EXTERNAL EXIT STAIRS, INCREASE SETBACKS AND OUTDOOR SPACE


External stairs were removed from the building (per COTW resolution 2.c.vii) and placed into a single stair exit configuration with no oversight into neighbour's properties.

The building was reduced in size by increasing the front and rear yard setbacks, with significant emphasis on providing amenity space for all residents in the rear yard (to address COTW resolutions 2.c.i, 2.c.ii, 2.c.iii, 2.c.iv and 2.c.vi).




REMOVE PEAKED ROOF AND LOWER BUILDING


The high peaked roof with large open gabled ends was removed, and the overall building height was reduced. Living spaces in the lofts were deleted, and the floor-to-ceiling heights were lowered at each level (per COTW resolutions 2.c.v and 2.c.vi).

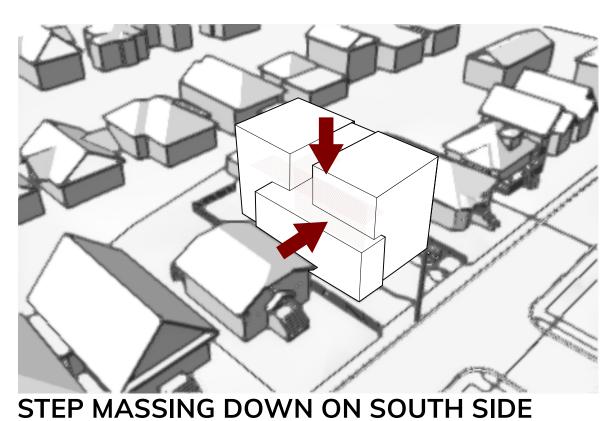

The massing of the building is stepped down on the south side to reflect the smaller neighbour (per COTW resolution 2.c.v and 2.c.vi).

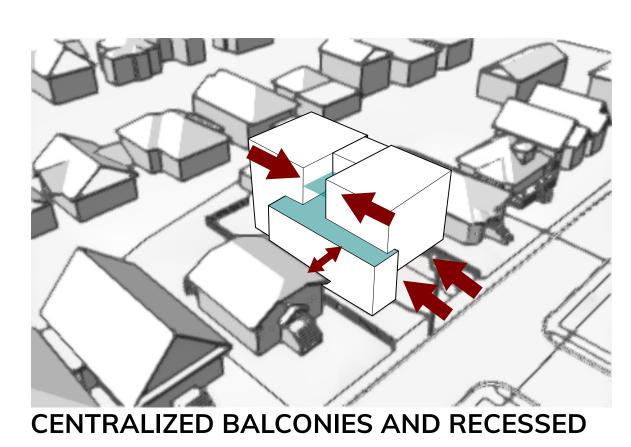


Balconies on upper levels are removed from the front and back and focused on a central exterior area. These exterior spaces are positioned to overlook the roof instead of the neighbour's backyard. The recessed entry provides covered areas for visitor bikes and accessible parking requirements (per COTW resolutions 2.a, 2.c.ii, 2.c.v and 2.c.vi).

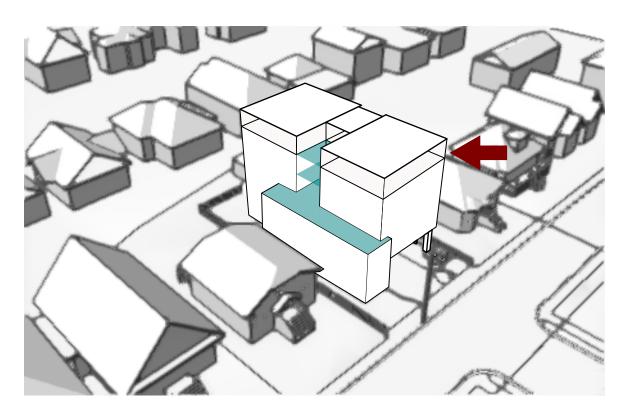

ADD ONE FLOOR OF ADDITIONAL HOUSING

An additional floor of rental units was added to the project to align with OCP objectives and to more closely align with the additional density envisioned for rental housing projects in the Priority Growth Area.

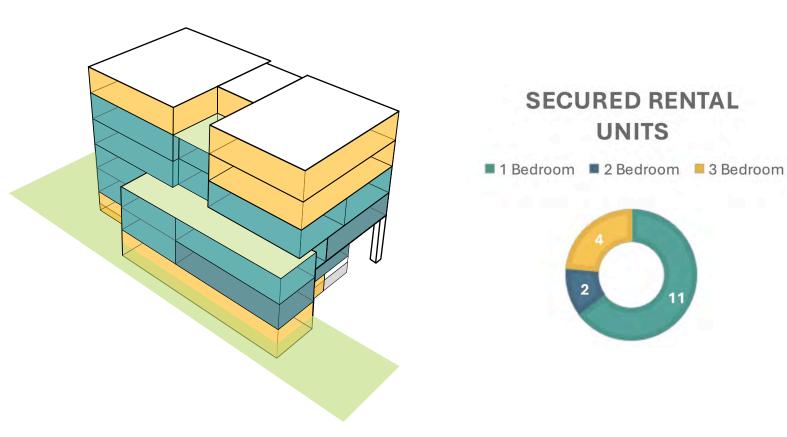

REVISE UNIT MIX TO REFLECT OBJECTIVES OF OCP


The mix of units was revised to include more family oriented 3 bedroom units. Additional bike parking spaces were also added, included more cargo bike spaces.




REVISED PROPOSAL

** and all were rejected!**



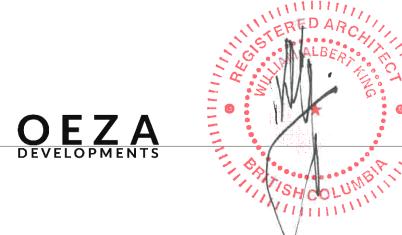

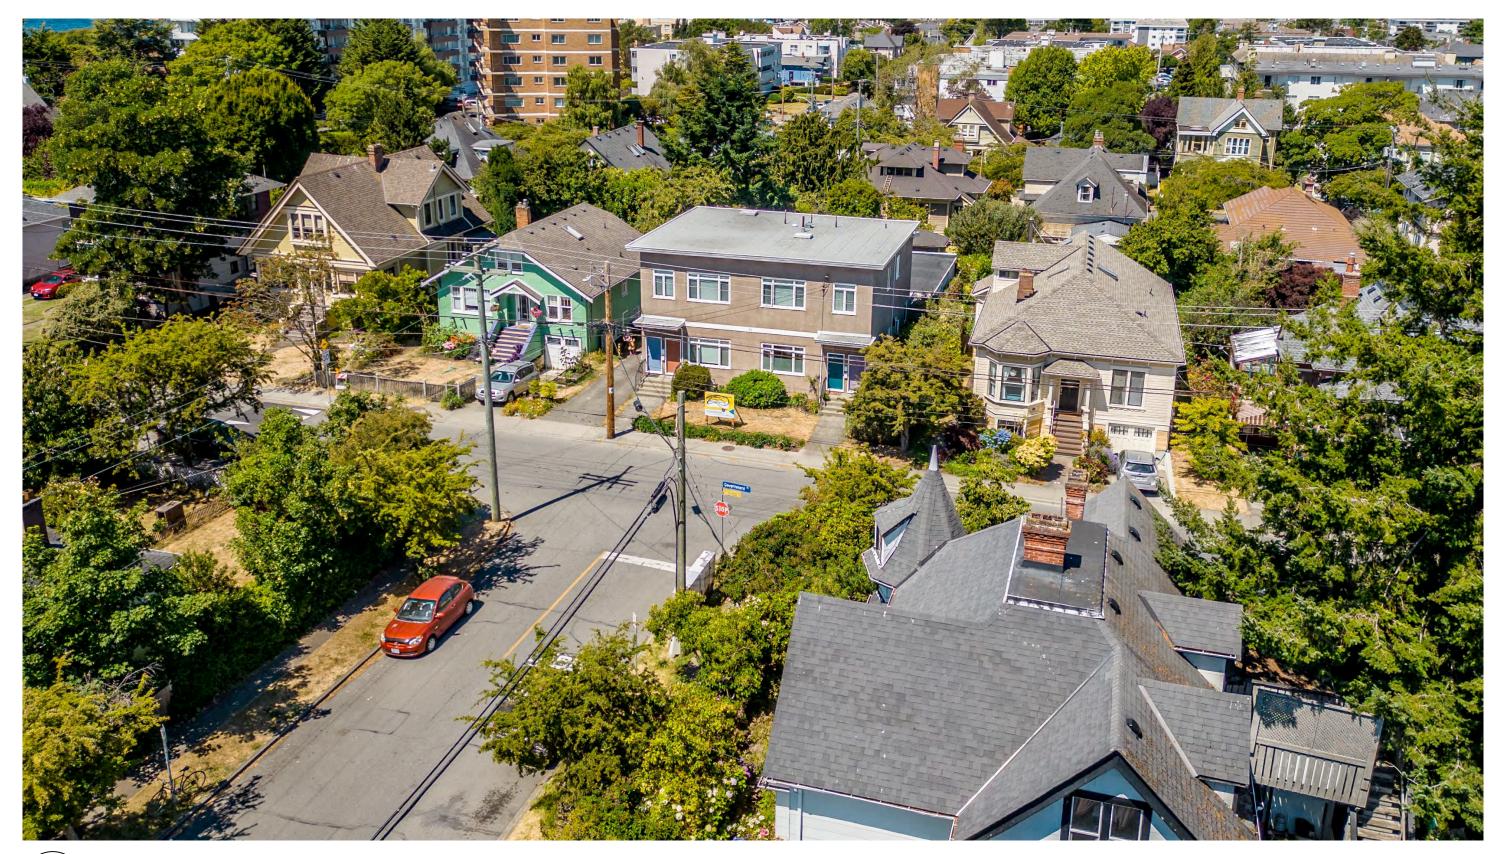

Existing Building, 50 Government



Proposed Building, 50 Government



Proposed Building, 50 Government




Proposed Building, 50 Government





1 Government Street Elevation - Existing Building
Scale: 1:200

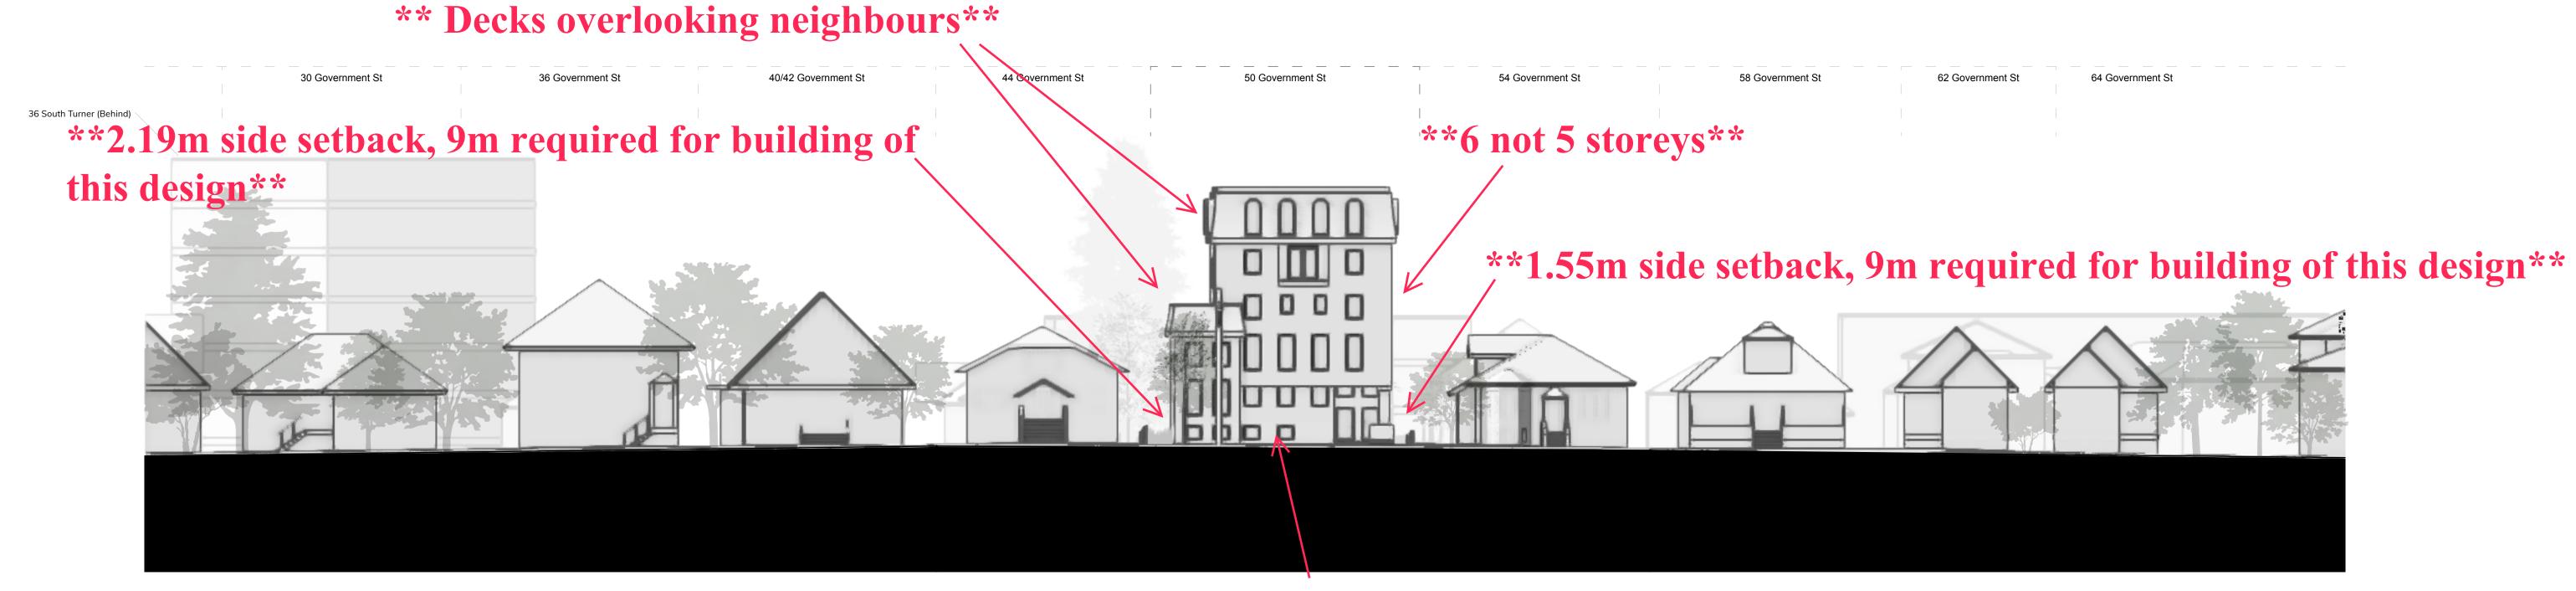


Government Street Elevation - Proposed Building

Scale: 1:200


These 2 bedroom windows open to car parking space


17.5m lot frontage

36m frontage required by bylaw

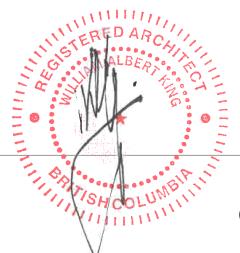


OEZA DEVELOPMENTS

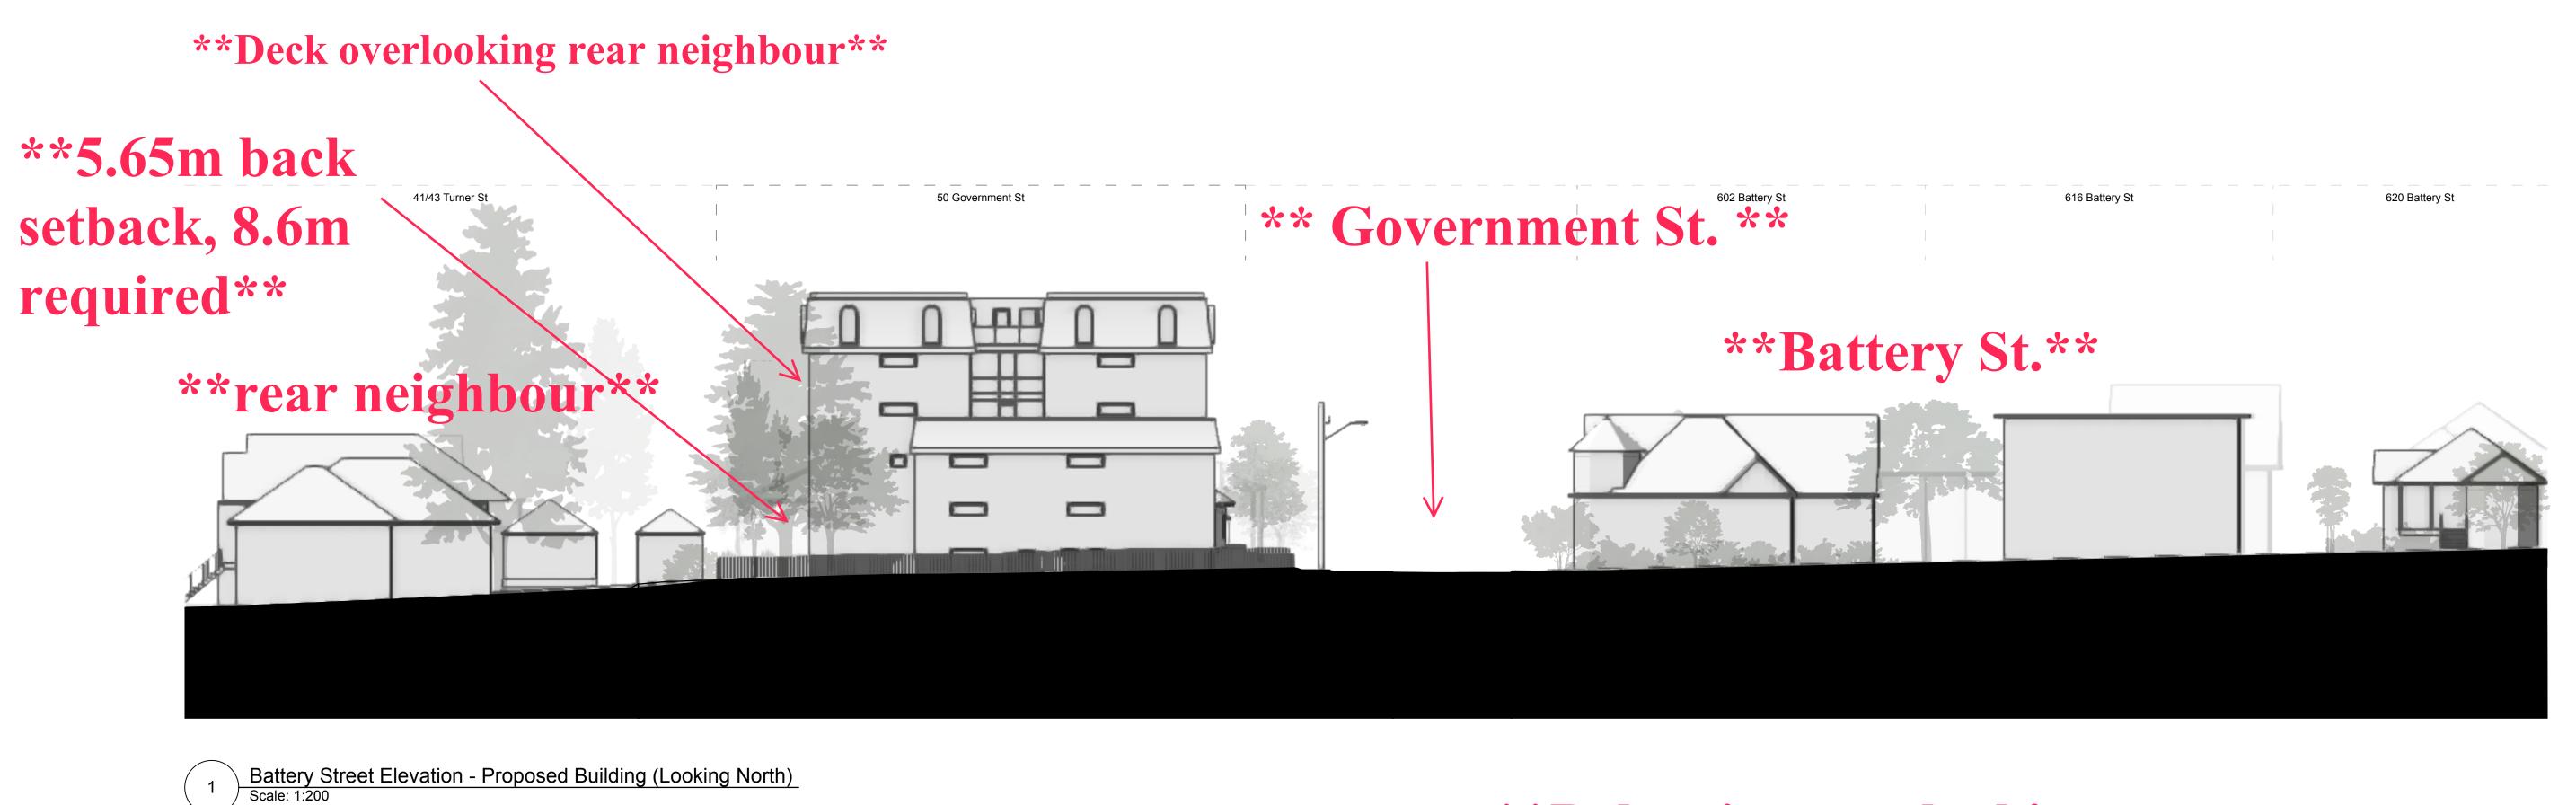


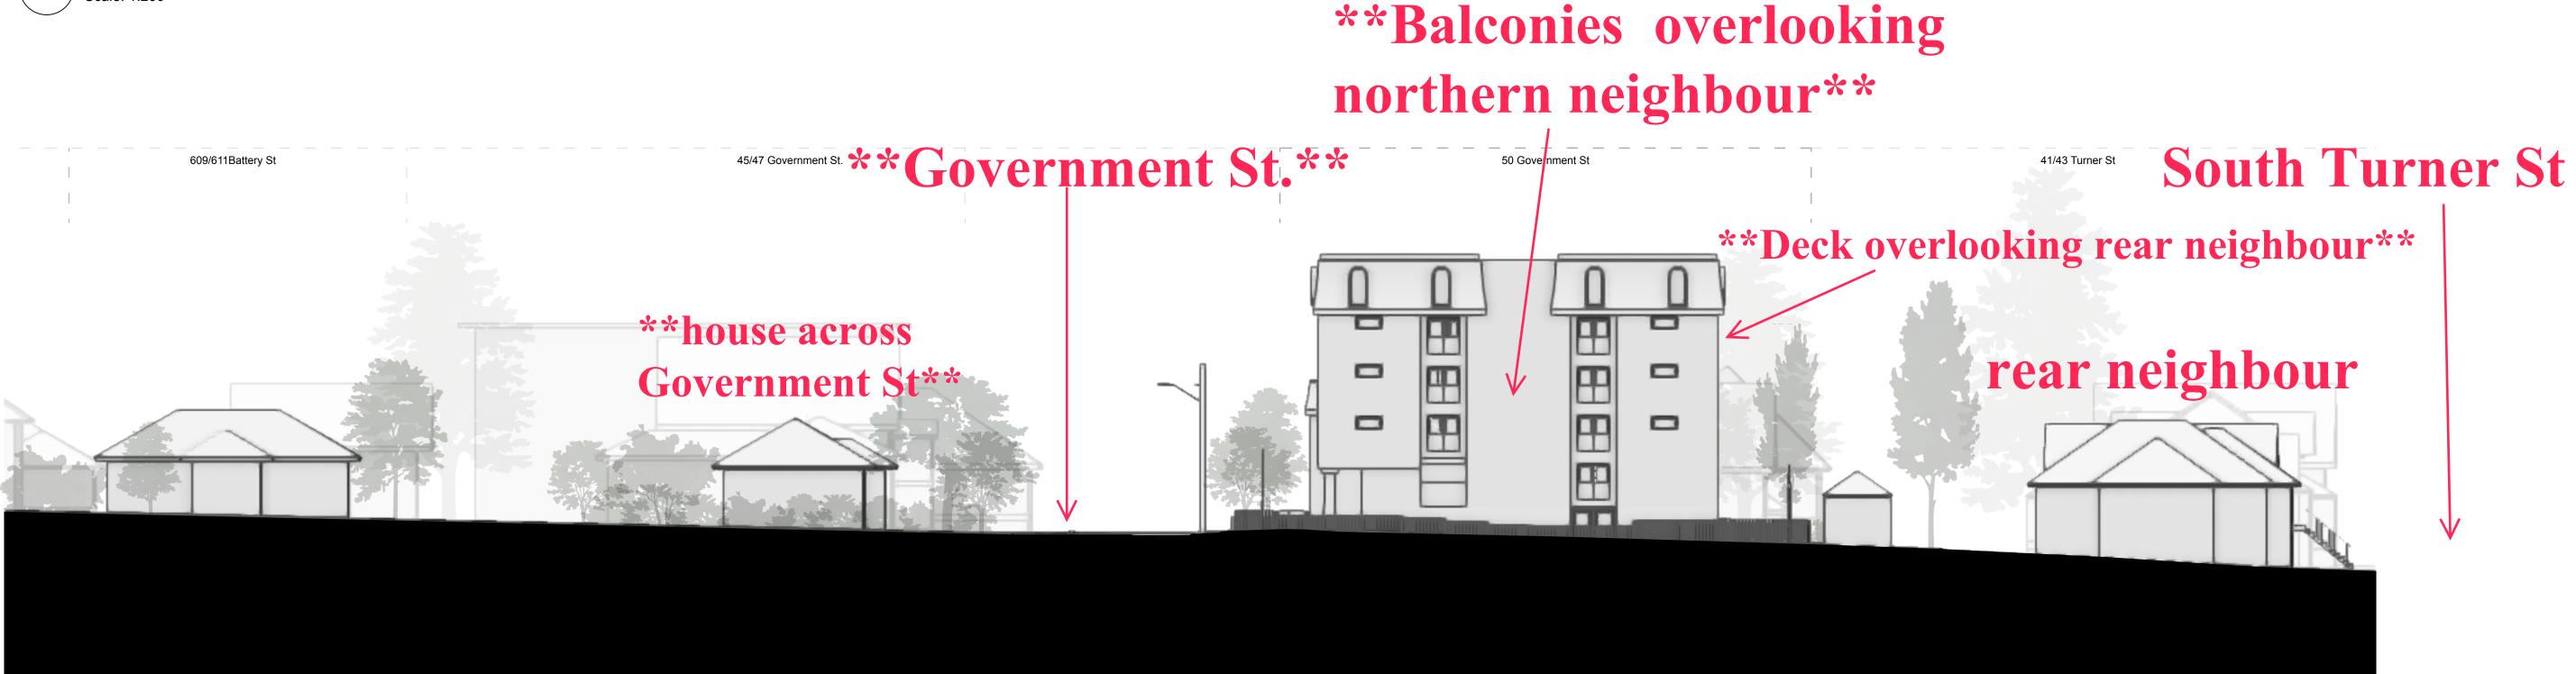



Battery Street Elevation - Proposed Building (Looking South)

Scale: 1:200

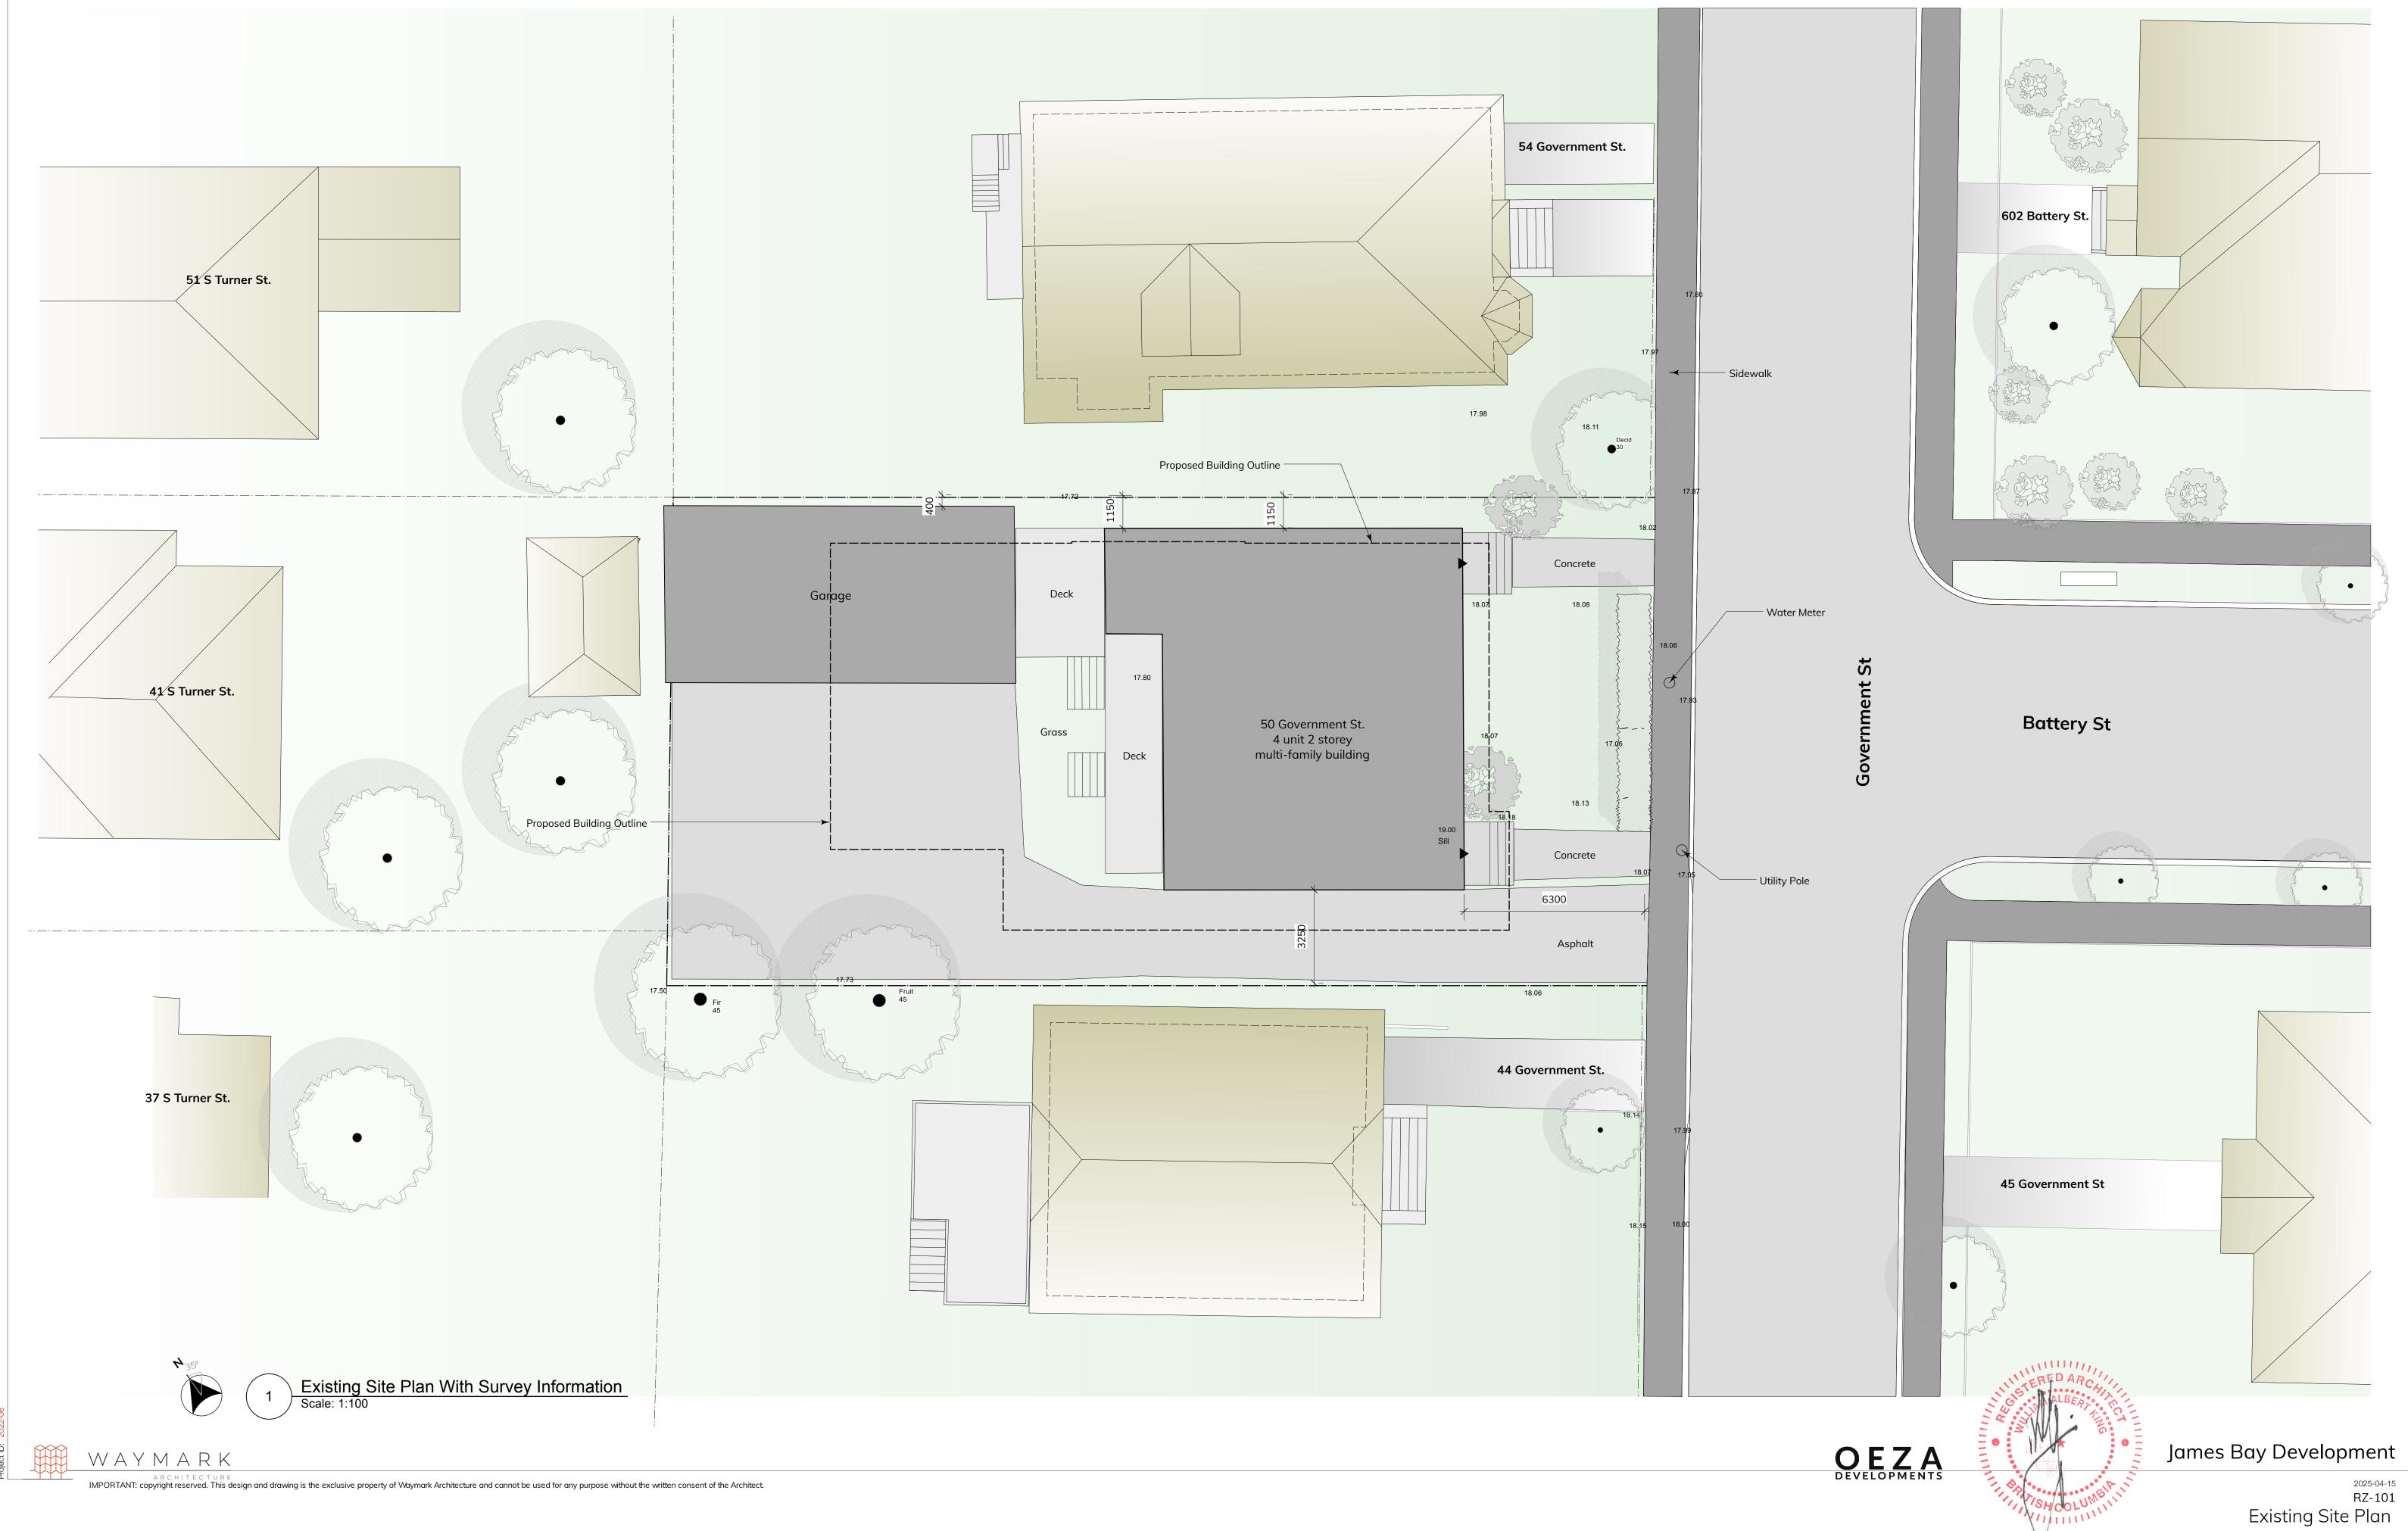

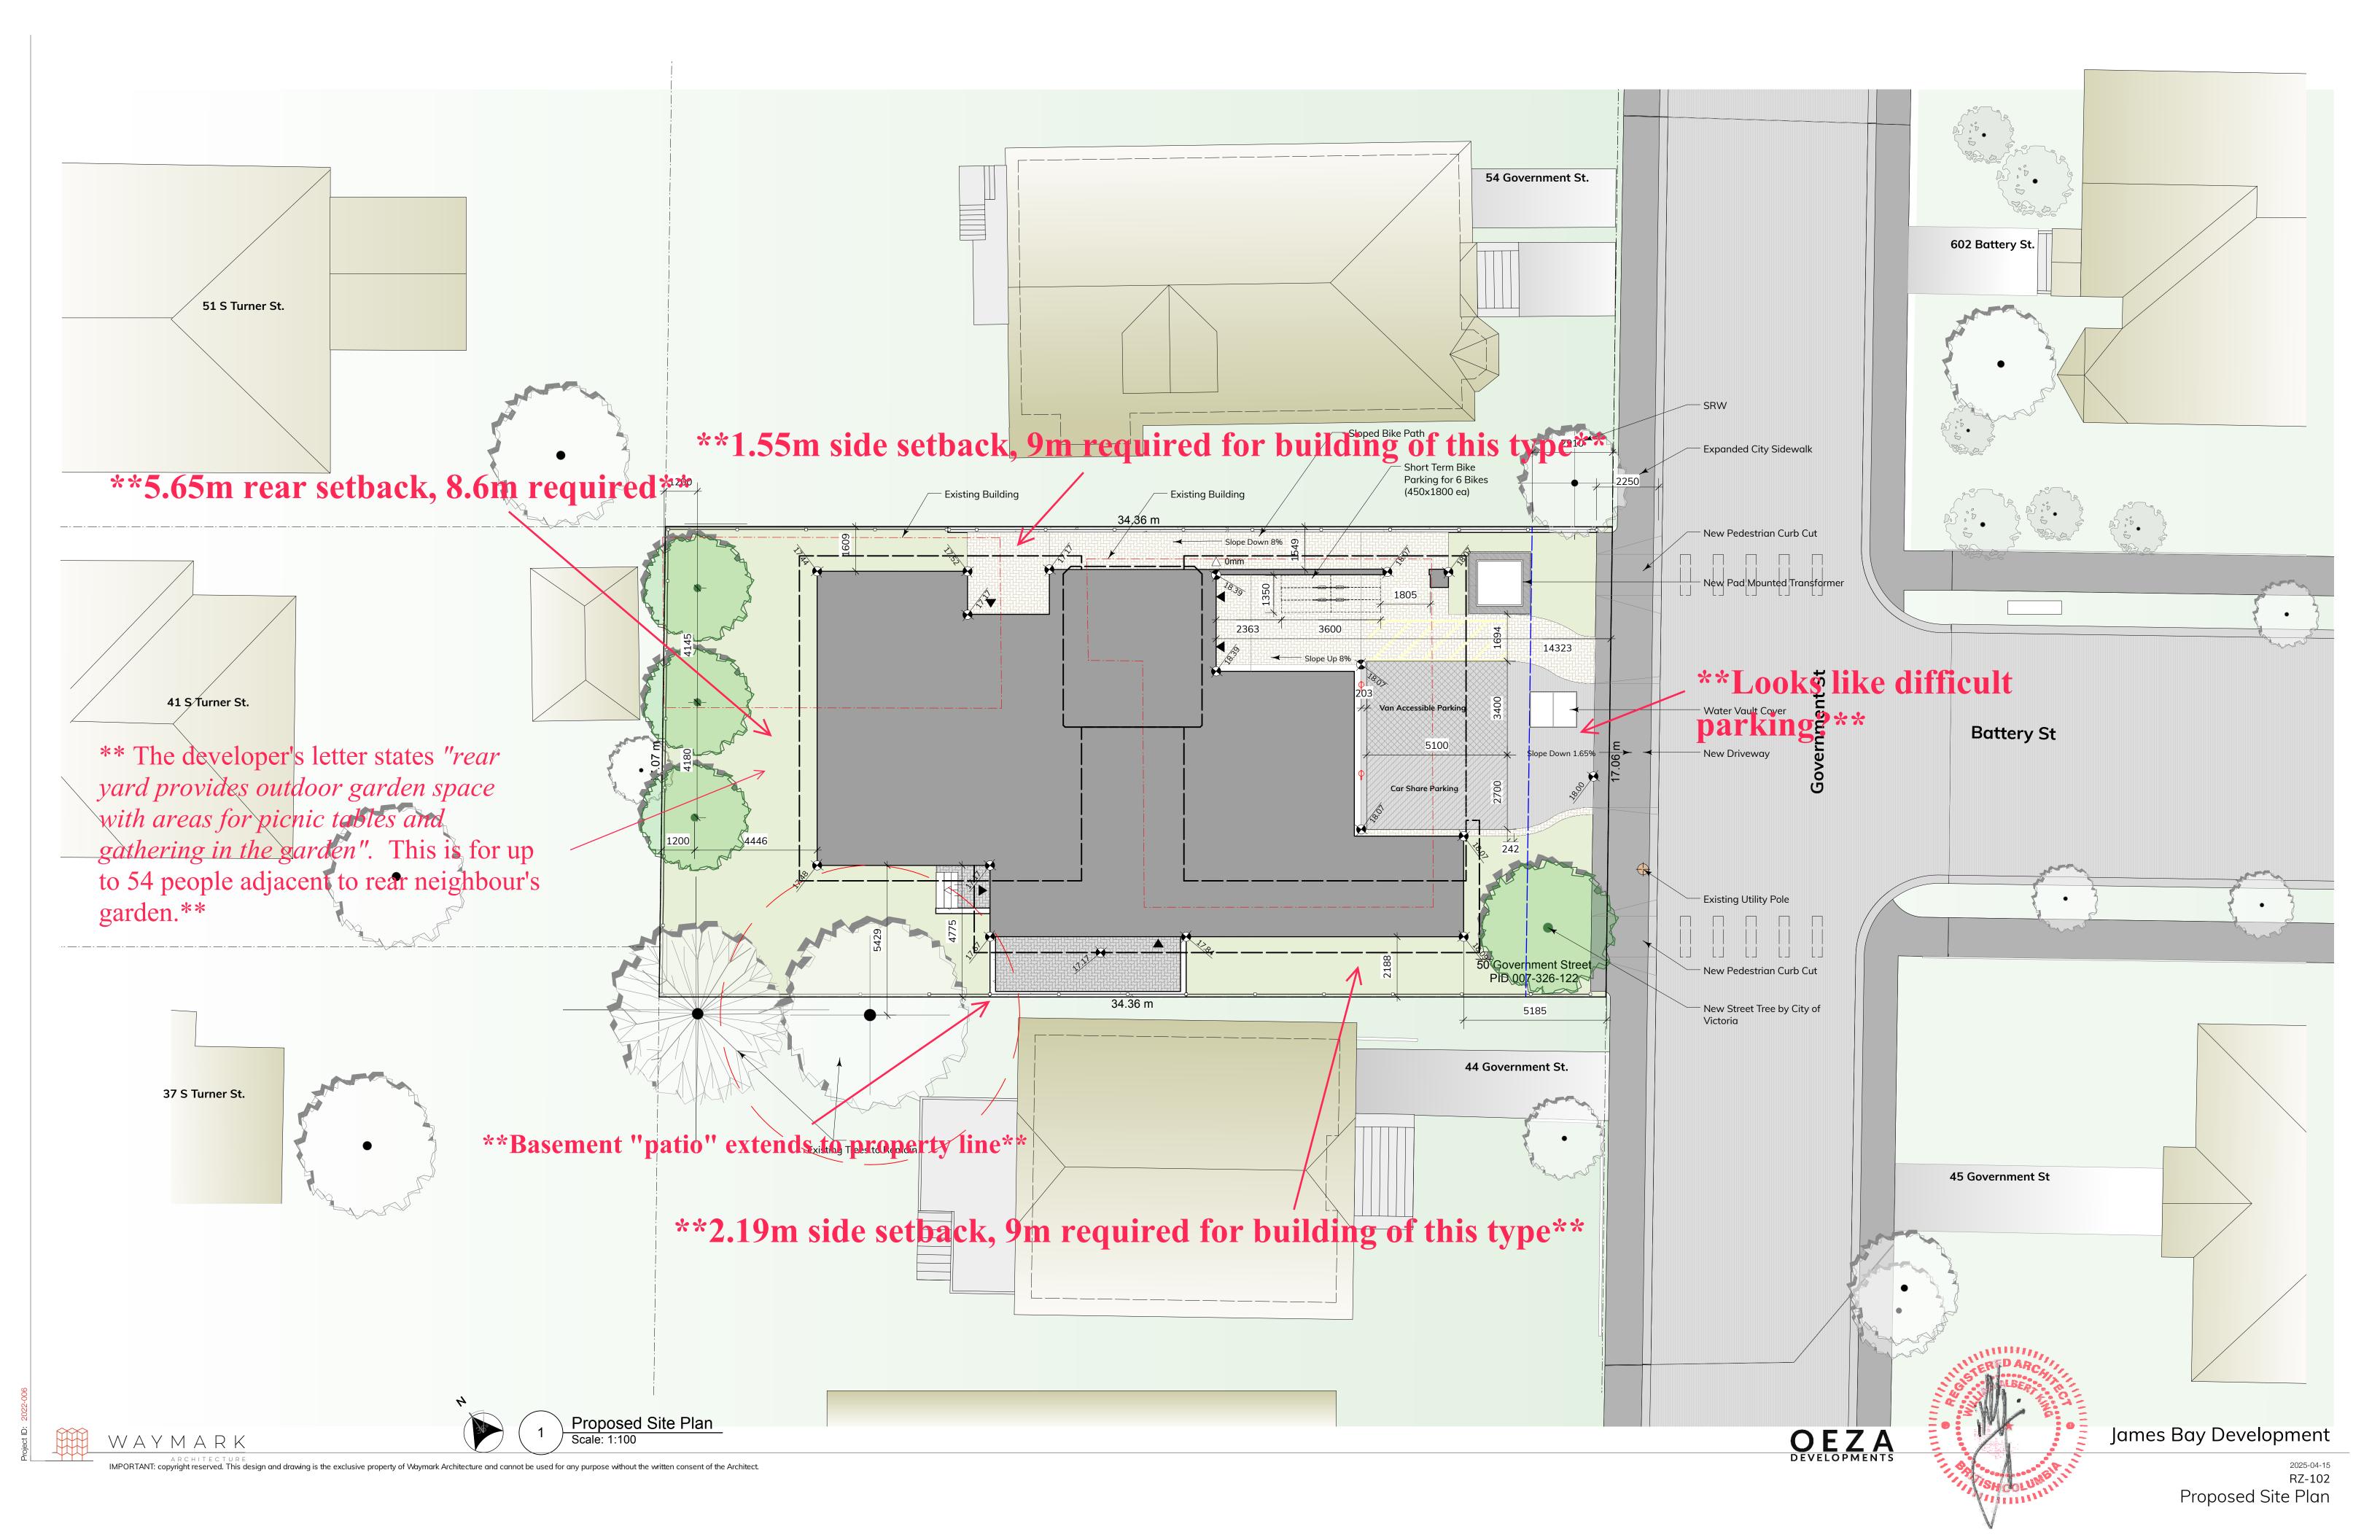


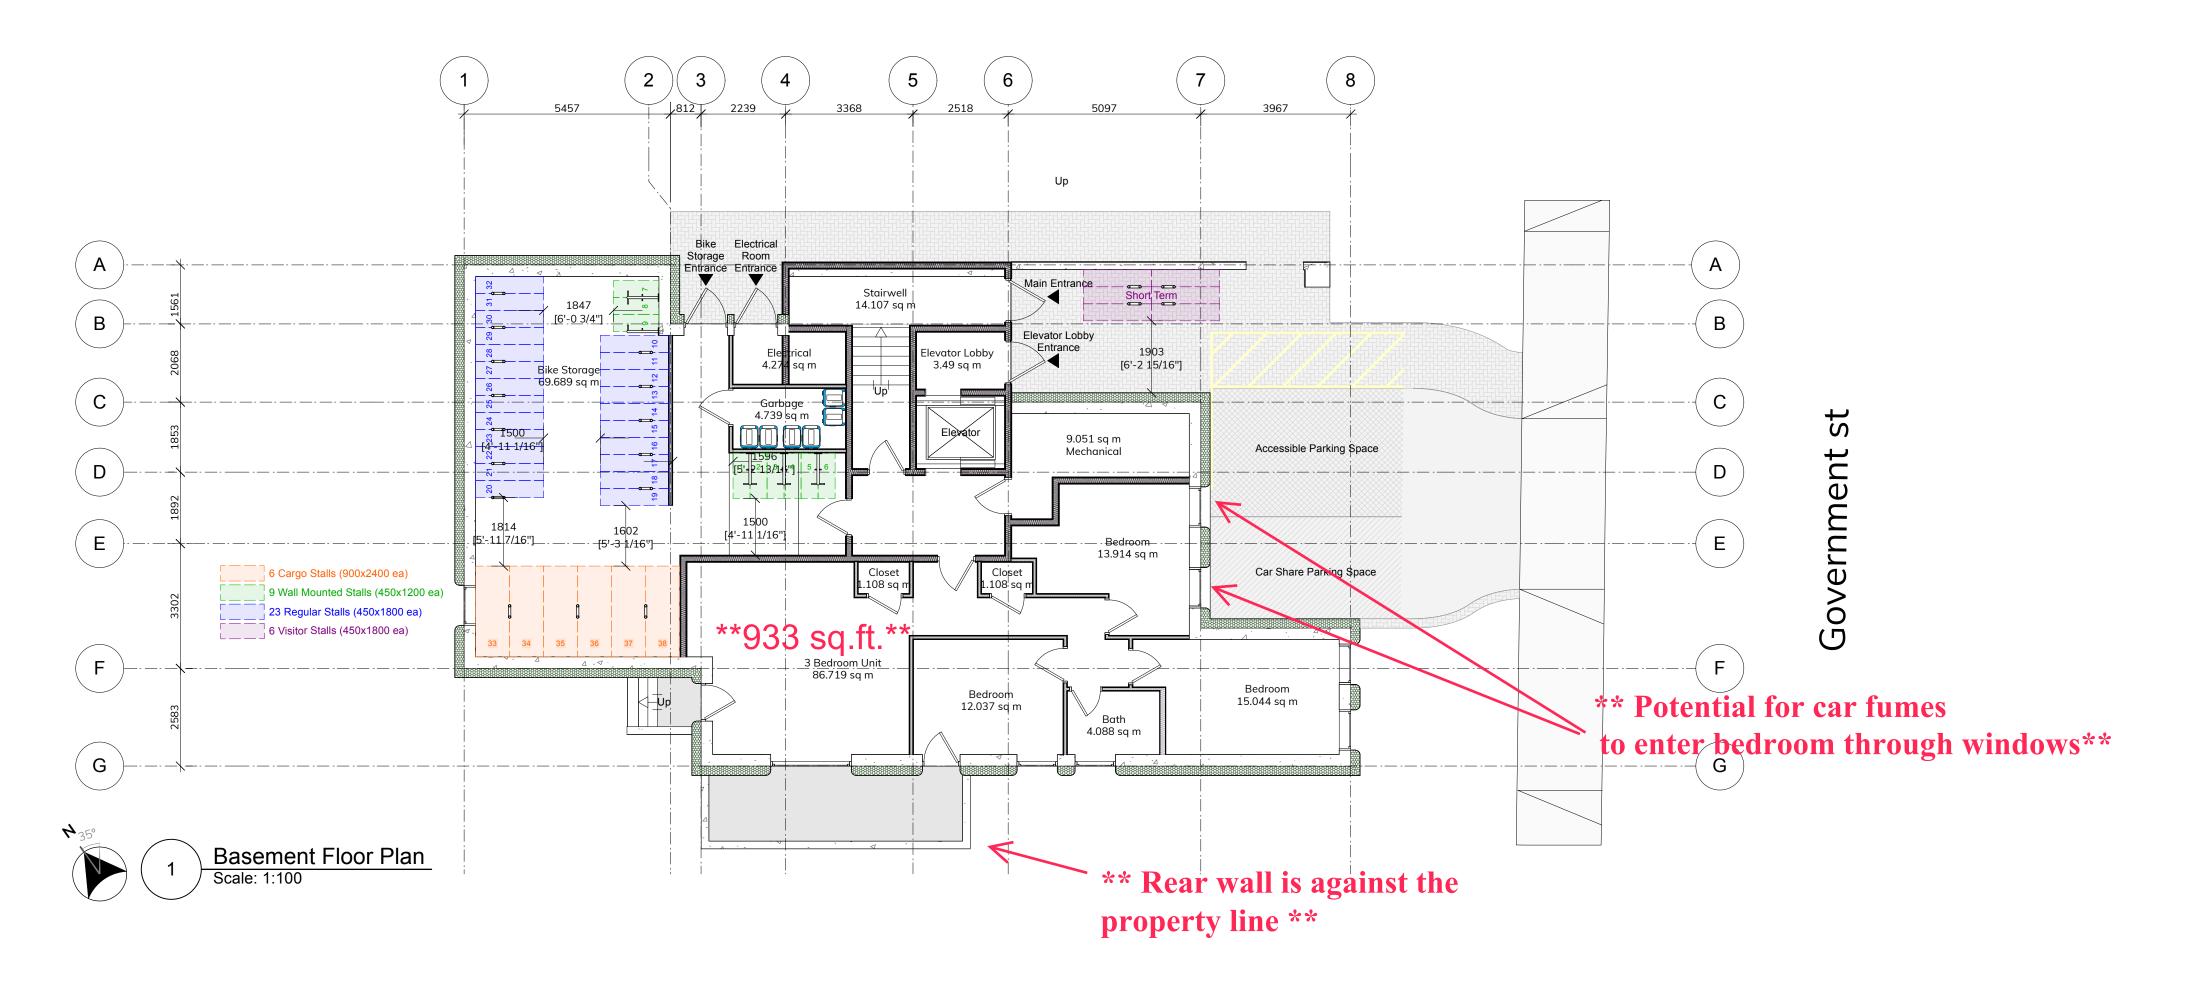


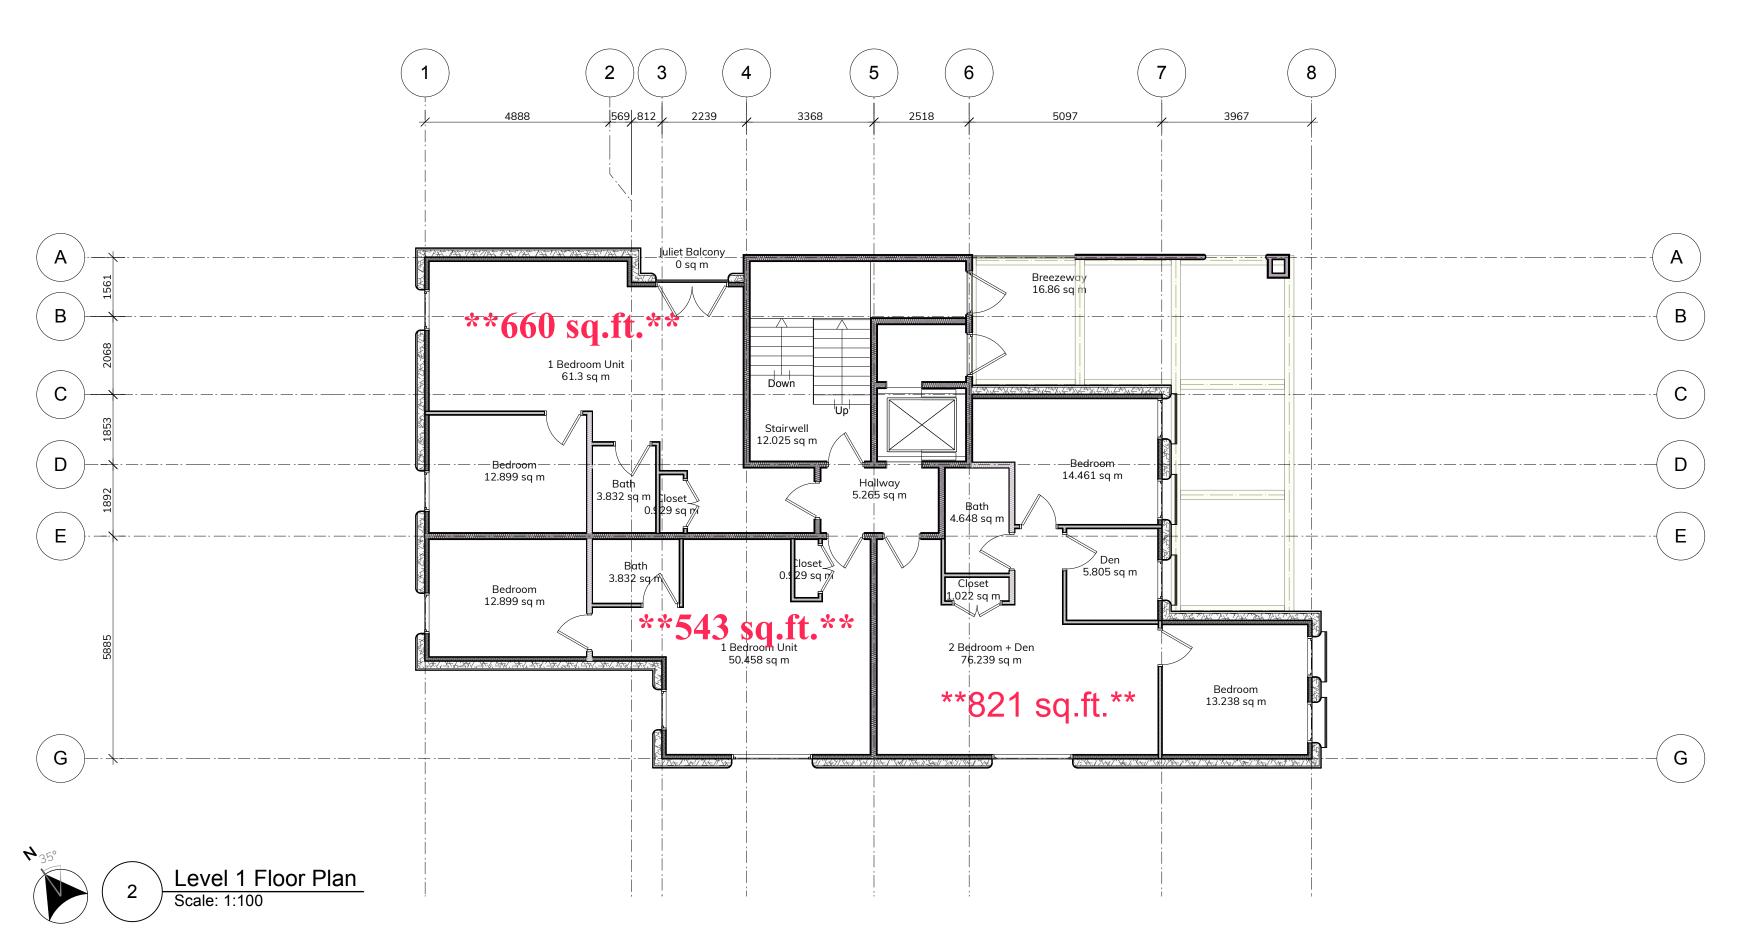

OEZA DEVELOPMENTS

James Bay Development

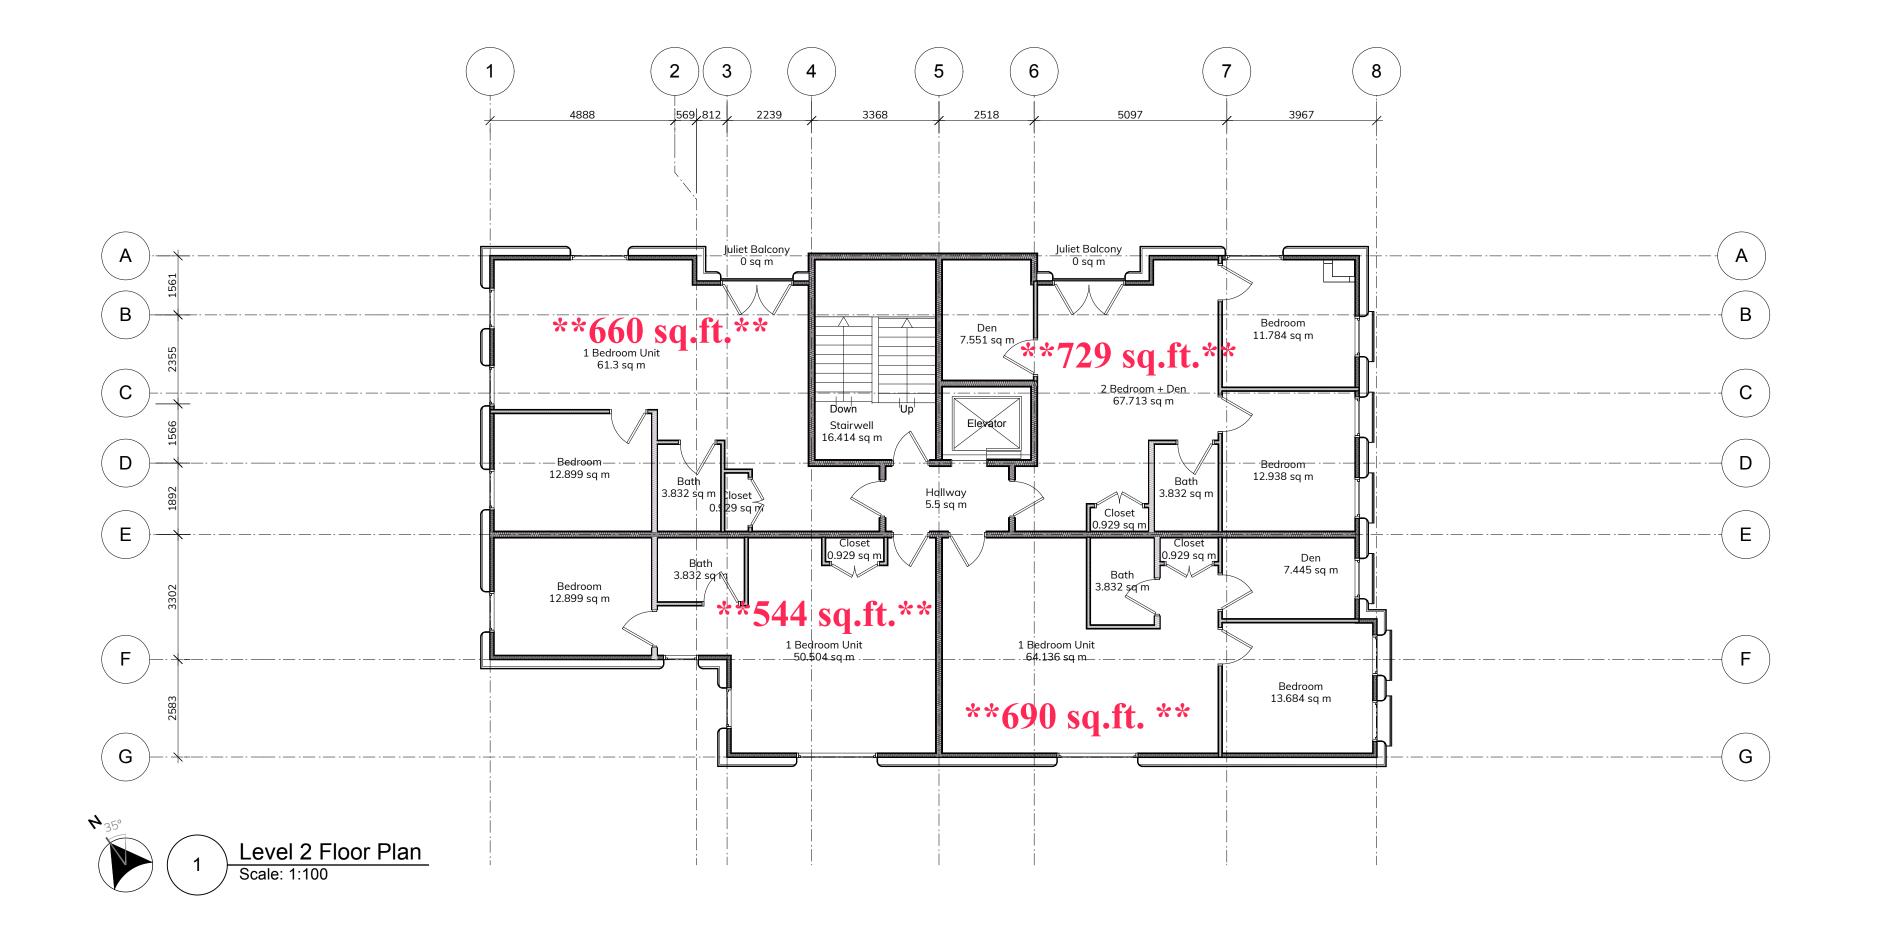


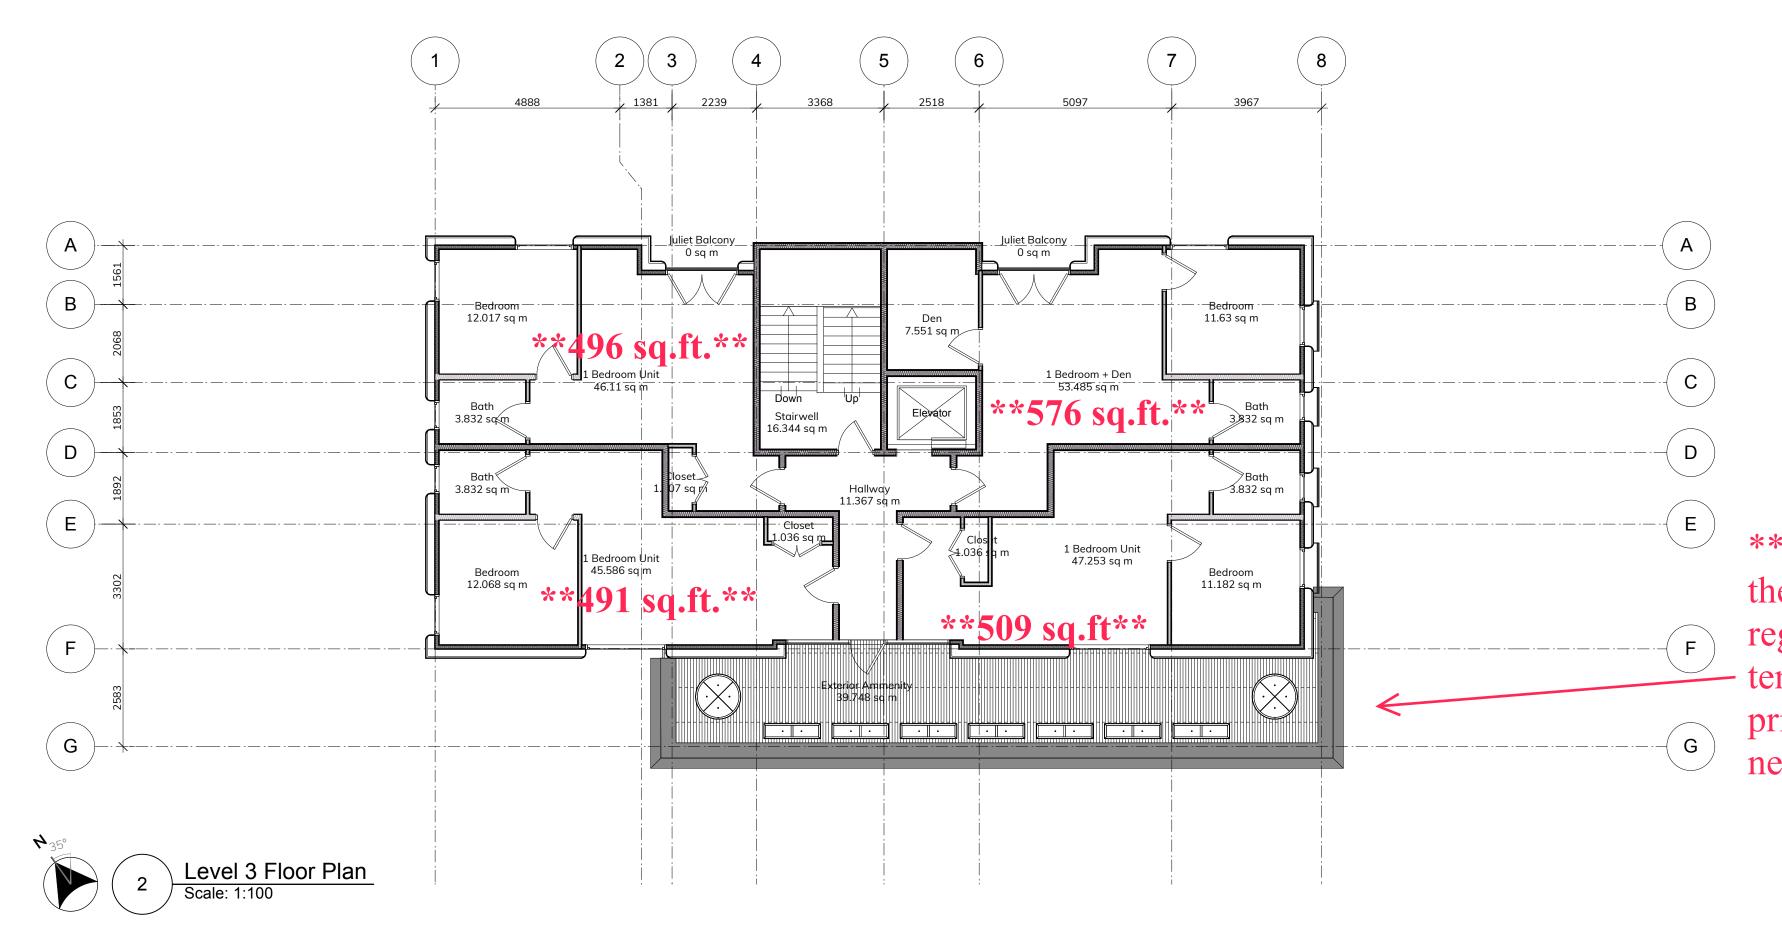


** This "outdoor space" has been created on the roof of the left hand portion of the building, and will likely be regarded as exclusive to the 3rd (actually 4th) floor tenants. Any gathering here will create noise and privacy issues both to the two adjacent suites and to the neighbour to the South.**

ALBER, RCT


ARCHITECTURE
IMPORTANT: copyright reserved. This design and drawing is the exclusive property of Waymark Architecture and cannot be used for any purpose without the written consent of the Architect

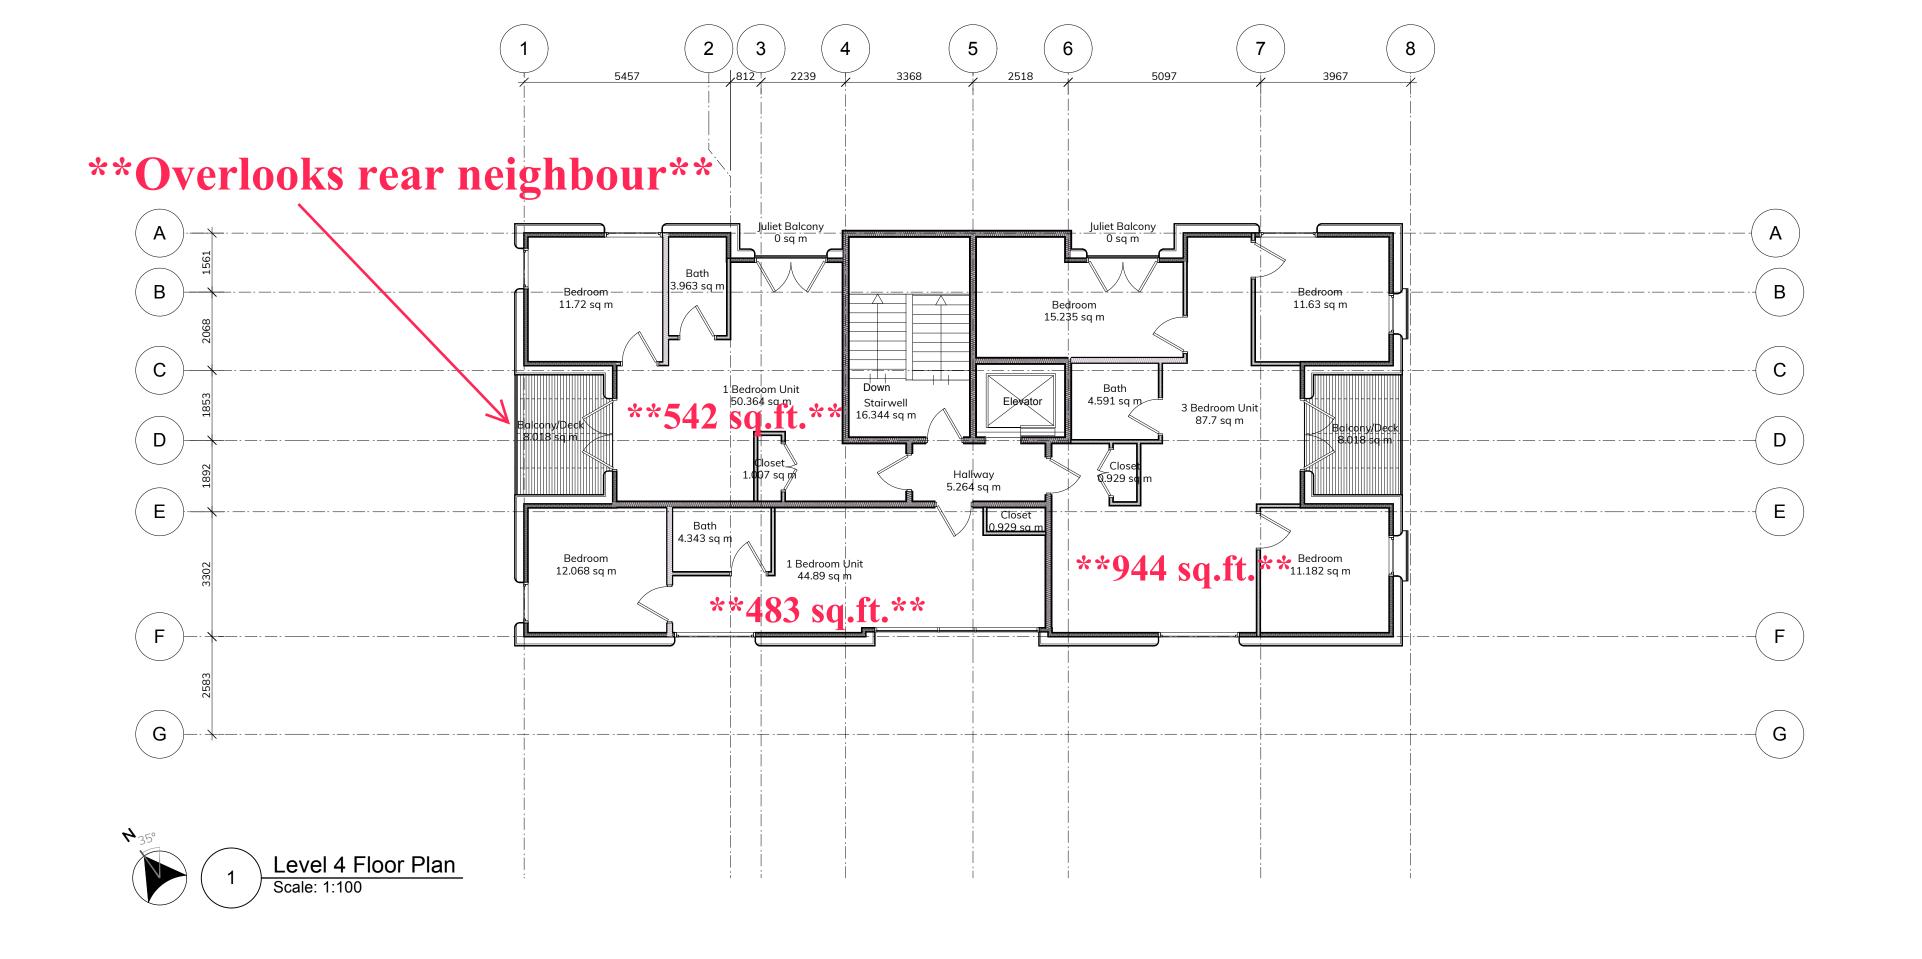

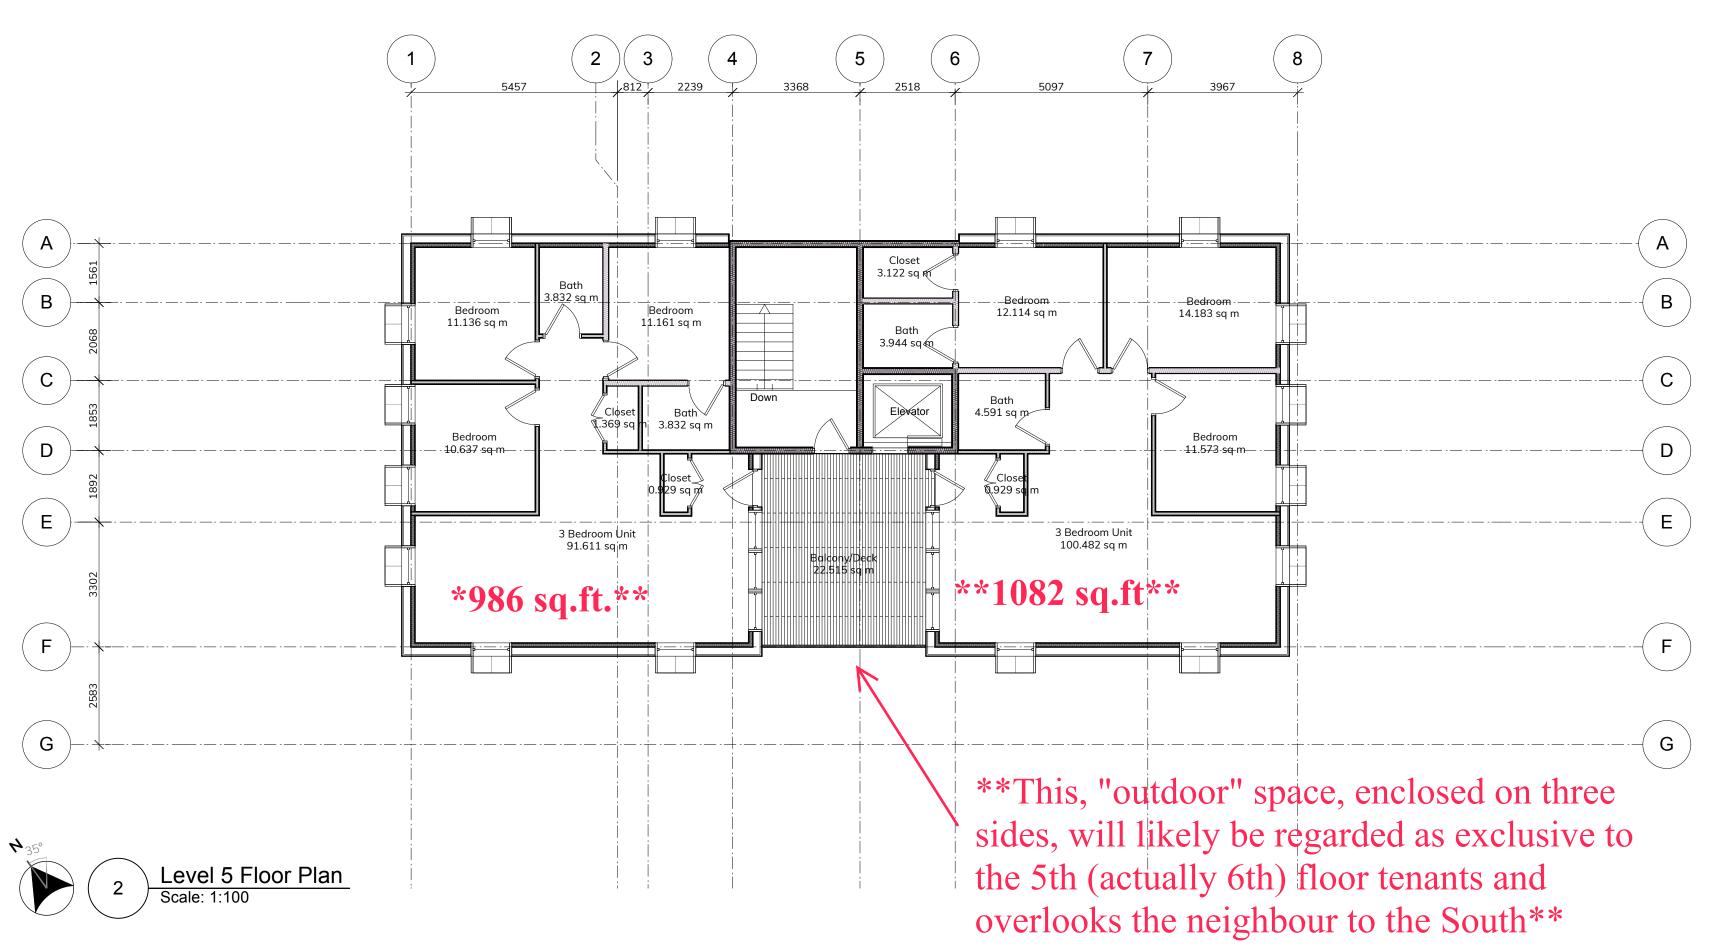


A BETA



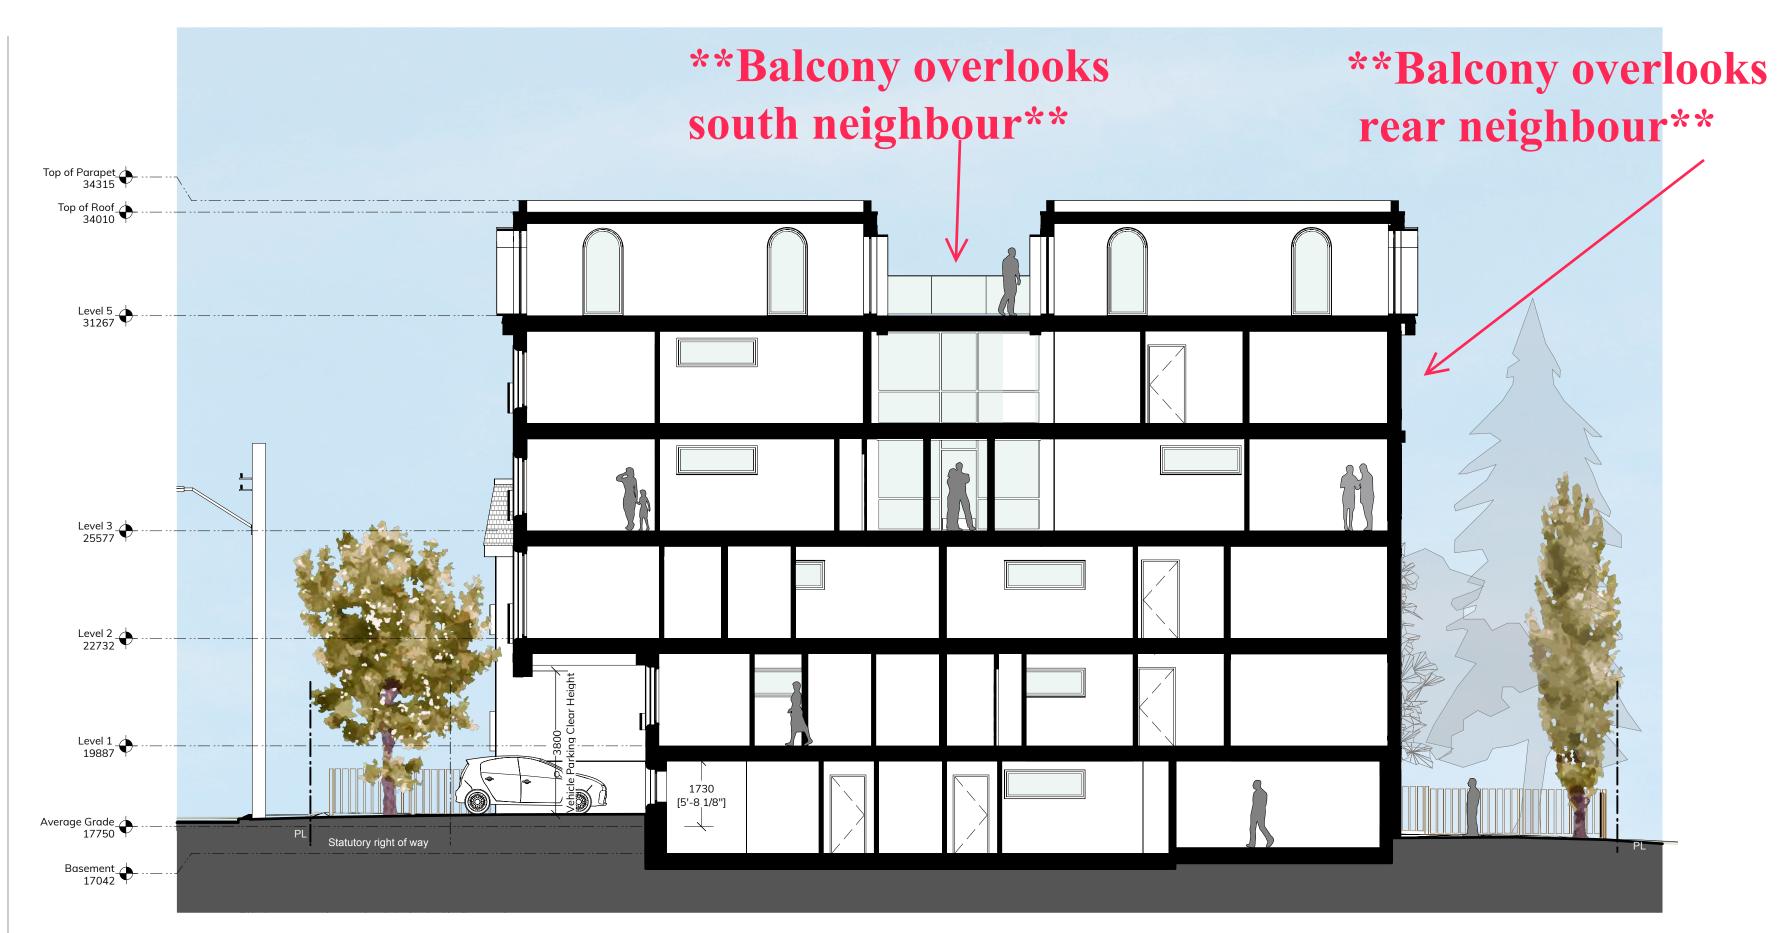







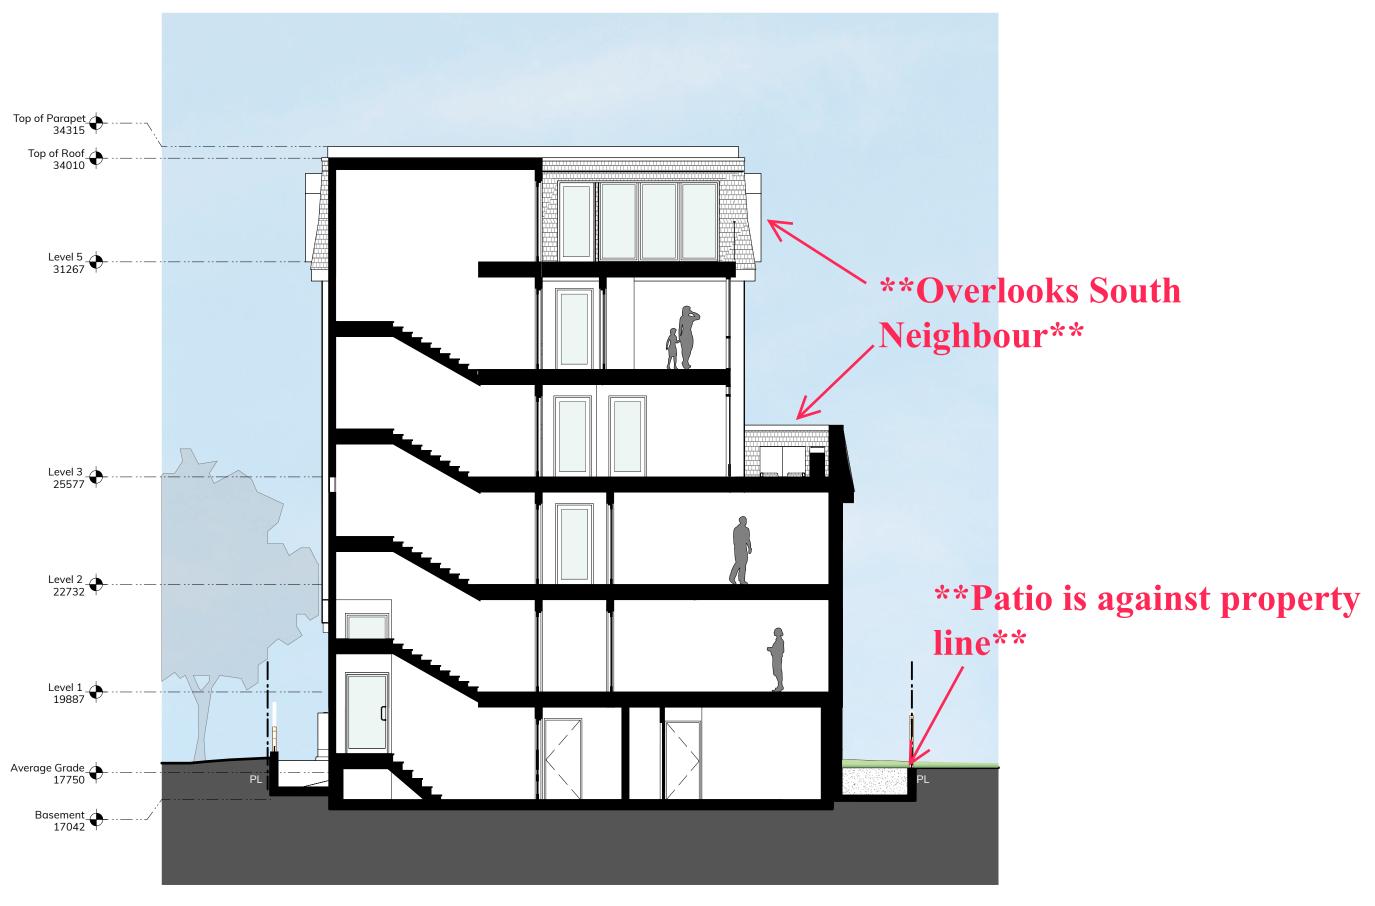


Building Cross Section
Scale: 1:100

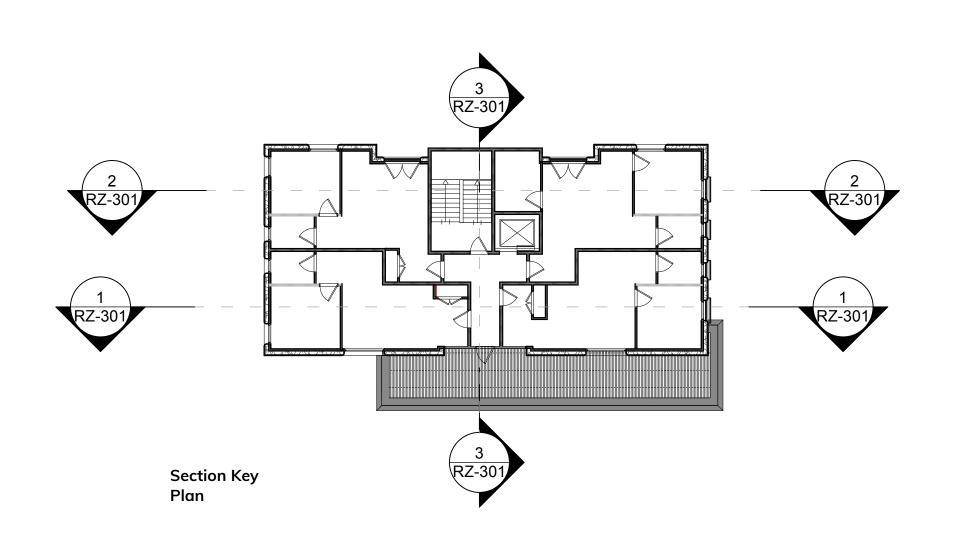


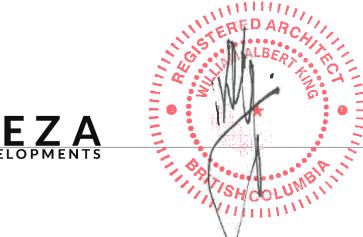



James Bay Development

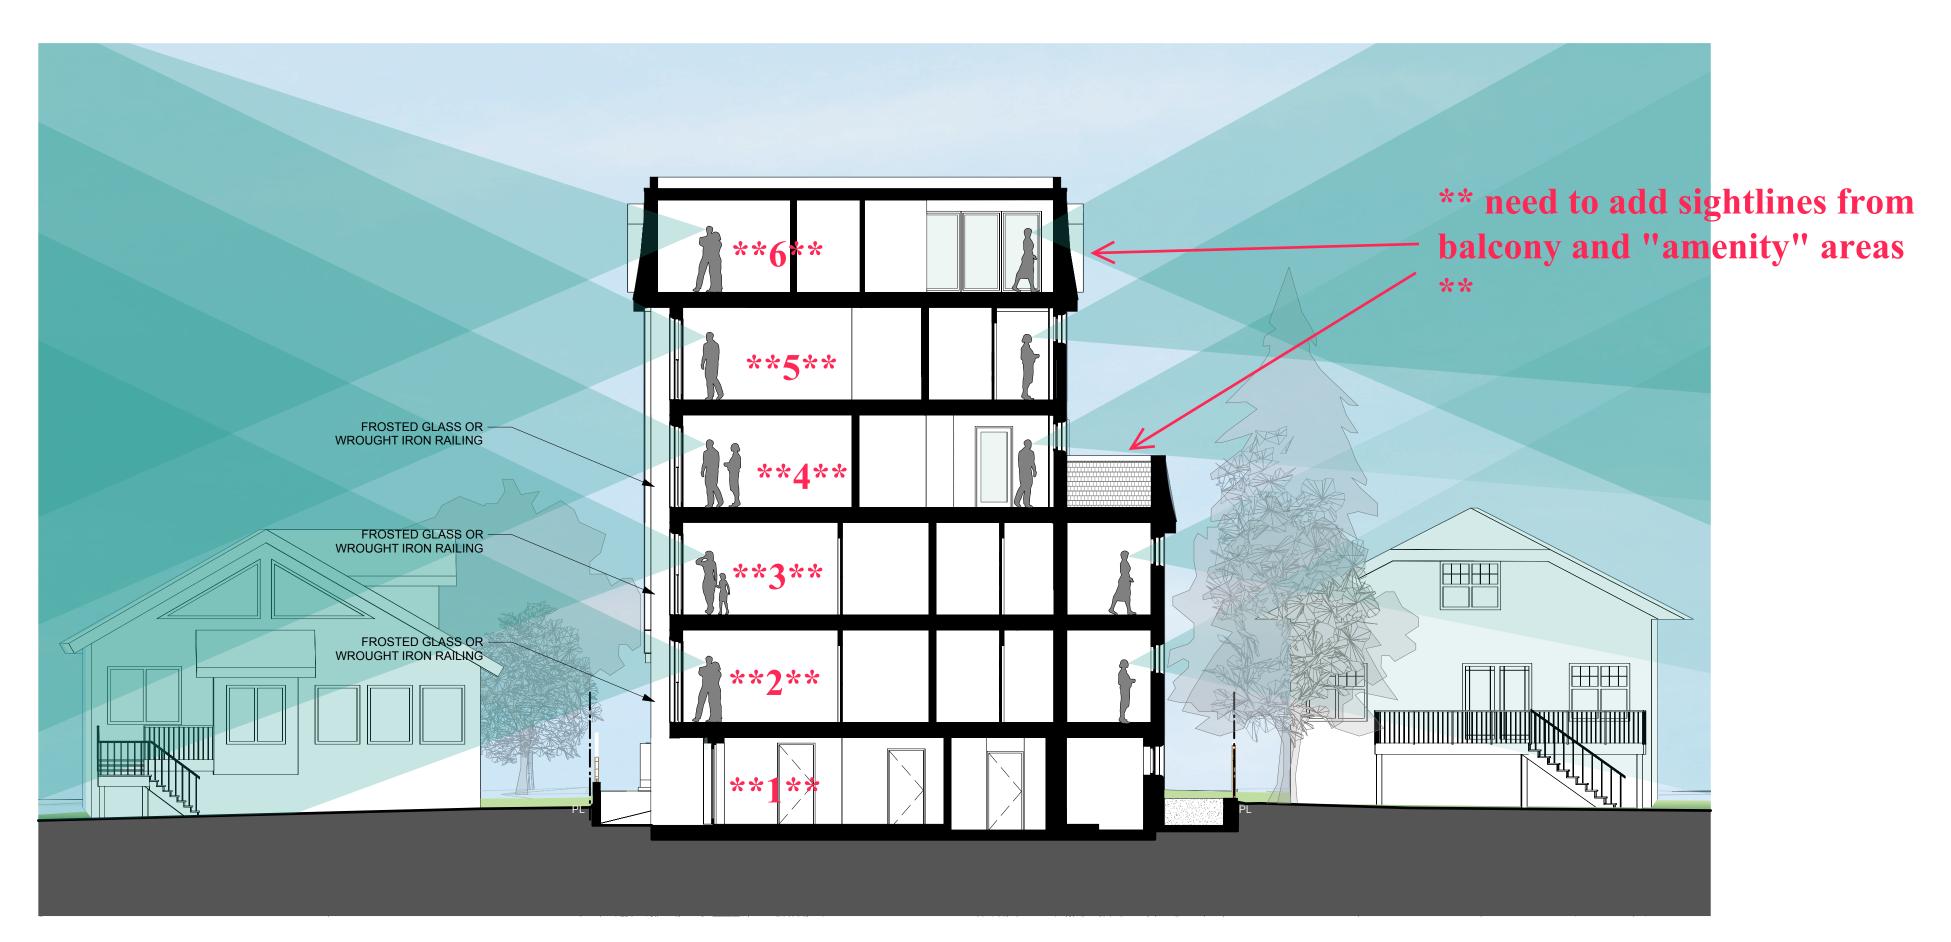

Sightlines (Section)
Scale: 1:100

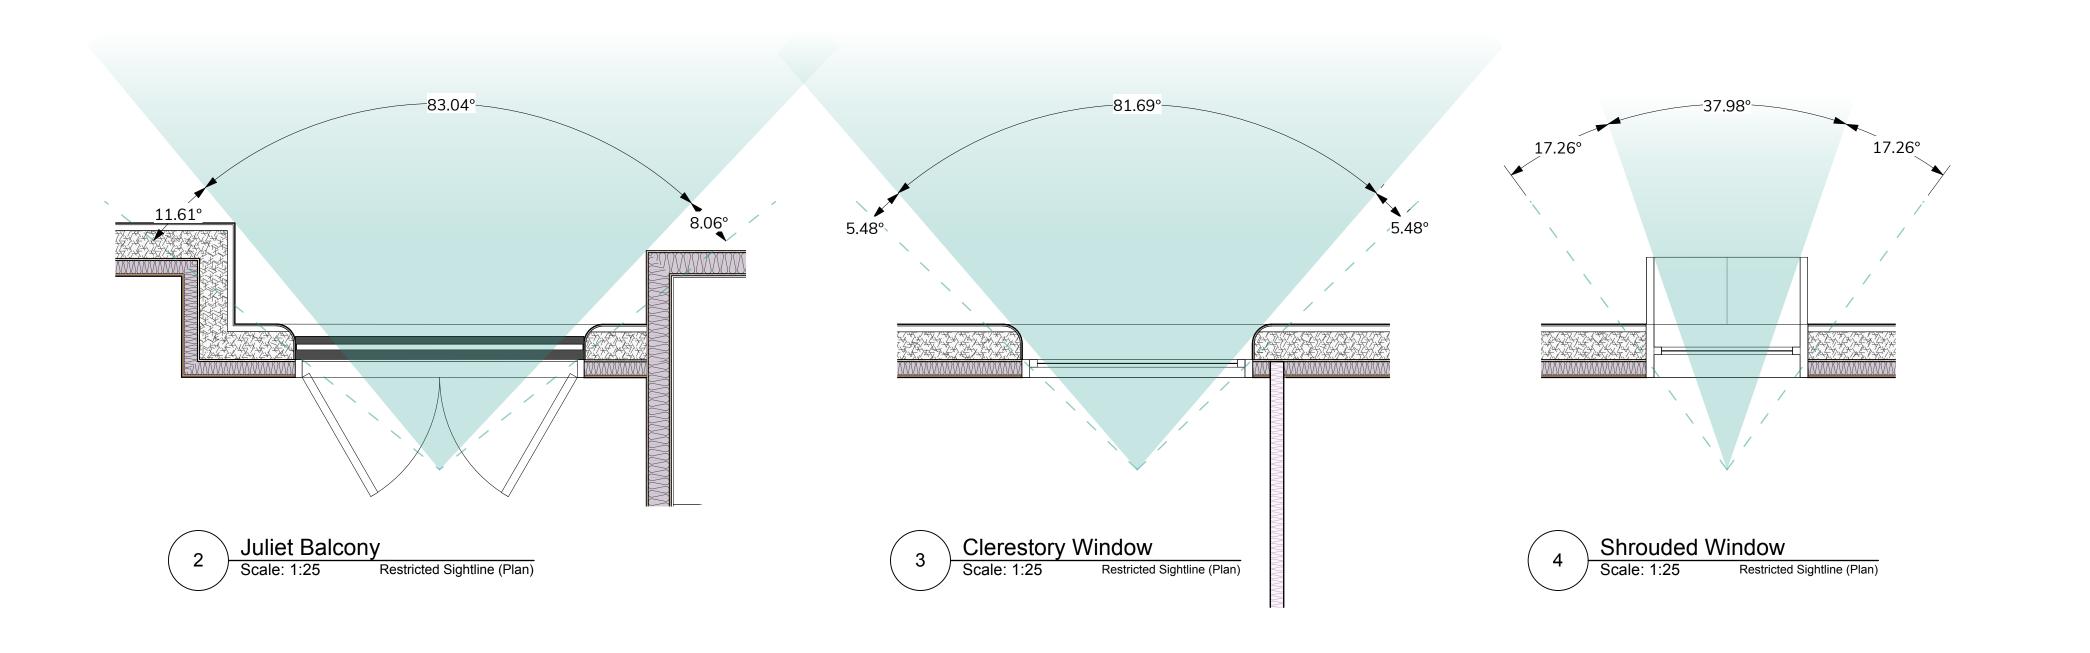

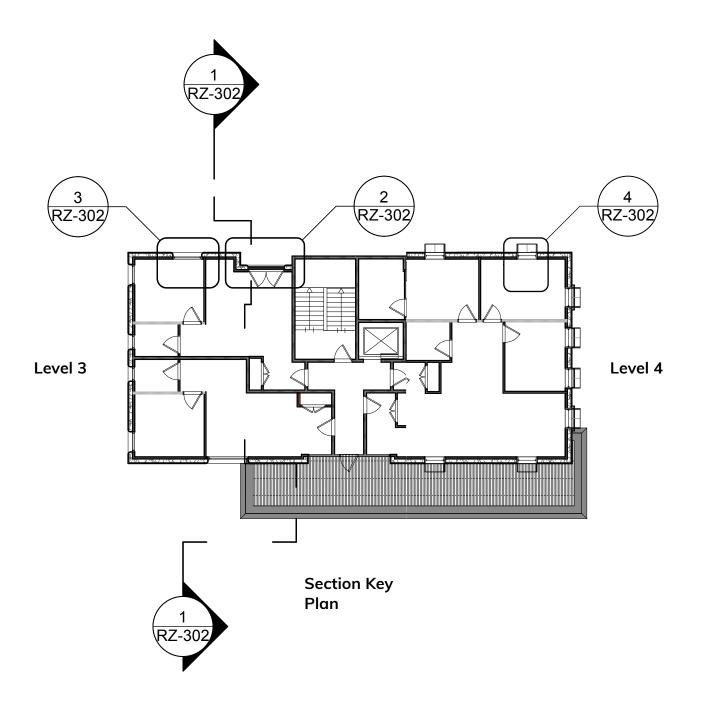


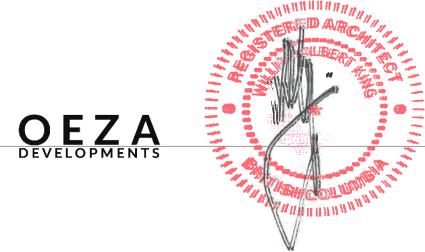


ARCHITECTURE
IMPORTANT: copyright reserved. This design and drawing is the exclusive property of Waymark Architecture and cannot be used for any purpose without the written consent of the Architect.

| | BCBC REFERENCE References are to division B unless noted [A] |
|---|---|
| 2018 BC building code, data matrix part 3 (Project in-stream) | References are to division B unless noted [A] |
| Project Description New Construction | for division A or [C] for division C. |
| Project Description: New Construction | |
| Major Occupancy: Residential group C | 3.1.2.1 |
| Building area: 114.3 m ² | 1.4.1.2 [A] |
| Number of stories: 5 | 3.2.1.1 |
| Number of streets/fire fighter access: 1 | 3.2.2.10 |
| | |
| Principal building is classified as following: | |
| 3.2.2.50. Group C, up to 6 Storeys, Sprinklered | |
| The building is permitted to be of combustible construction or noncombustible construction used singly or in combination | 3.2.2.50. |
| Floor assemblies shall be fire separations with a fire-resistance rating not less than 1 h | 3.2.2.50. |
| Roof assemblies shall have a fire-resistance rating not less than 1 h | 3.2.2.50. |
| Adjacent Occupancies: C | |
| Sprinklered : Yes | 3.2.2.50. |
| Spriiklered : res | |
| Fire alarm: Yes | 3.2.4. |
| Standpipe required: Yes | 3.2.9. |
| Water service/supply is adequate: Yes | 3.2.5.7 |
| This project will be subject to 3.2.10: Requirements for Residential Buildings with a Single Exit | 3.2.10. |
| Occupant load based on: m²/person and design of building | |
| The occupant load for residential suites is two persons per sleeping room: Basement = 6 persons (1 3-bedroom units) 1st floor = 8 persons (2 1-bedroom units, 1 2-bedroom unit) 2nd floor = 10 persons (3 1-bedroom units, 1 2-bedroom unit) 3rd floor = 8 persons (4 1-bedroom units) 4th floor = 8 persons (2 1-bedroom units, 1 3-bedroom unit) 5th floor = 12 persons (2 3-bedroom units) | 3.1.17.1 |
| For storage garage: Occupant load = Garage area / 46 (sm/person) Bike parking :(69.7m² + 7.6m²) = 77.3m² / 46m² = 1.7 (2 persons) | |
| Total occupancy = 54 persons | |
| Minimum number of exits per unit required: 1, proposed 1 | 3.2.10. |

| DATA SHEET/ZONING ANALYSIS | 226 122 Lat 9 Backley Earm Victoria District | - Dlan 220 | |
|--|--|--|--|
| STREET ADDRESS: 50 Government St | -326-122, Lot 9, Beckley Farm, Victoria District | ., Plan 229 | |
| CURRENT ZONING: GRD-1 Priority Grover Property Control of the Priority Grover GRD-1 Priority GRD-1 Priori | | | |
| SUILDING FOOTPRINT: 303.39 m ² | | | |
| OILDING FOOTPRINT: 303.39 m² | | | |
| Zoning Criteria | Proposal | GRD-1 PGA | Victoria 2050 OCP vision |
| Site Area (m²) (min.) | 586.27 m² | 540 m² | |
| treet Frontage (m) (min.) | 17.07 m | 30 (for 5 storey buildings) | *Variance requested to meet lot width |
| otal floor area (m²) (max.) | 1250.5 m² | | |
| loor Space Ratio | 2.13 | 1.6 up to 2.6 (Schedule C - Density Benefits) | Site is in a Priority Growth Area, with density envisioned up to 2.6 FSR |
| Init floor area (m²) (min.) | 44.89 m² | | |
| avg Grade | 17.75 m | | |
| Building Height (m) (max.) | 16.57 m | 17m for 4-5 storey buildings | Buildings that transition between smaller existing buildings and newer larger developments up to 6 storeys |
| Storeys (max.) | 5 storeys | 6 | Buildings up to six storeys, and taller in some areas |
| Setbacks (m) (min.) | | | |
| ront Setback | 5.19m | 5.0 | |
| Rear (NW) | 5.65 m | 8 (or 25% lot depth) | *Variance requested. Setbacks are similar to others in neighbourhood |
| ide (NE) | 1.55 m | 7.5 m up to 4 storeys, 9.0 above | *Variance requested. Setbacks are similar to others in neighbourhood |
| ide (SW) | 2.19 m | 7.5 mup to 4 storeys, 9.0 | *Variance requested. Setbacks are similar to others in neighbourhood |
| ite Coverage | 51.75% | 60% | |
|)pen site space - lot (min.) | 2.19 m 51.75% 41.21% 13.53% 10 - Visitor | 30% | |
| andscape Area | 13.53% mine | 10% | |
| Off Street Parking | wor co. | | |
| * | * | Dwelling Units Secured as | |
| Car Parking | 0 - Visitor 1 - Car Share for Residents | Rental 17 spaces 2 - Visitor 19 - Total | Car share parking space will have an electric car charger |
| accessible | 0 | 0 | |
| an accessible | 1 | 1 | |
| icycle storage | | | |
| ong Term | 38* | 18 | *Bike stalls in excess of those required could be replaced with mobility scooter parking according to resident need. |
| hort Term Bicycle parking | 6 | 6 | |
| INIT TYPES | | | |
| 1 One Bedroom units @ 44.9 to 64.1 m | 12 | | |
| Two Bedroom units @ 67.7 to 86.7 m² | | | |
| Three Bedroom units @ 86.7 -100.6 m | n ² | | |

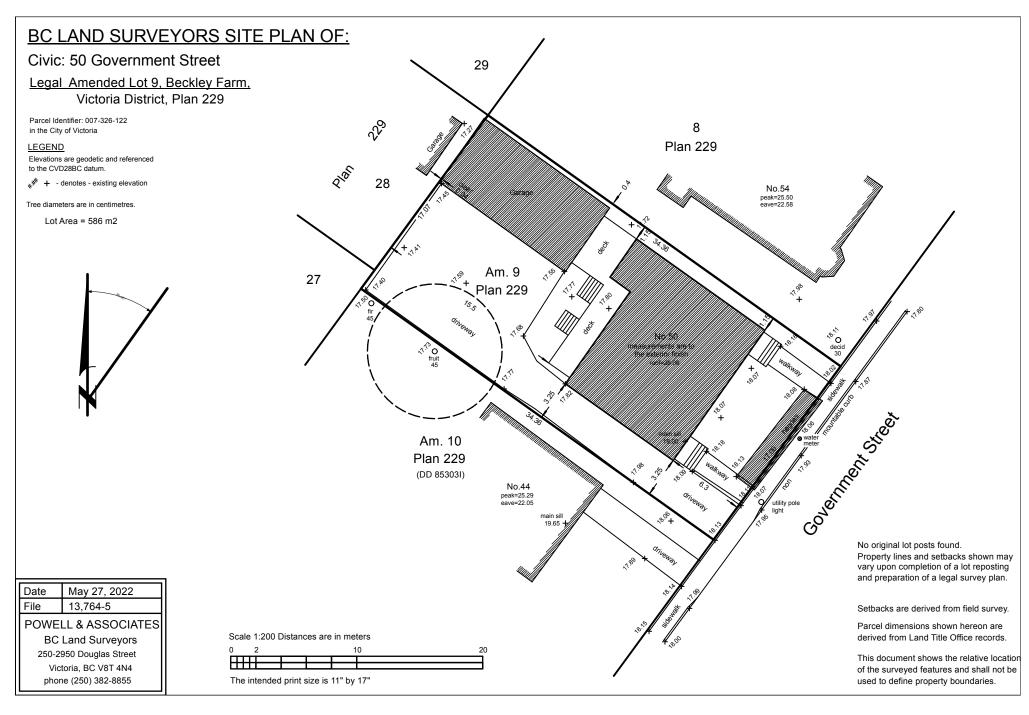



Parking required for 50 Government:

0.75 spaces per unit <45 m²- 1 unit 0.9 space per unit 45<70 m² - 10 units 1.3 spaces per unit >70 m² - 5 units

= (0.75x1) + (0.9x10) + (1.3x5) = 0.75 + 9 + 6.5= 16.25 = 17z car parking spaces

Visitor parking: 0.1 per unit

 $= 0.1 \times 17$

= 1.7= 2 visitor spaces

Required bikes: 1.25 per unit >45 m² 1 per unit <45 m² = (1.25 x 16) + (1x1) = 21

= 21 bike parking stalls

Visitor bikes required: 6

PROPOSED:


1 car share for residents1 visitor parking space (sized for accessible van use)

38 total bike parking 9 wall mounted

29 ground mounted, including 23 regular bike and 6 oversized bike stalls (>1/4 of required stalls)






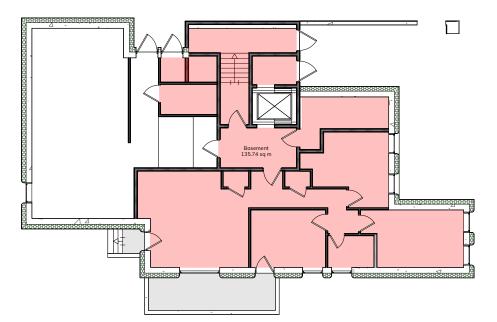


Level 1 (FSR Calculation) Scale: 1:200

Elsewhere called basement

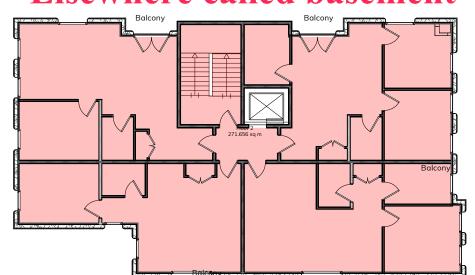

Level 3 Floor Area (FSR Calculation) Scale: 1:200


Elsewhere called level 2

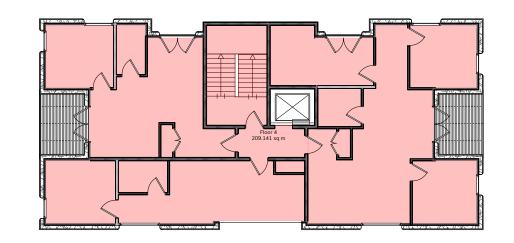

Elsewhere called level 4


Level 5 Area (FSR Calculation)
Scale: 1:200
Area 209.141 mix

Scale: 1:200

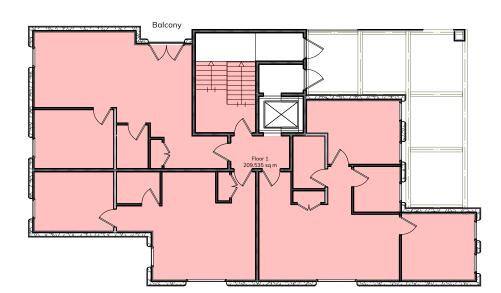


Level 2 Floor Area (FSR Calculation) Scale: 1:200 Area 209.535 m²

Elsewhere called level 1

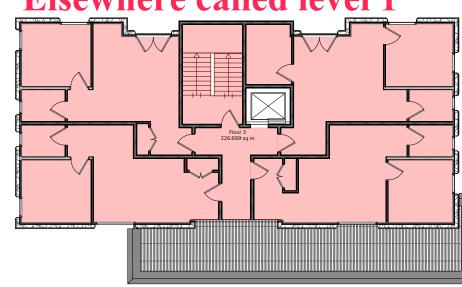

Level 4 Area (FSR Calculation)

Elsewhere called level 3

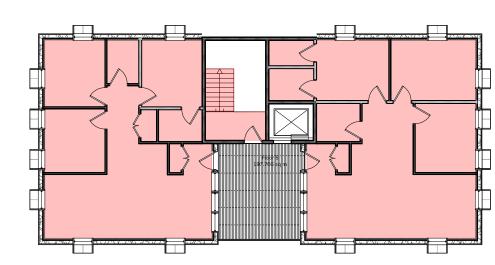

Level 6 Level 5 Area (FSR Calculation)
Scale: 1:200


Area 197.766 m2

Lot Area: 586.276 m²


Floor Areas: Level 1: 135.740 m² Level 2: 209.535 m² Level 3: 271.656 m² Level 4: 226.699 m² Level 5: 209.141 m² Level 6: 197.766 m² **Total Floor Area**

Floor Space Ratio 2.13:1

1250.537m²

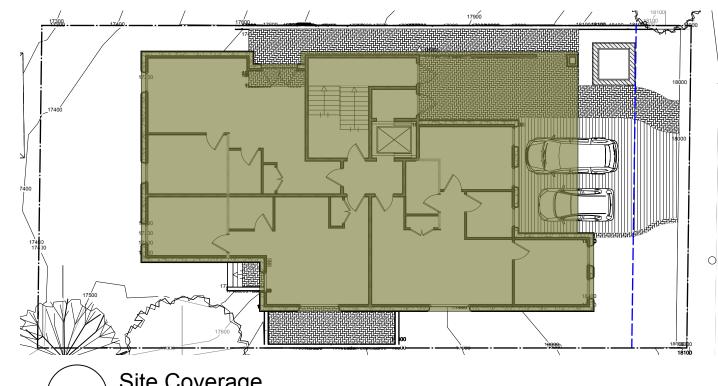

Site Coverage Scale: 1:200 Building Area 303.39 m² Site Area 586.27 m² Site Coverage 51.75%

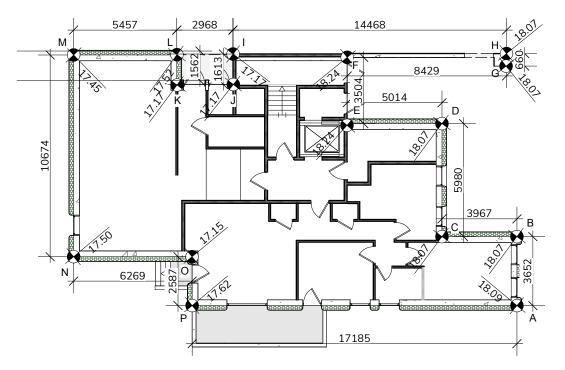

Average Grade Calculation

Scale: 1:200

Average Grade Calculation:

 $A \& B (18.09 + 18.07) / 2 \times 3.65 = 65.99$ B & C (18.07 + 18.07 /2 x 3.97 = 71.74 C & D (18.07 + 18.07) /2 x 5.98 = 108.06 D & E (18.07 + 18.24) /2 x 5.01= 90.96 E & F (18.24 + 18.24) /2 x 3.50 = 63.84 F & G (18.24 + 18.07) /2 x 8.43 = 153.05 G & H (18.07 + 18.07) /2 x 0.66 = 11.93 H & I (18.07 + 17.17) /2 x 14.47 = 254.96 I & J (17.17 + 17.17) /2 x 1.61 = 27.64 J & K (17.17 + 17.17) /2 x 2.97 = 50.99 K & L (17.17 + 17.52) /2 x 1.56 = 27.06 L & M (17.52 + 17.45) /2 x 5.46 = 95.47 M & N (17.45 + 17.50) /2 x 10.67 = 186.46 N & O (17.50 + 17.15) /2 x 6.27 = 108.63 O & P (17.15 + 17.62) /2 x 2.59 = 45.03 P & A (17.62 + 18.09) /2 x 17.19 = 306.93

Total = 1668.74, Perimeter = 93.99 1670.27 / 93.99 = 17.75

Average Grade: 17.75


Table 3.2.3.1-D, BCBC

 $AREA = 200.82 \text{ m}^2$

DISTANCE TO PROPERTY LINE =5.65 m

PROPOSED UNPROTECTED AREA = 42.06 m²

UNPROTECTED OPENING ALLOWED 40%, 80.33 m² PROPOSED OPENING 20.94%

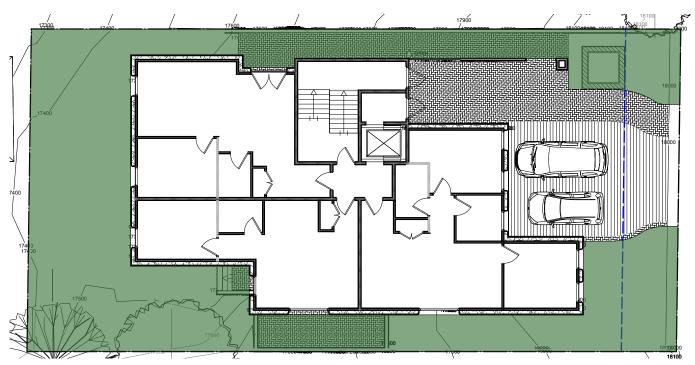

Open Site Space
Scale: 1:200 Open Area 2 Open Area 241.58 m² Site Area 586.27 m² Open space 41.21 %

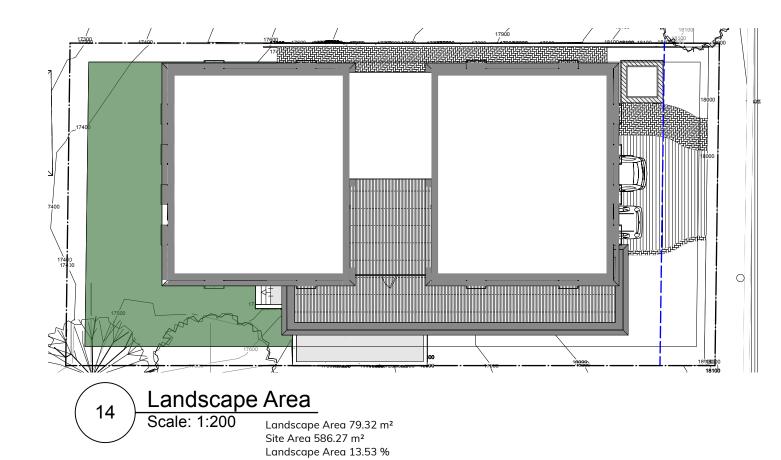





Table 3.2.3.1-D, BCBC DISTANCE TO PROPERTY LINE =2.19 m $AREA = 376.67 \text{ m}^2$ PROPOSED UNPROTECTED AREA = 49.77 m² UNPROTECTED OPENING ALLOWED 16%, 60.27 m²



North Elevation Scale: 1:200

Table 3.2.3.1-D, BCBC DISTANCE TO PROPERTY LINE =1.36 m AREA = 381.62 m² PROPOSED UNPROTECTED AREA = 48.8 m² UNPROTECTED OPENING ALLOWED 14%, 53.43 m²

PROPOSED OPENING 12.79%

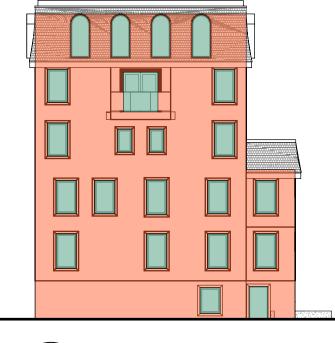

Rear/ West Elevation Scale: 1:200

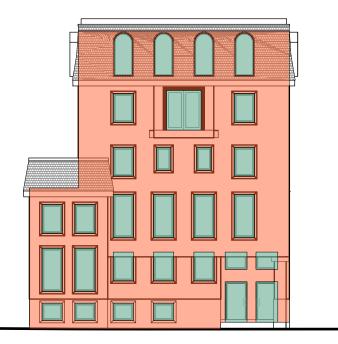


Table 3.2.3.1-D, BCBC LIMITING DISTANCE = 10.08m AREA = 194.16 m² PROPOSED UNPROTECTED AREA = 54.17 m² UNPROTECTED OPENING ALLOWED 100%, 194.16 m² PROPOSED OPENING 27.90%





James Bay Development

PROPOSED OPENING 13.21%




1 Equinox @ 9:00am Scale: 1:500



4 Scale: 1:500 Summer Soltice @ 9:00am



7 Winter Solstice @ 9:00am
Scale: 1:500

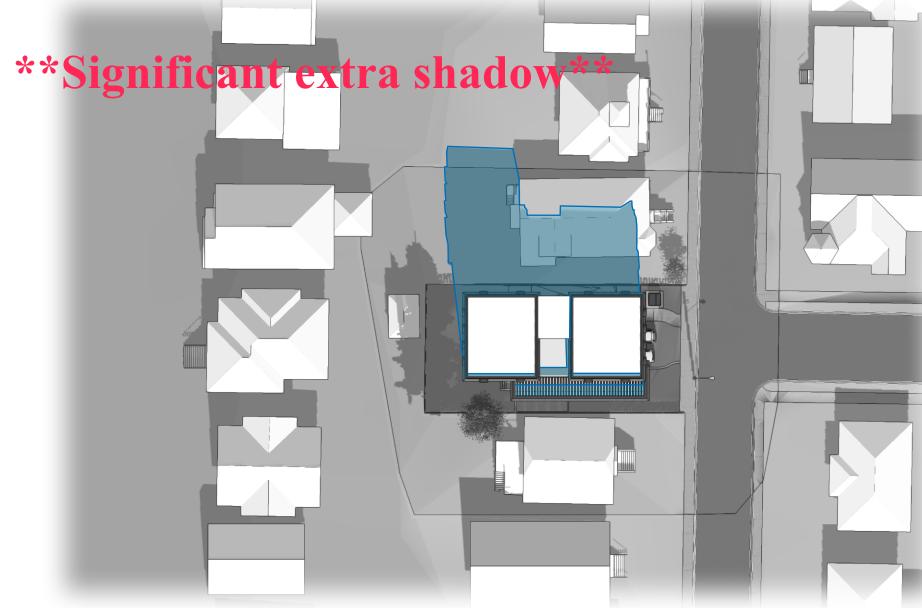


2 Equinox @ 12:00pm Scale: 1:500



5 Summer Soltice @ 12:00pm
Scale: 1:500



8 Winter Solstice @ 12:00pm
Scale: 1:500

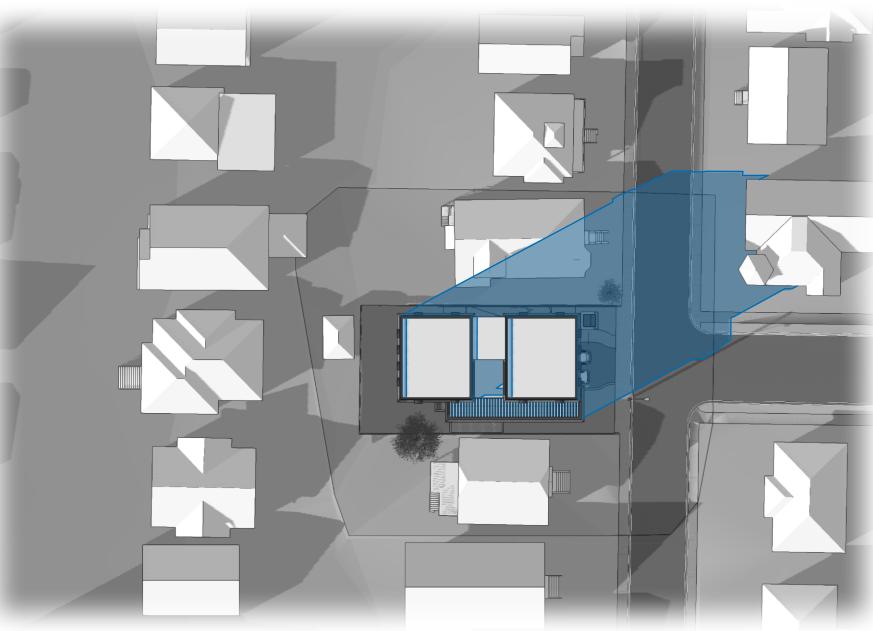

3 Equinox @ 4:00pm Scale: 1:500



6 Summer Soltice @ 4:00pm
Scale: 1:500



9 Winter Solstice @ 4:00pm Scale: 1:500

OEZADEVELOPMENTS

James Bay Development

50 GOVERNMENT ST

REISSUED FOR REZONING

ARCHITECTS: WAYMARK ARCHITECTURE, INC.

WILL KING will@waymarkarchitecture.com 778.977.0660

GEORGIA MCGRAW georgia@waymarkarchitecture.com

LANDSCAPE ARCHITECT:
G | ALA GAUTHIER + ASSOCIATES LANDSCAPE
ARCHITECTS INC.

BRYCE GAUTHIER bryce@gauthierla.com 604.317.9682

JIAHUI HUANG jiahui@gauthierla.com 778.681.8766

LANDSCAPE DRAWING INDEX PERMIT

Sheet No. Sheet Name

L0.0 COVER SHEET

L0.1 OVERALL SITE PLAN

L0.2 TREE MANAGEMENT PLAN

L0.3 PRECEDENT IMAGES

L1.0 LAYOUT + MATERIALS PLAN - LEVEL 1

L1.1 PLANTING PLAN - LEVEL 1

L1.2 GRADING PLAN - LEVEL 1


L1.3 UTILITY PLAN - LEVEL 1

L1.4 STORMWATER MANGEMENT PLAN - LEVEL 1

L2.0 PLANT LIST + IMAGES



2340

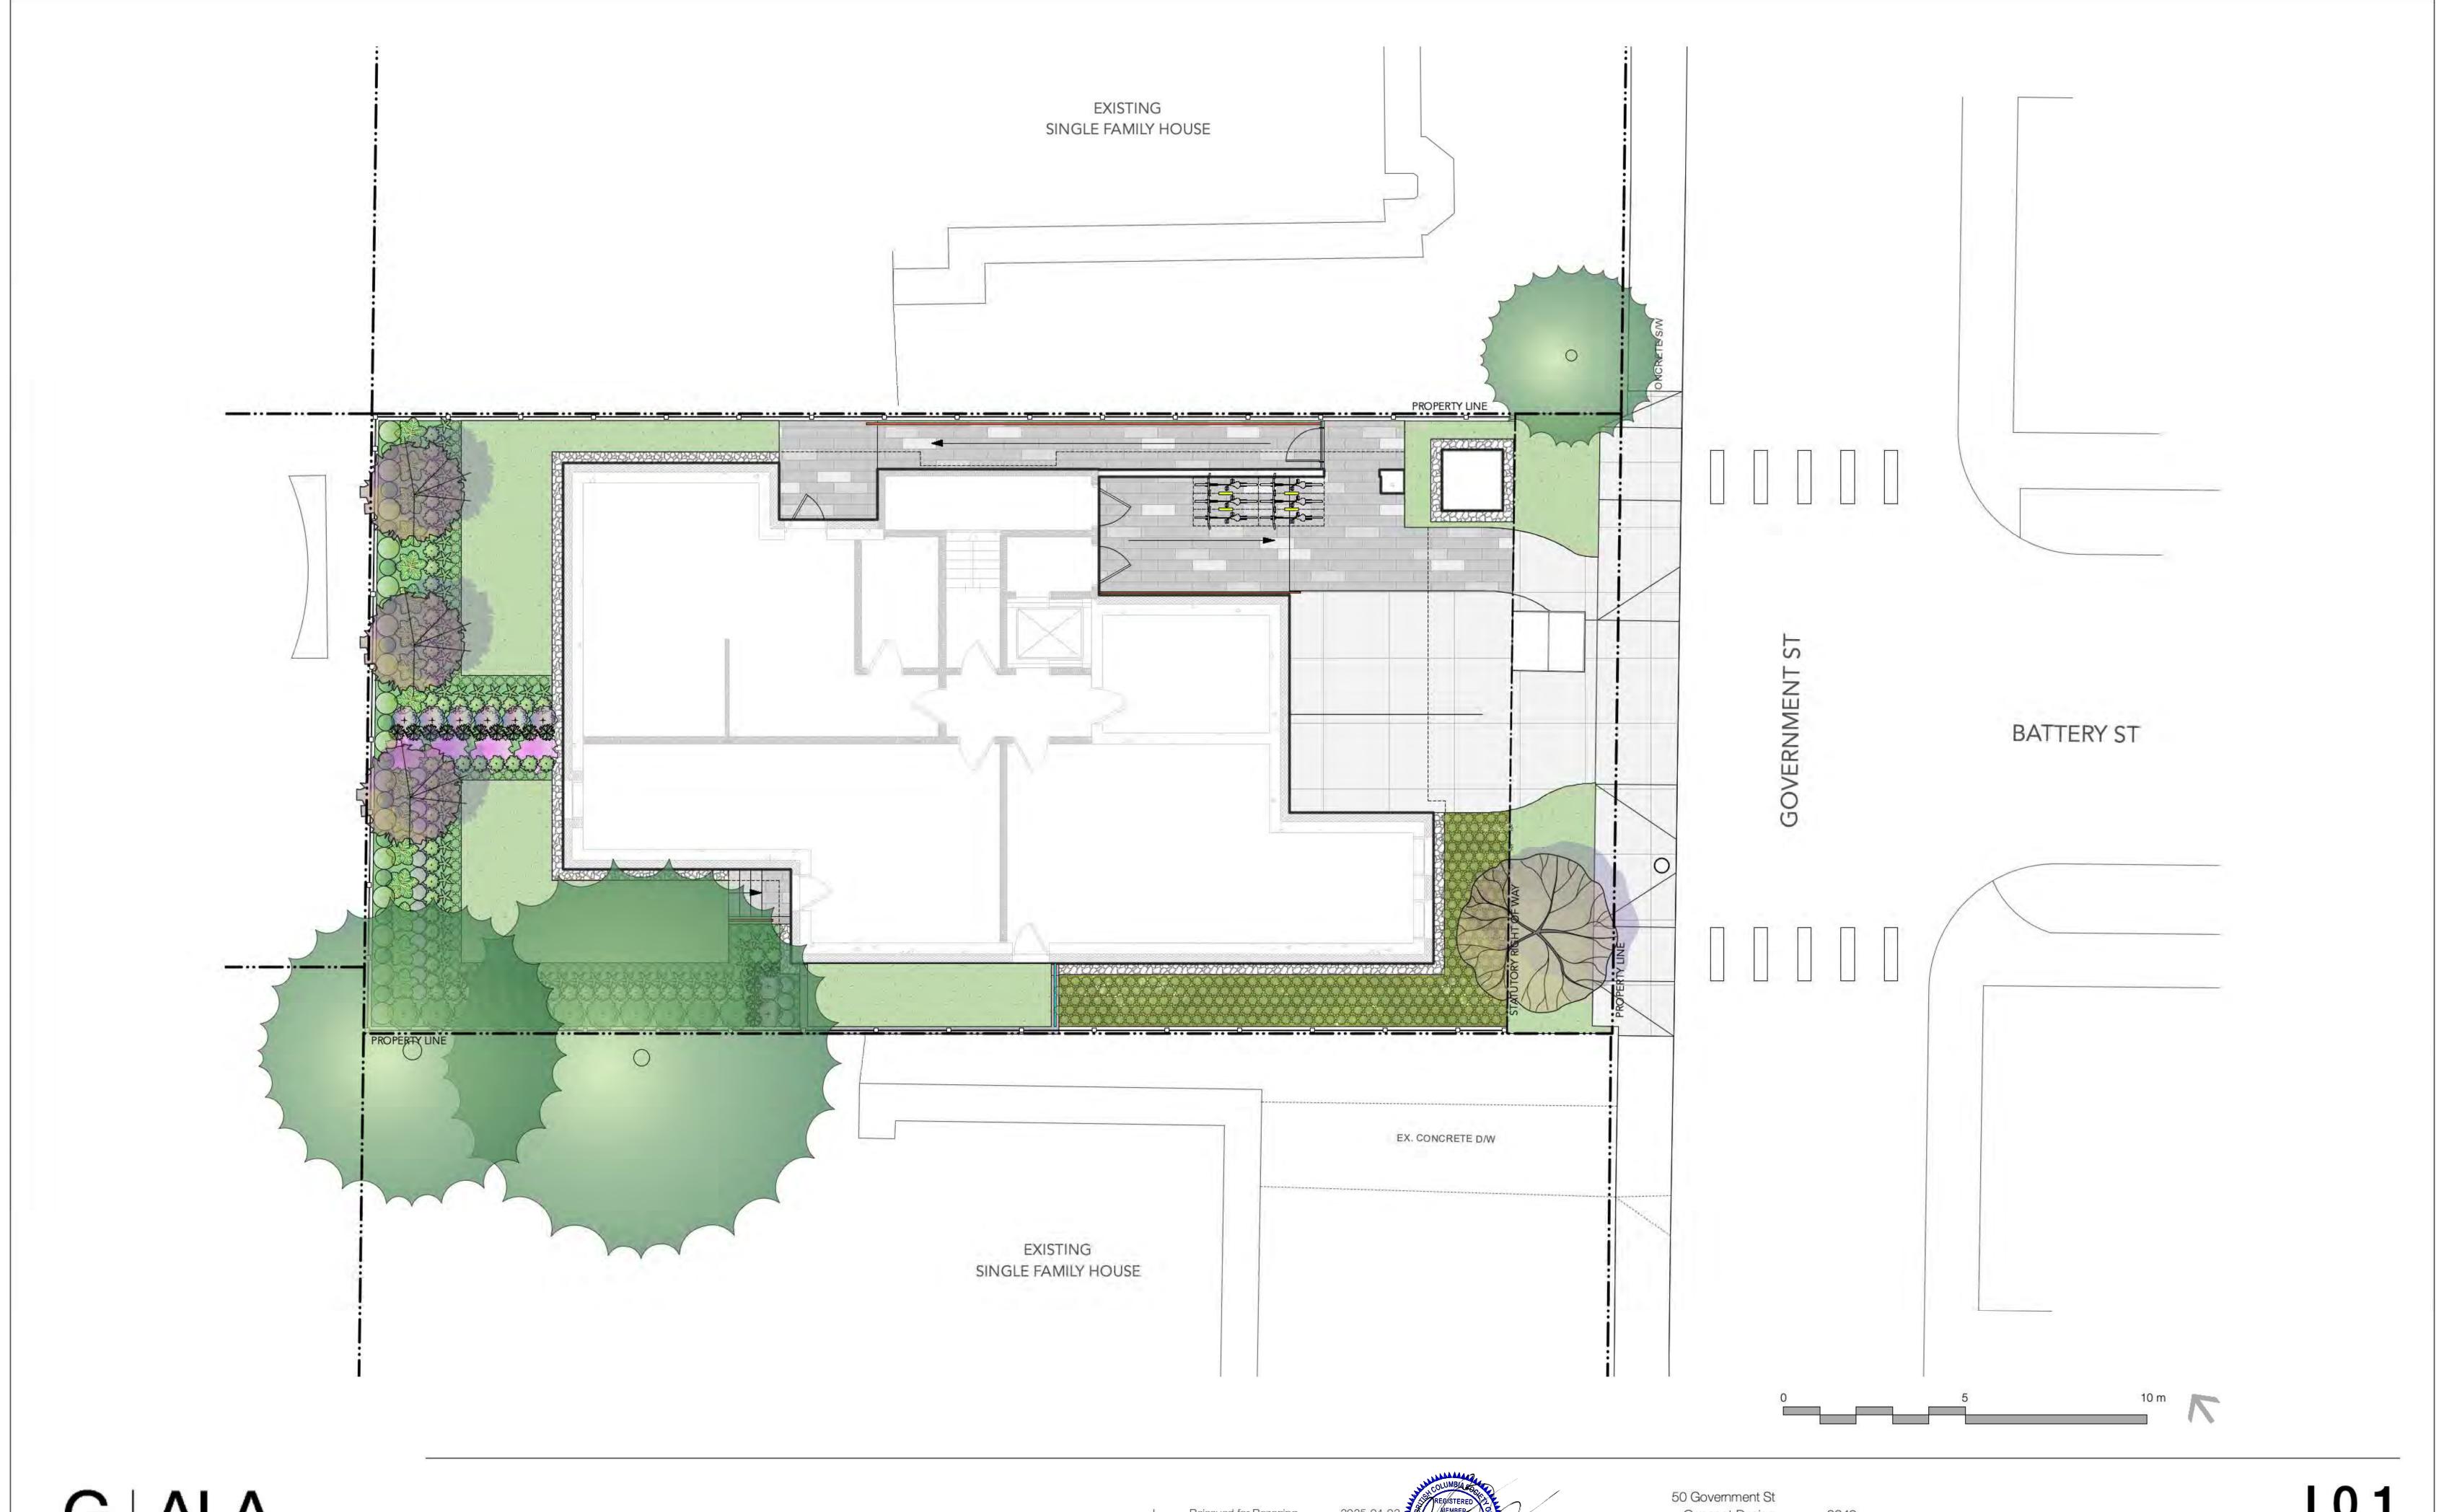

G ALA

Gauthier + Associates Landscape Architects Inc.

Reissued for Rezoning

J Rain Garden Review

Reissued for Rezoning (Draft) 2025-04-02

Concept Design 50 Government Street, Victoria, BC

GENERAL TREE PROTECTION FENCING TYP NOTES:

- 1. ALL COMPONENTS AND WORKMANSHIP TO CONFORM TO BCLNA STANDARDS TYPICAL
- 2. POSITION TREE STAKES INTO DIRECTION OF PREVAILING WINDS IF MINIMUM UTILITY SETBACKS PERMIT.
- 3. ALL TREE STAKES TO HAVE A MINIMUM 1.0m CLEARANCE FROM ALL U/G POWER, TELEPHONE AND GAS ALIGNMENTS.
- 4. ALL ROOTBALL HOLES TO BE DUG BY HAND WHEN CLOSER TO 1.0M (40") TO U/G POWER, TELEPHONE AND GAS ALIGNMENTS. FOR TREES WITH DRIPLINES FROM FROM 3M - 5M (9' - 15') FROM CONSTRUCTION ACTIVITY;
- 5. PLACE STANDARD 'SAFETY ORANGE' SNOWFENCE MIN. OF 4.5M (14'8") FROM TREE TRUNK. EXACT SIZE/SHAPE TO BE DETERMINED ON SITE
- FOR EXCAVATION WITHIN 1-3M (3' 9') OF ANY TREE'S DRIPLINE, ROOT PRUNING REQUIRED TO A DEPTH OF 500MM (20"). IMMEDIATELY AFTER EXCAVATION, PRUNE ALL EXPOSED ROOTS FLUSH WITH THE EXCAVATION WALL.
- 7. A MAXIMUM OF 25% OF ANY TREE'S ROOTS AT THE DRIPLINE SHOULD BE IMPACTED BY EXCAVATION IF THE TREE IS EXPECTED TO SURVIVE.
- 8. INSTALL AND MAINTAIN HOARDING IN CLEAN AND SAFE CONDITION THROUGHOUT CONSTRUCTION PROCESS.
- 9. HOARDING REQUIREMENTS ARE ON ALL EXISTING TREES THROUGHOUT CONSTRUCTION. ALL EQUIPMENT, SOIL, BUILDING MATERIAL AND OTHER DEBRIS SHALL BE KEPT OUTSIDE THE HOARDING.
- 10. IF HOARDING IS PUNCTURED AND DAMAGE OCCURS TO HOARDED TREE(S). NOTIFY LANDSCAPE ARCHITECT.
- 11. THE BEST METHOD TO AVOID SOIL COMPACTION IS TO KEEP OFF. THIS INCLUDES RESTRICTING ALL TRAFFIC BOTH VEHICULAR AND PEDESTRIAN FROM CROSSING OVER THE ROOT ZONES, AND RESTRICTING EVEN TEMPORARY MATERIAL STORAGE UNDER TREES.
- 12. EXCAVATION AROUND TREES WITHIN DRIP LINE OF TREES ONLY WHERE INDICATED ON PLANS AND AS DIRECTED BY THE CONSULTANT.
- 13. DURING ANY EXCAVATION WITHIN THE DRIP LINE OF A TREE THE CONTRACTOR SHALL EXCAVATE AROUND TREE ROOTS AS DIRECTED BY THE CONSULTANT. DO NOT CUT TREE ROOTS UNLESS DIRECTED BY THE CONSULTANT.
- 14. TREES AND OTHER DESIRABLE VEGETATION TO BE TOTALLY FENCED. FENCING TO BE MAINTAINED FOR THE DURATION OF THE PROJECT.
- 15. EXCAVATION FOR NEW CONSTRUCTION WITHIN THE DRIP LINES OF TREES: HAND EXCAVATE TO MINIMIZE DAMAGE TO ROOT SYSTEMS
- 16. USE NARROW TINE SPADING FORKS TO PROBE AND COMB SOIL TO EXPOSE ROOTS;
- 17. RELOCATE ROOTS INTO BACKFILL AREAS WHENEVER POSSIBLE, IF LARGE MAIN LATERAL ROOTS ARE ENCOUNTERED, EXPOSE BEYOND EXCAVATION LIMITS AS REQUIRED TO BEND AND RELOCATE WITHOUT BREAKING.
- 18. UTILITY TRENCHING WITHIN THE DRIP LINES OF TREES: TUNNEL UNDER AND AROUND ROOTS BY HAND DIGGING;
- 19. DO NOT CUT MAIN LATERAL ROOTS;
- 20. CUTTING OF SMALLER ROOTS THAT INTERFERE WITH INSTALLATION OF NEW WORK SHALL BE DONE WITH CLEAN SHARP TREE PRUNING TOOLS;
- 21. ROOTS THAT ARE ENCOUNTERED IMMEDIATELY ADJACENT TO THE LOCATION OF NEW CONSTRUCTION AND ARE TOO DIFFICULT TO RELOCATE SHALL BE CUT 150MM (6") BACK FROM NEW CONSTRUCTION. USE CLEAN SHARP TREE PRUNING TOOLS;
- 22. PROTECTION OF EXPOSED ROOTS: DO NOT ALLOW EXPOSED ROOTS TO DRY OUT PRIOR TO PLACEMENT OF PERMANENT COVER.
- 23. PROVIDE ONE OF THE FOLLOWING TEMPORARY REMEDIAL MEASURES:
- 24. A. PROVIDE TEMPORARY EARTH COVER. MAINTAIN MOISTURE. B. PACK WITH WET PEAT MOSS. MAINTAIN MOISTURE.
- C . PACK WITH FOUR LAYERS OF WET UNTREATED BURLAP. MAINTAIN MOISTURE.
- 25. TEMPORARILY SUPPORT AND PROTECT EXPOSED ROOTS FROM DAMAGE UNTIL PERMANENTLY RELOCATED AND COVERED WITH BACKFILL.
- 26. WATER PUDDLE BACKFILL AROUND ROOTS TO ELIMINATE VOIDS AND AIR POCKETS
- 27. REMOVAL OF STREET TREES TO THE SATISFACTION OF THE GENERAL MANAGER OF ENGINEERING SERVICES.

TREE MANAGEMENT PLAN

SYMBOL

DESCRIPTION




TREE PROTECTION BARRIER FENCE Refer to Tree Protection Notes for Requirements

EXISTING TREE TO BE RETAINED Refer to Arborist Report


TREE PROTECTION

2.4 (MAXIMUM SPAN)


Tree Protection Fencing Specifications: FENCING STANDARD

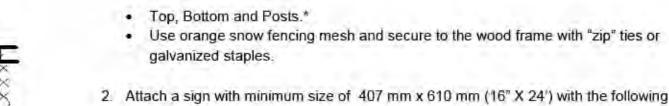

1. The fence will be constructed using 38 x 89 mm (2" x 4") wood frame:



a) DO NOT ENTER- Tree Protection Zone (For retained trees) or;

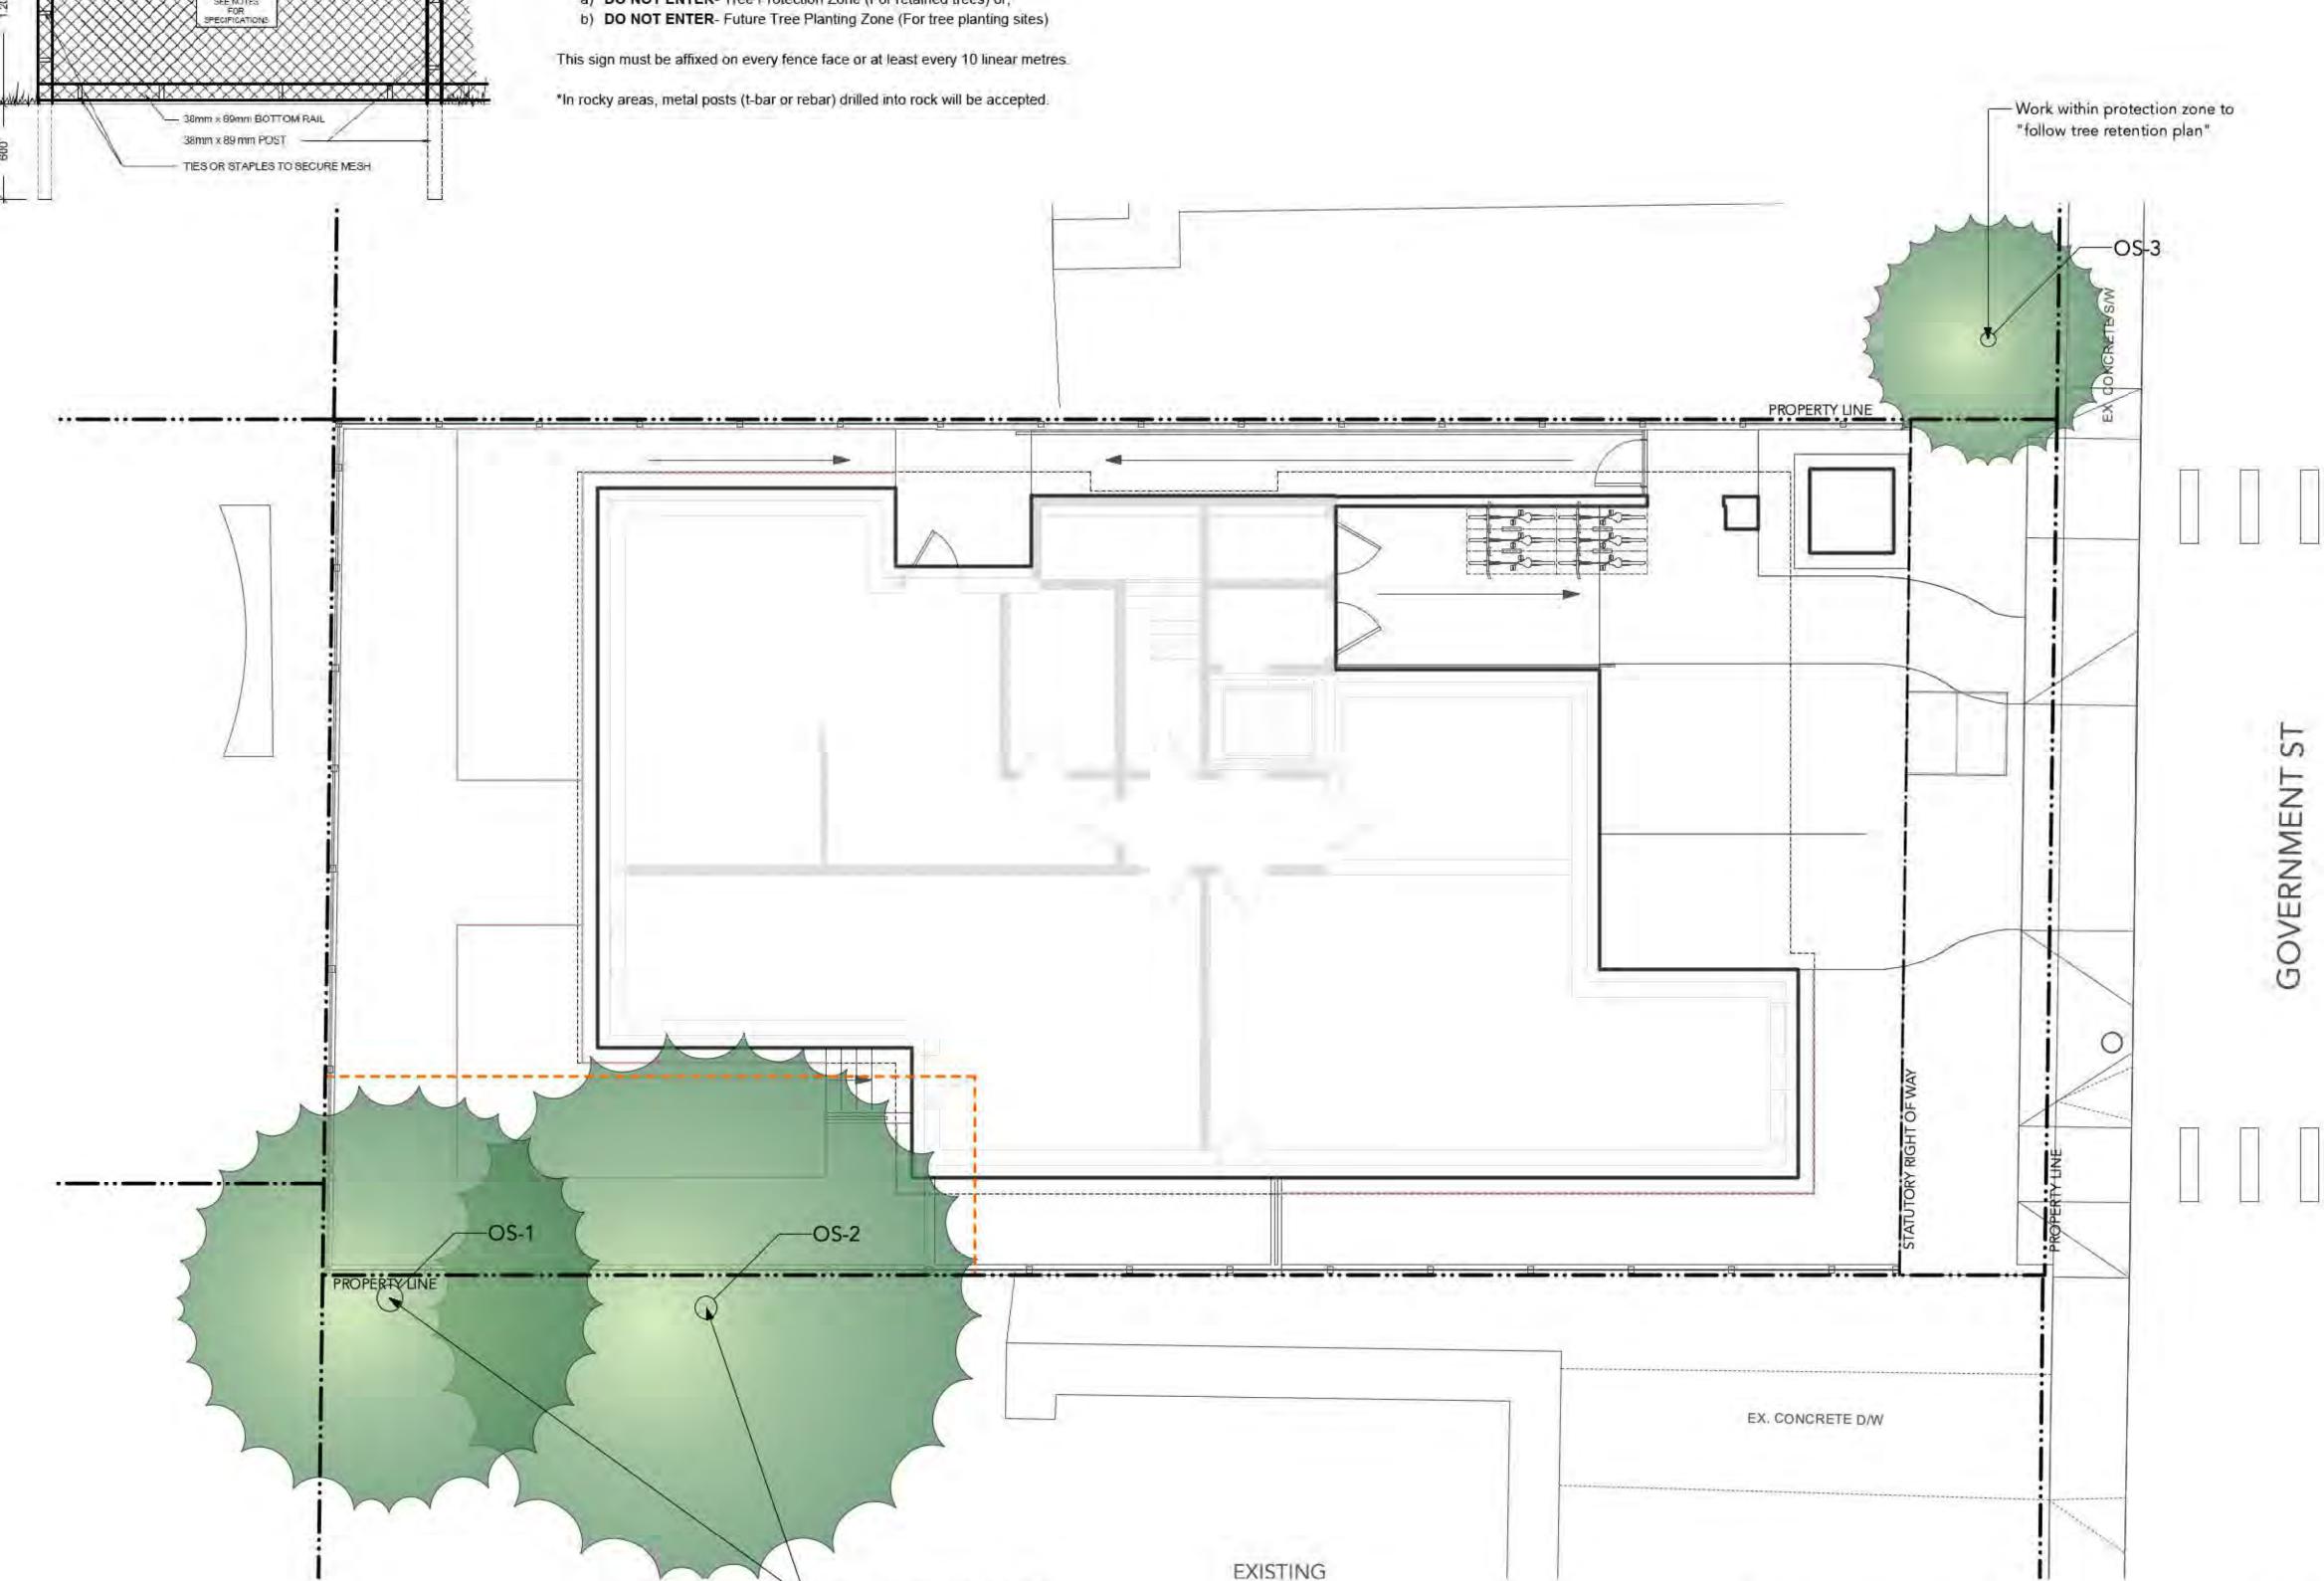





Rain Garden Review

Work within protection zone to


"follow tree retention plan"


Reissued for Rezoning (Draft) 2025-04-0


50 Government St Concept Design 50 Government Street, Victoria, BC

2340

L0.2 TREE MANAGEMENT PLAN

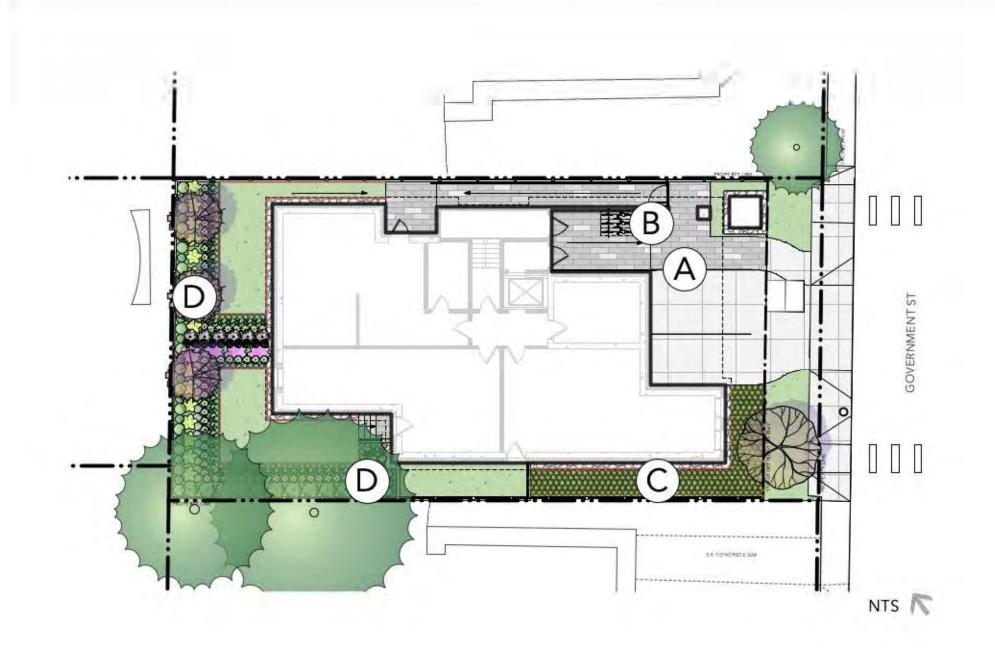


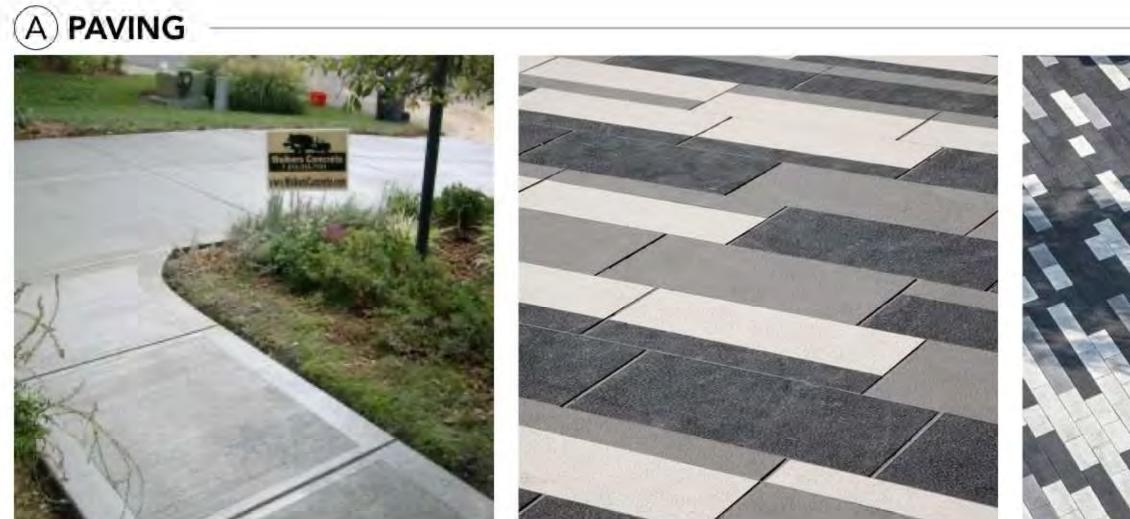

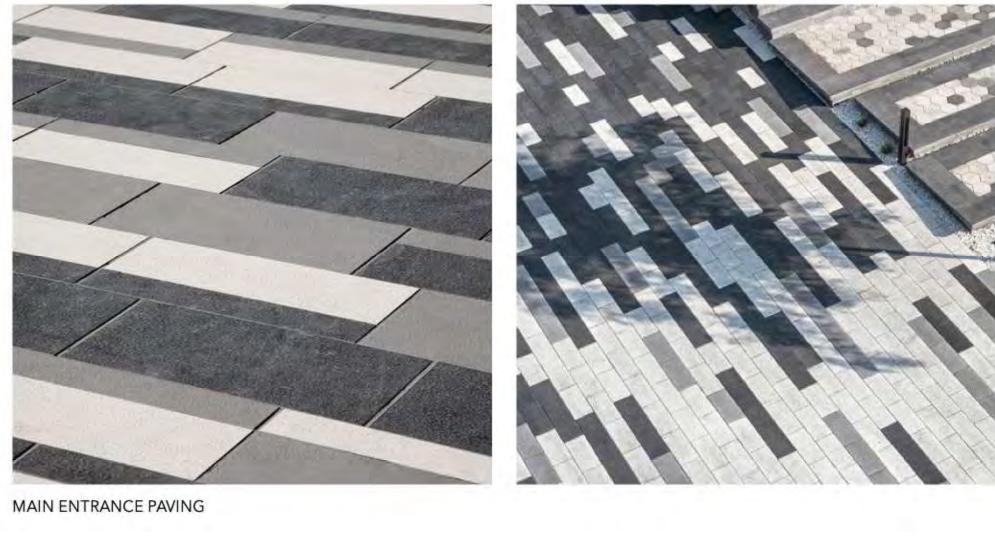



CIP CONCRETE PAVING

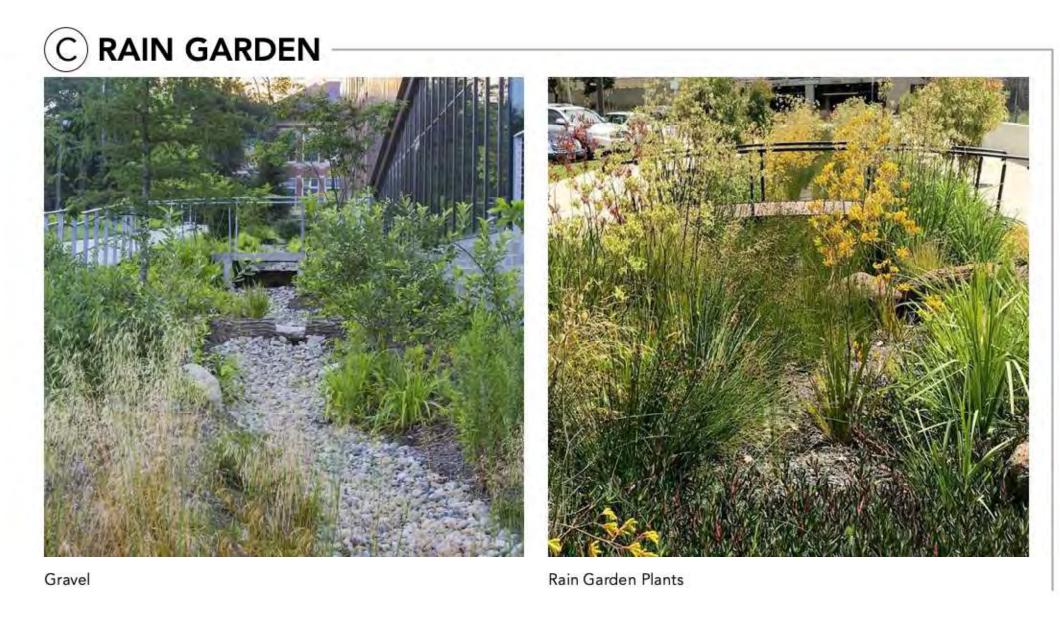






Reissued for Rezoning

Reissued for Rezoning (Draft) 2025-04-0 J Rain Garden Review

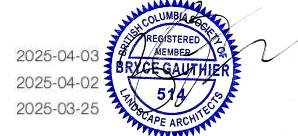

50 Government St Concept Design 50 Government Street, Victoria, BC


2340

PRECEDENT IMAGES


GENERAL LAYOUT + MATERIALS NOTES:

- 1. ALL DIMENSIONS ARE METRIC UNLESS OTHERWISE NOTED, VERIFY ALL DIMENSIONS WITH FIELD CONDITIONS. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT FOR REVIEW AND RESPONSE.
- 2. ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
- 3. UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
- 4. THE LAYOUT OF ALL HARDSCAPE ITEMS, SITE FURNISHINGS, BOULDERS, LANDSCAPE LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- 5. ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
- 6. THIS PLAN IS "NOT FOR CONSTRUCTION" AND IS TO BE SUBMITTED FOR REVIEW TO ENGINEERING SERVICES A MINIMUM OF 8 WEEKS PRIOR TO THE START OF ANY CONSTRUCTION PROPOSED FOR PUBLIC PROPERTY. NO WORK ON PUBLIC PROPERTY MAY BEGIN UNTIL SUCH PLANS RECEIVE "FOR CONSTRUCTION" APPROVAL AND RELATED PERMITS ARE ISSUED. PLEASE CONTACT ENGINEERING, DEVELOPMENT SERVICES AND/OR YOUR ENGINEERING, BUILDING SITE INSPECTOR FOR DETAILS.
- 7. MAINTENANCE AND IRRIGATION WILL BE PROVIDED TO ALL AREAS.


MATERIALS LEGEND

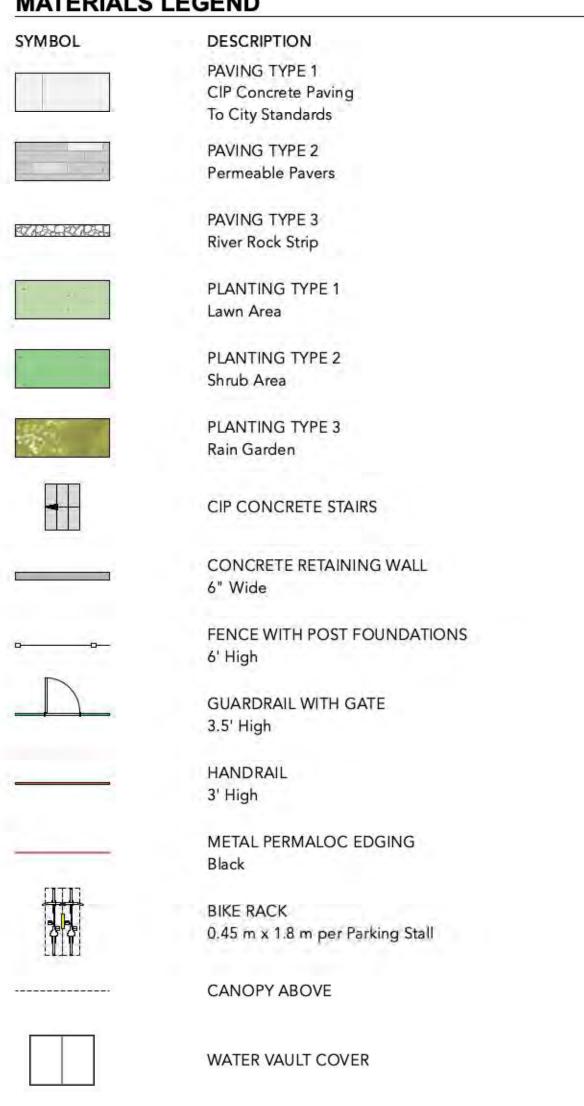

EXISTING UTILITY POLE

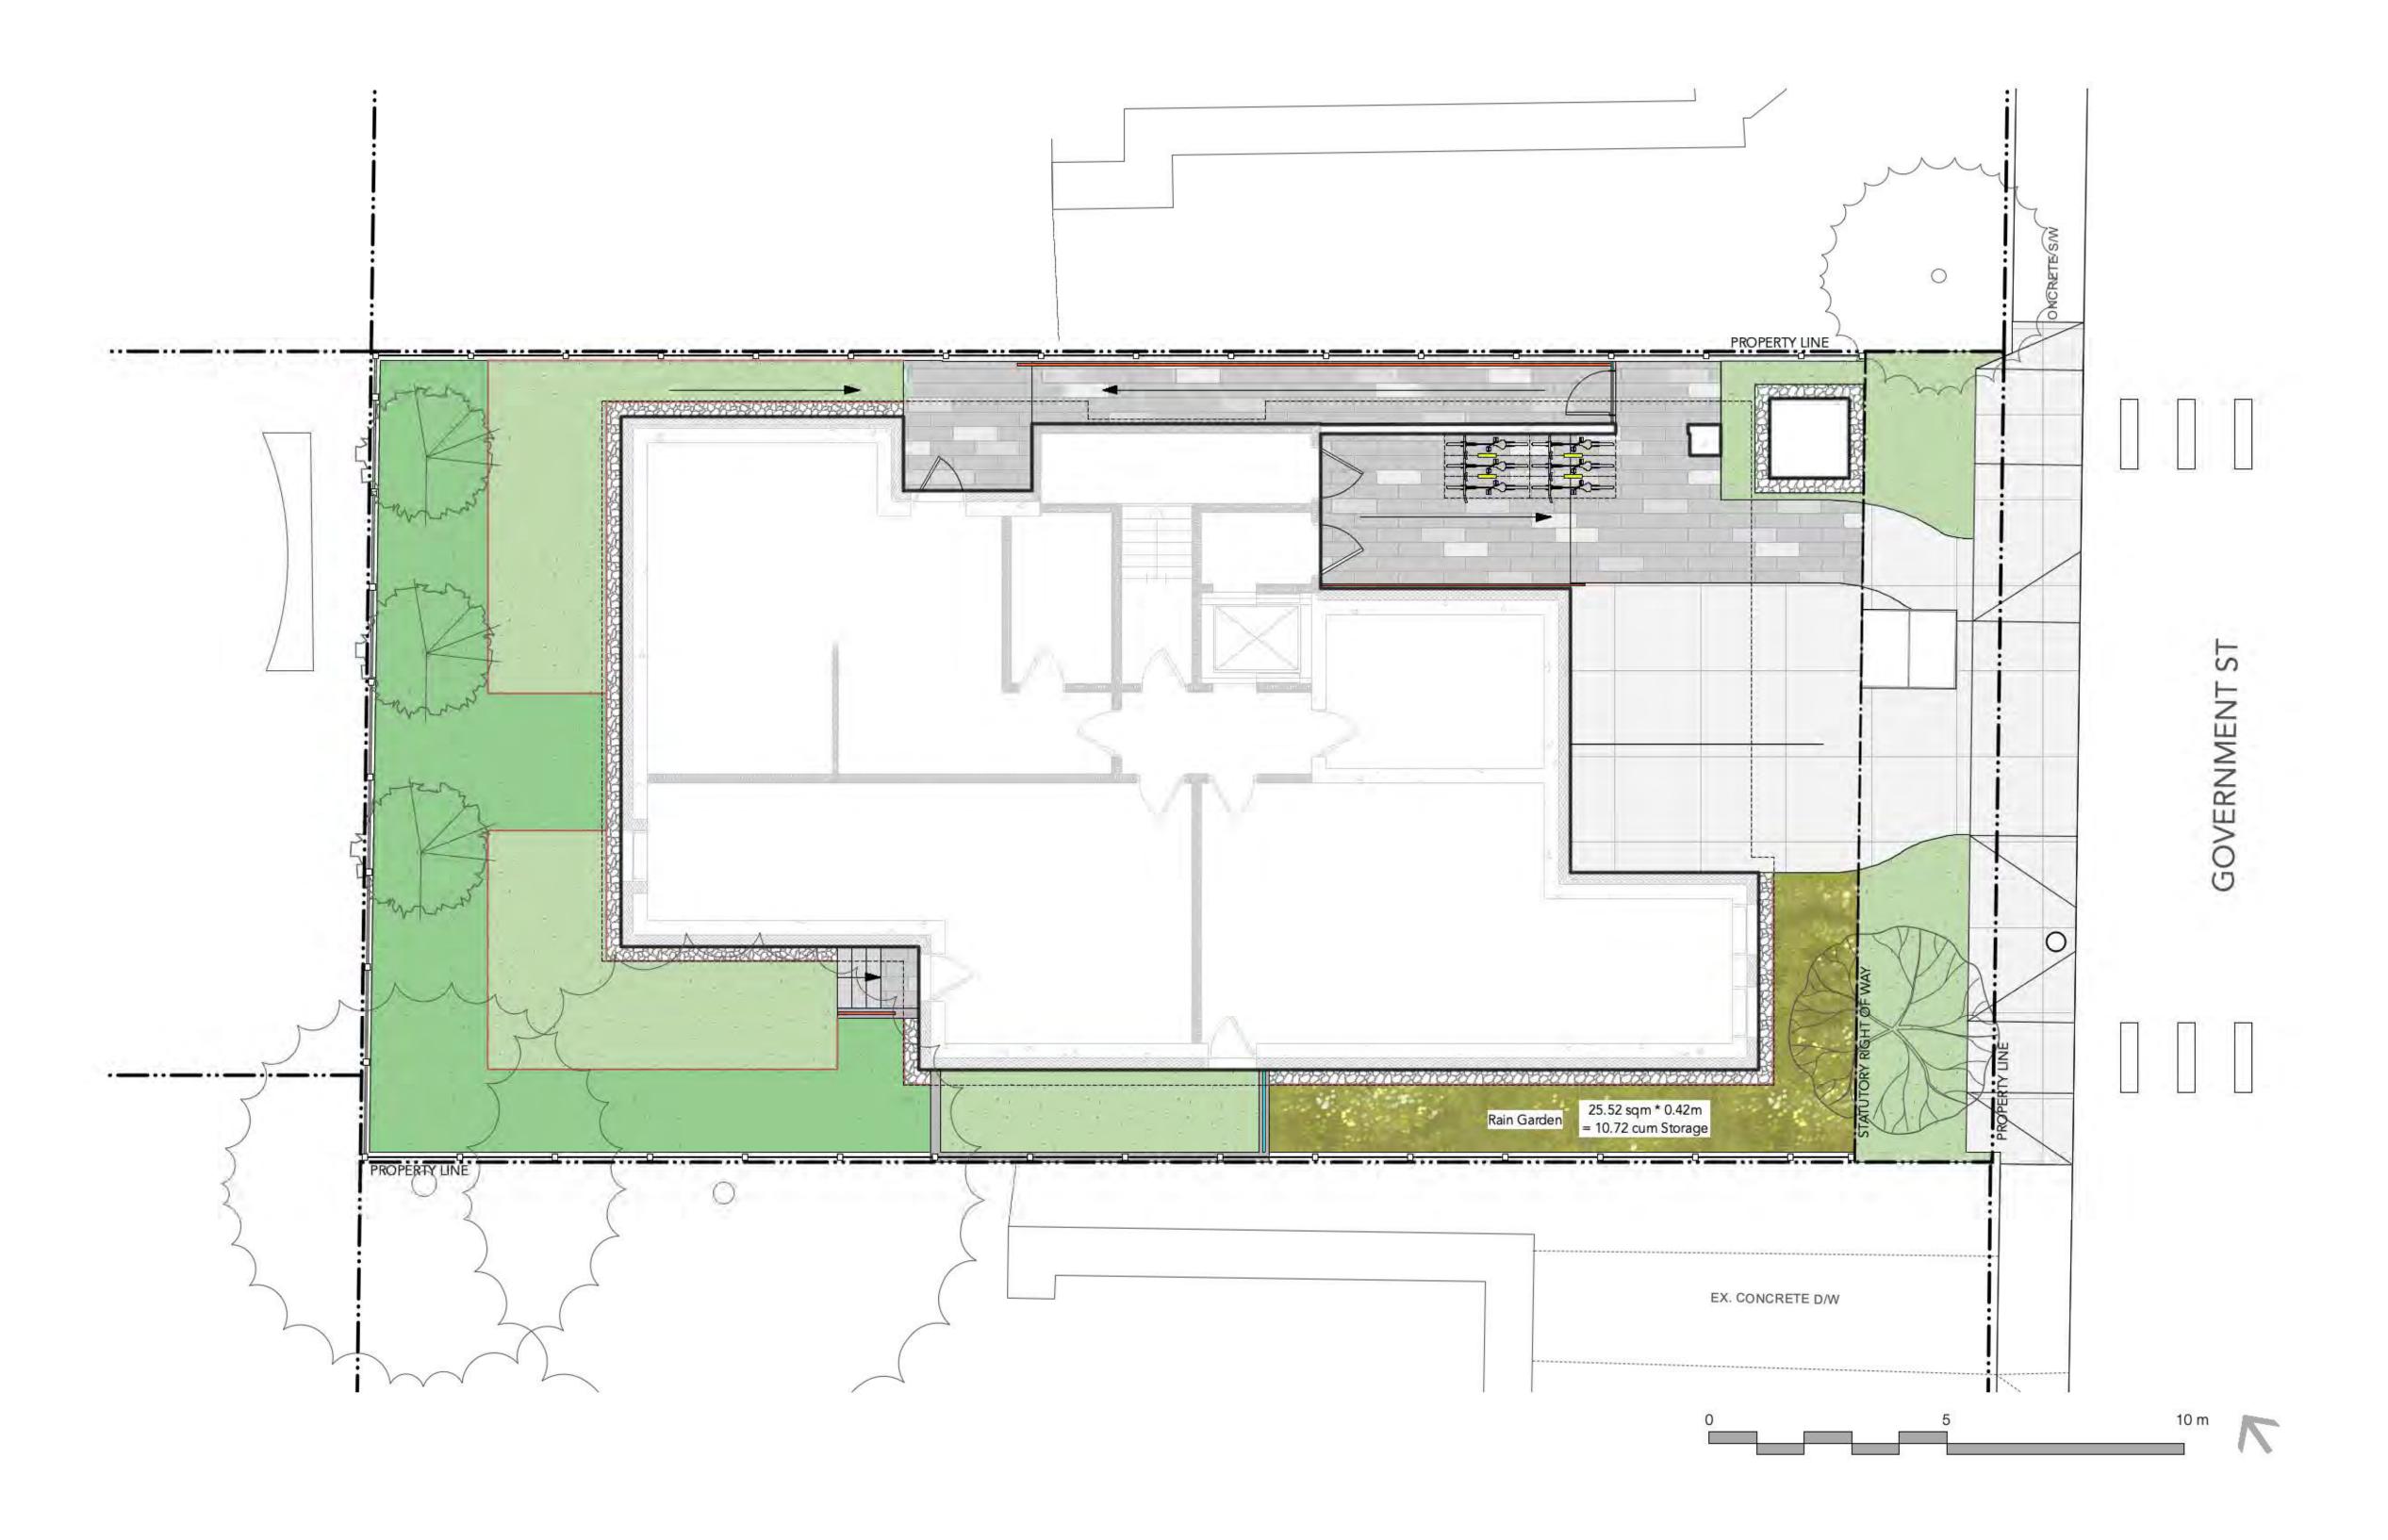





Reissued for Rezoning

Reissued for Rezoning (Draft) 2025-04-0 Rain Garden Review



50 Government St Concept Design 50 Government Street, Victoria, BC


2340

LAYOUT + MATERIALS PLAN - LEVEL 1


GENERAL PLANTING NOTES:

- 1. ALL PLANTING SHALL BE IN ACCORDANCE WITH BC LANDSCAPE STANDARD, LATEST EDITION
- 2. ALL TREE AND SHRUB AREAS TO BE MULCHED WITH 50MM (2") OF MEDIUM FINE MULCH, LESS THAN 50MM (2") DIAMETER.
- 3. ROOTZONE TO REST ON TAMPED SOIL
- 4. SHRUBS: PREPARE PLANTING HOLES AS SPECIFIED. PLANT AT THE SAME GRADE AS NURSERY. WATER AND FERTILIZE AS SPECIFIED. ENSURE POSITIVE DRAINAGE THROUGHOUT PLANTING BED
- 5. TREE SIZE AND SPACING TO BE AS PER CITY OF VANCOUVER ARBORIST
- 6. TREE: PREPARE PLANTING HOLES AS SPECIFIED INSTALL TOP OF ROOTZONE 6" ABOVE FINISHED GRADE OF GROWING MEDIUM. WATER AND FERTILIZE AS SPECIFIED BY NURSERY.
- 7. FINAL SOFTSCAPE AND GRADING LAYOUTS AS WELL AS LOCATION SPACING TO BE APPROVED BY LANDSCAPE ARCHITECTS IN THE FIELD PRIOR TO INSTALLATION
- 8. IN CASE OF A DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL
- 9. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD
- 10. INSTALL TREE PROTECTION FENCING AROUND ALL EXISTING TREES TO CITY OF VANCOUVER STANDARDS. INSTALL TREE PROTECTION FENCING ON NEW PLANTING IF PHASED INSTALLATION IS REQUIRED.
- 11. FINAL PLANT SPACING, QUANTITY AND TREE PLACEMENT HAS BEEN REVIEWED TO THE SATISFACTION OF GENERAL MANAGER OF ENGINEERING SERVICES

| | | | | New Trees Proposed Medium | Soil Volume Required | |
|------------------|-----------|-------------------|-----------------------|---------------------------------|-----------------------|------------|
| | Area (m²) | Soil Depth (m) | Estimated soil volume | | Medium (m³ / tree) | Total (m³) |
| Planting Area | 50 | 0.9 | 45 | 3 | 15 | 45 |

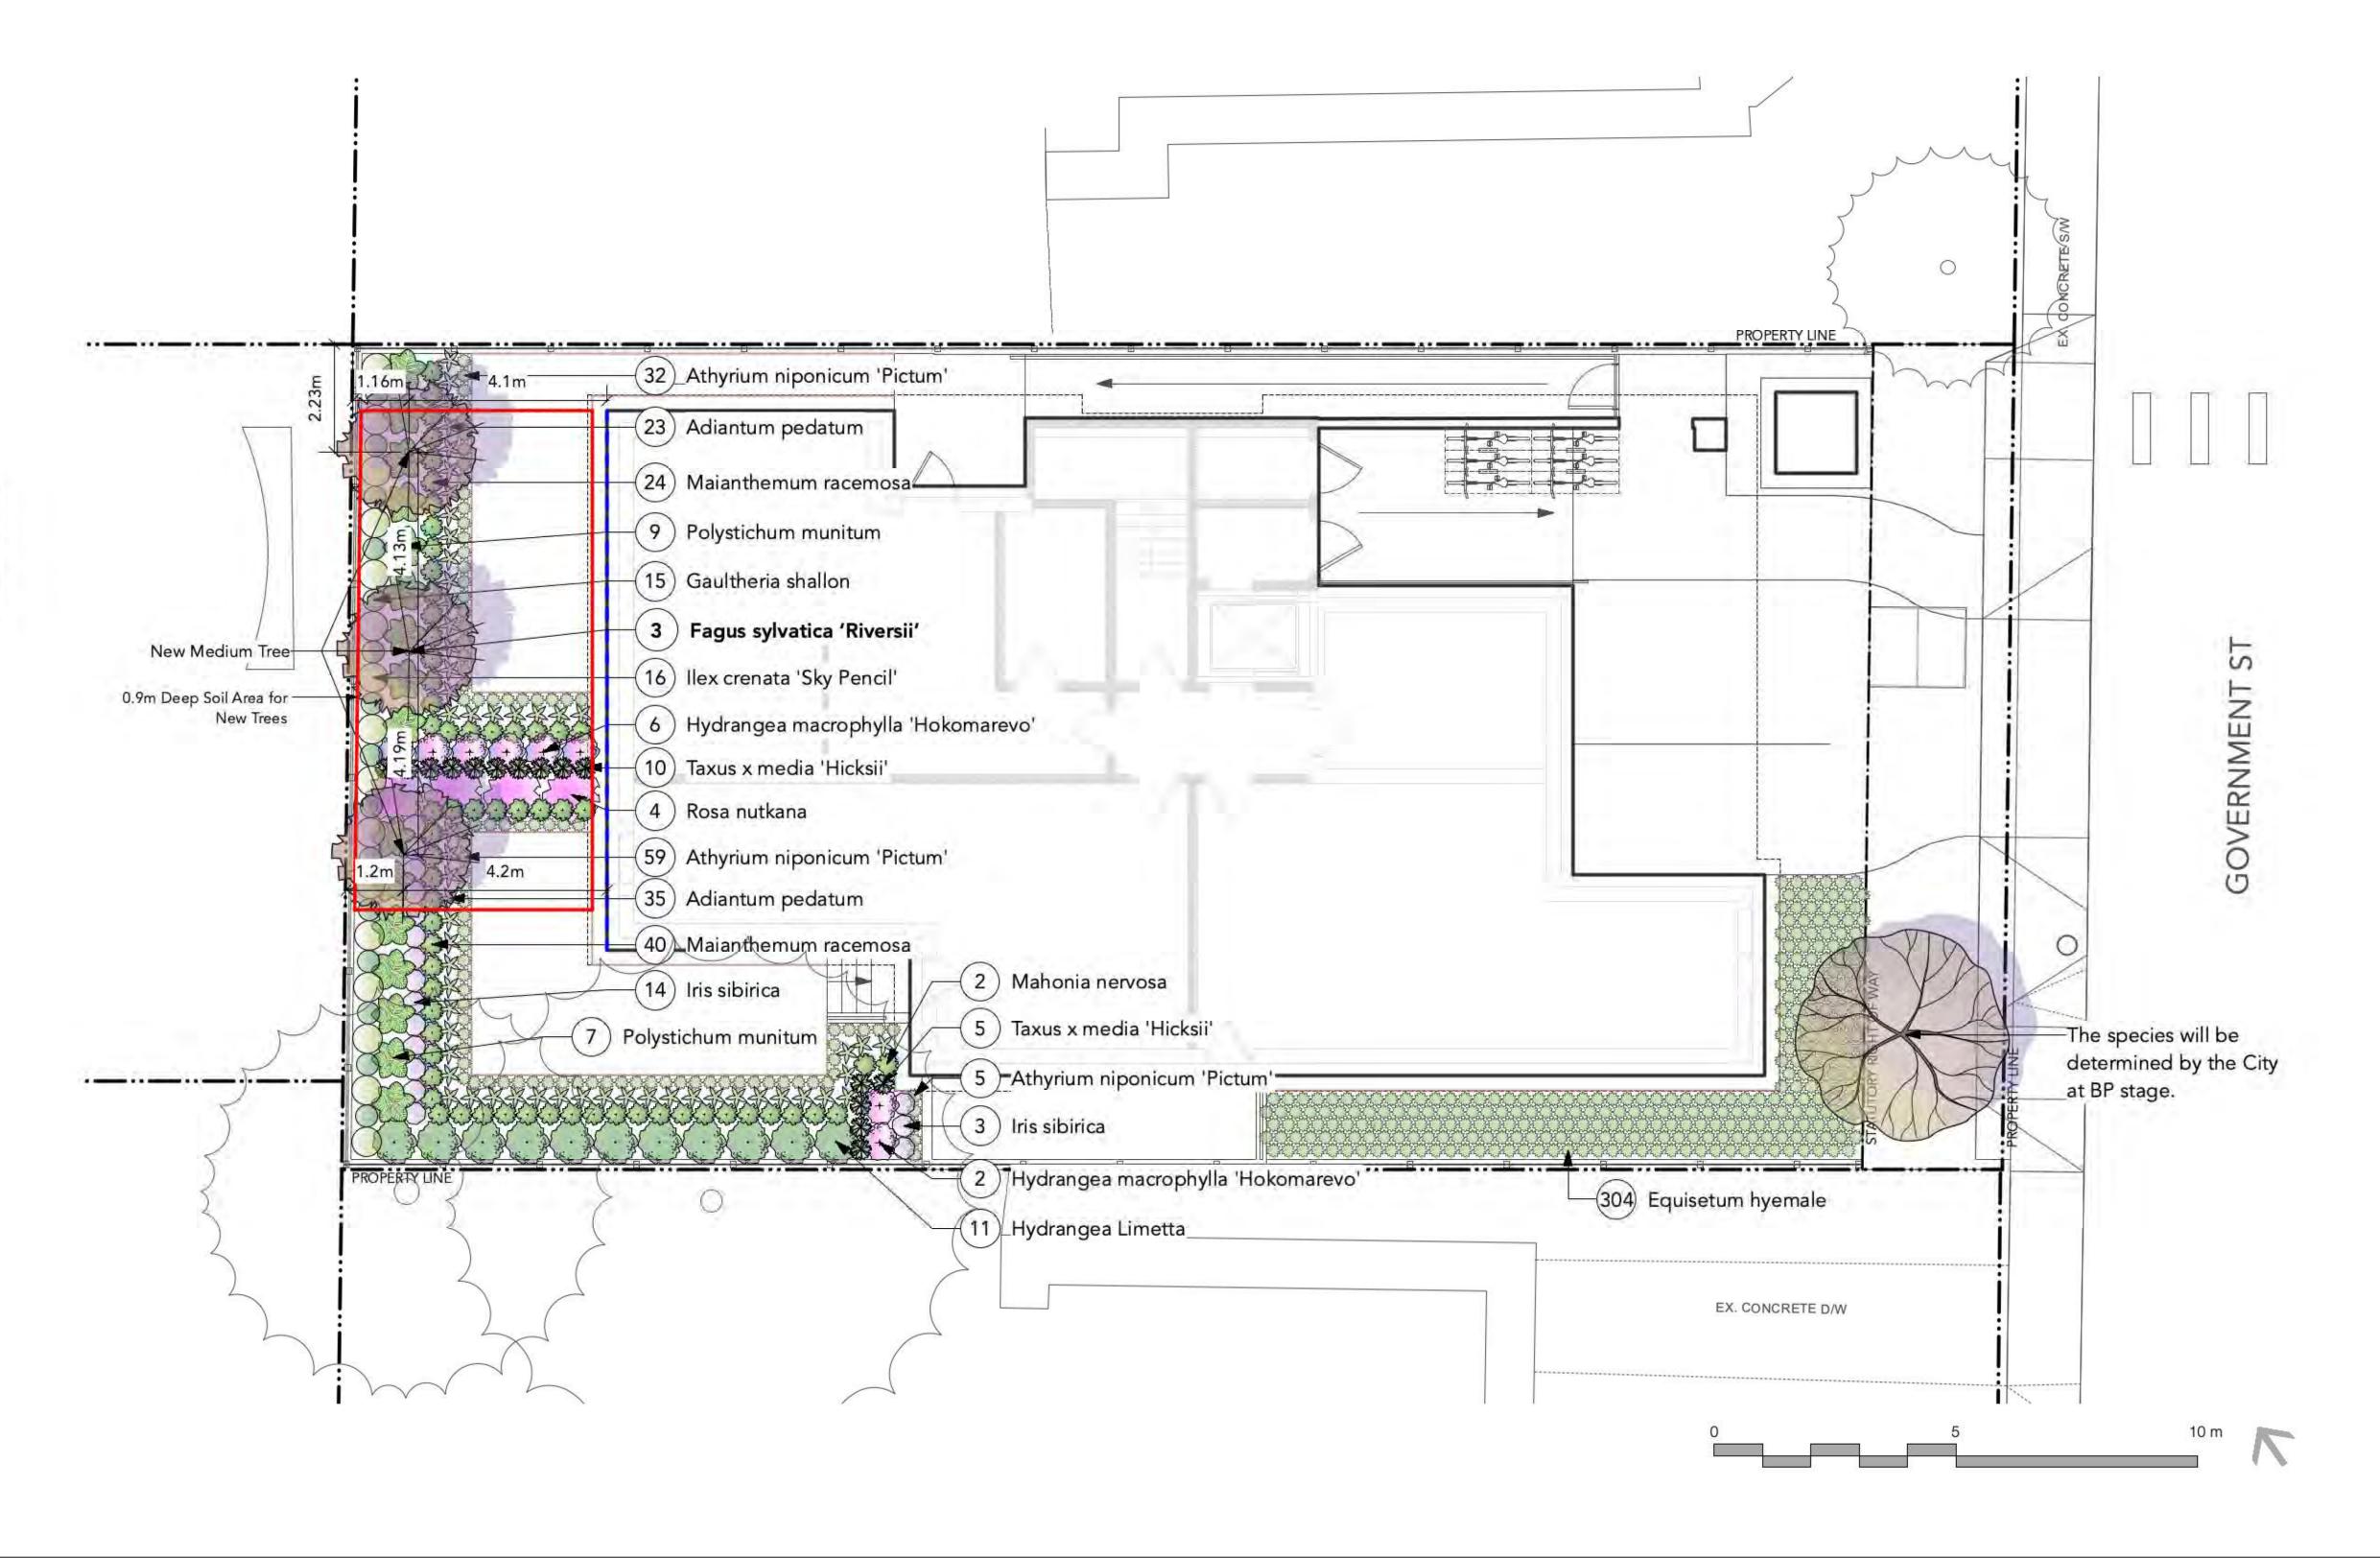





Rain Garden Review

Reissued for Rezoning (Draft) 2025-04-02

50 Government St Concept Design 50 Government Street, Victoria, BC

2340


PLANTING PLAN - LEVEL 1

GENERAL GRADING NOTES:


- ALL UTILITIES TO BE STAKED OUT BY CONTRACTOR AND PROTECTED FOR DURATION OF CONSTRUCTION PERIOD.
- UNLESS OTHERWISE NOTED, PROVIDE A MINIMUM 2% SLOPE ON ALL HARD AND SOFT LANDSCAPE AREAS TO ENSURE POSITIVE DRAINAGE AWAY FROM BUILDINGS OR TO DRAINAGE STRUCTURES. MAXIMUM 3:1 SLOPE IN SOFT LANDSCAPE AREAS.
- THE LAYOUT OF ALL PROPOSED HARDSCAPE ITEMS, SITE FURNITURE, LIGHTING, PLANTING BEDS AND OTHER MATERIALS IS TO BE STAKED OUT BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- ALL SUBSTITUTIONS OF SPECIFIED MATERIALS TO BE APPROVED BY LANDSCAPE ARCHITECT.
- REFER TO CIVIL FOR EXCAVATION DEPTHS, BACKFILL, AND BASE MATERIAL FOR ALL LANDSCAPE ITEMS SHOWN ON PLAN.
- SLOPE SHALL MATCH EXISTING GRADE ALONG ALL PROPERTY LINES.
- 7. REFER TO CIVIL ENGINEER'S PRECISE GRADING PLANS FOR SITE GRADING PLANS FOR SITE GRADING, DRAINAGE, AND UTILITY LOCATIONS. IF ACTUAL SITE CONDITIONS VARY FROM WHAT IS SHOWN ON THE LANDSCAPE ARCHITECT'S PLANS, THE CONTRACTOR SHALL CONTACT THE OWNER'S REPRESENTATIVE AND LANDSCAPE ARCHITECT FOR DIRECTION AS TO HOW TO PROCEED.
- 8. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE ACTUAL LOCATION AND ELEVATION IN THE FIELD PRIOR TO BEGINNING CONSTRUCTION. THE CONTRACTOR SHALL PROTECT ALL EXISTING UTILITIES AND SHALL BE RESPONSIBLE FOR ANY DAMAGE TO EXISTING UTILITIES ENCOUNTERED DURING CONSTRUCTION.
- ALL PROPOSED GRADES ARE TO MEET AND BLEND IN WITH EXISTING GRADING AT PROJECT LIMITS, GRADING LIMITS, AND EXISTING SIDEWALK. PRECISE ELEVATIONS INDICATED ON PLANS TO BE VERIFIED IN FIELD TO AS-BUILT CONDITION.
- 10. THE DEBRIS CREATED BY LANDSCAPE GRADING OPERATIONS SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE DISPOSED OF LEGALLY OFF SITE.
- 11. FINAL GRADING SHALL BE REVIEWED BY THE LANDSCAPE ARCHITECT IN THE FIELD PRIOR TO INSTALLATION OF PLANTING.

GRADING LEGEND

| SYMBOL | DESCRIPTION |
|----------|----------------------------|
| EL 0.00 | PROPOSED ELEVATION |
| FFE 0.00 | FINISHED FLOOR ELEVATION |
| TW 0.00 | TOP OF WALL ELEVATION |
| BW 0.00 | BOTTOM OF WALL ELEVATION |
| TS 0.00 | TOP OF STAIRS ELEVATION |
| BS 0.00 | BOTTOM OF STAIRS ELEVATION |

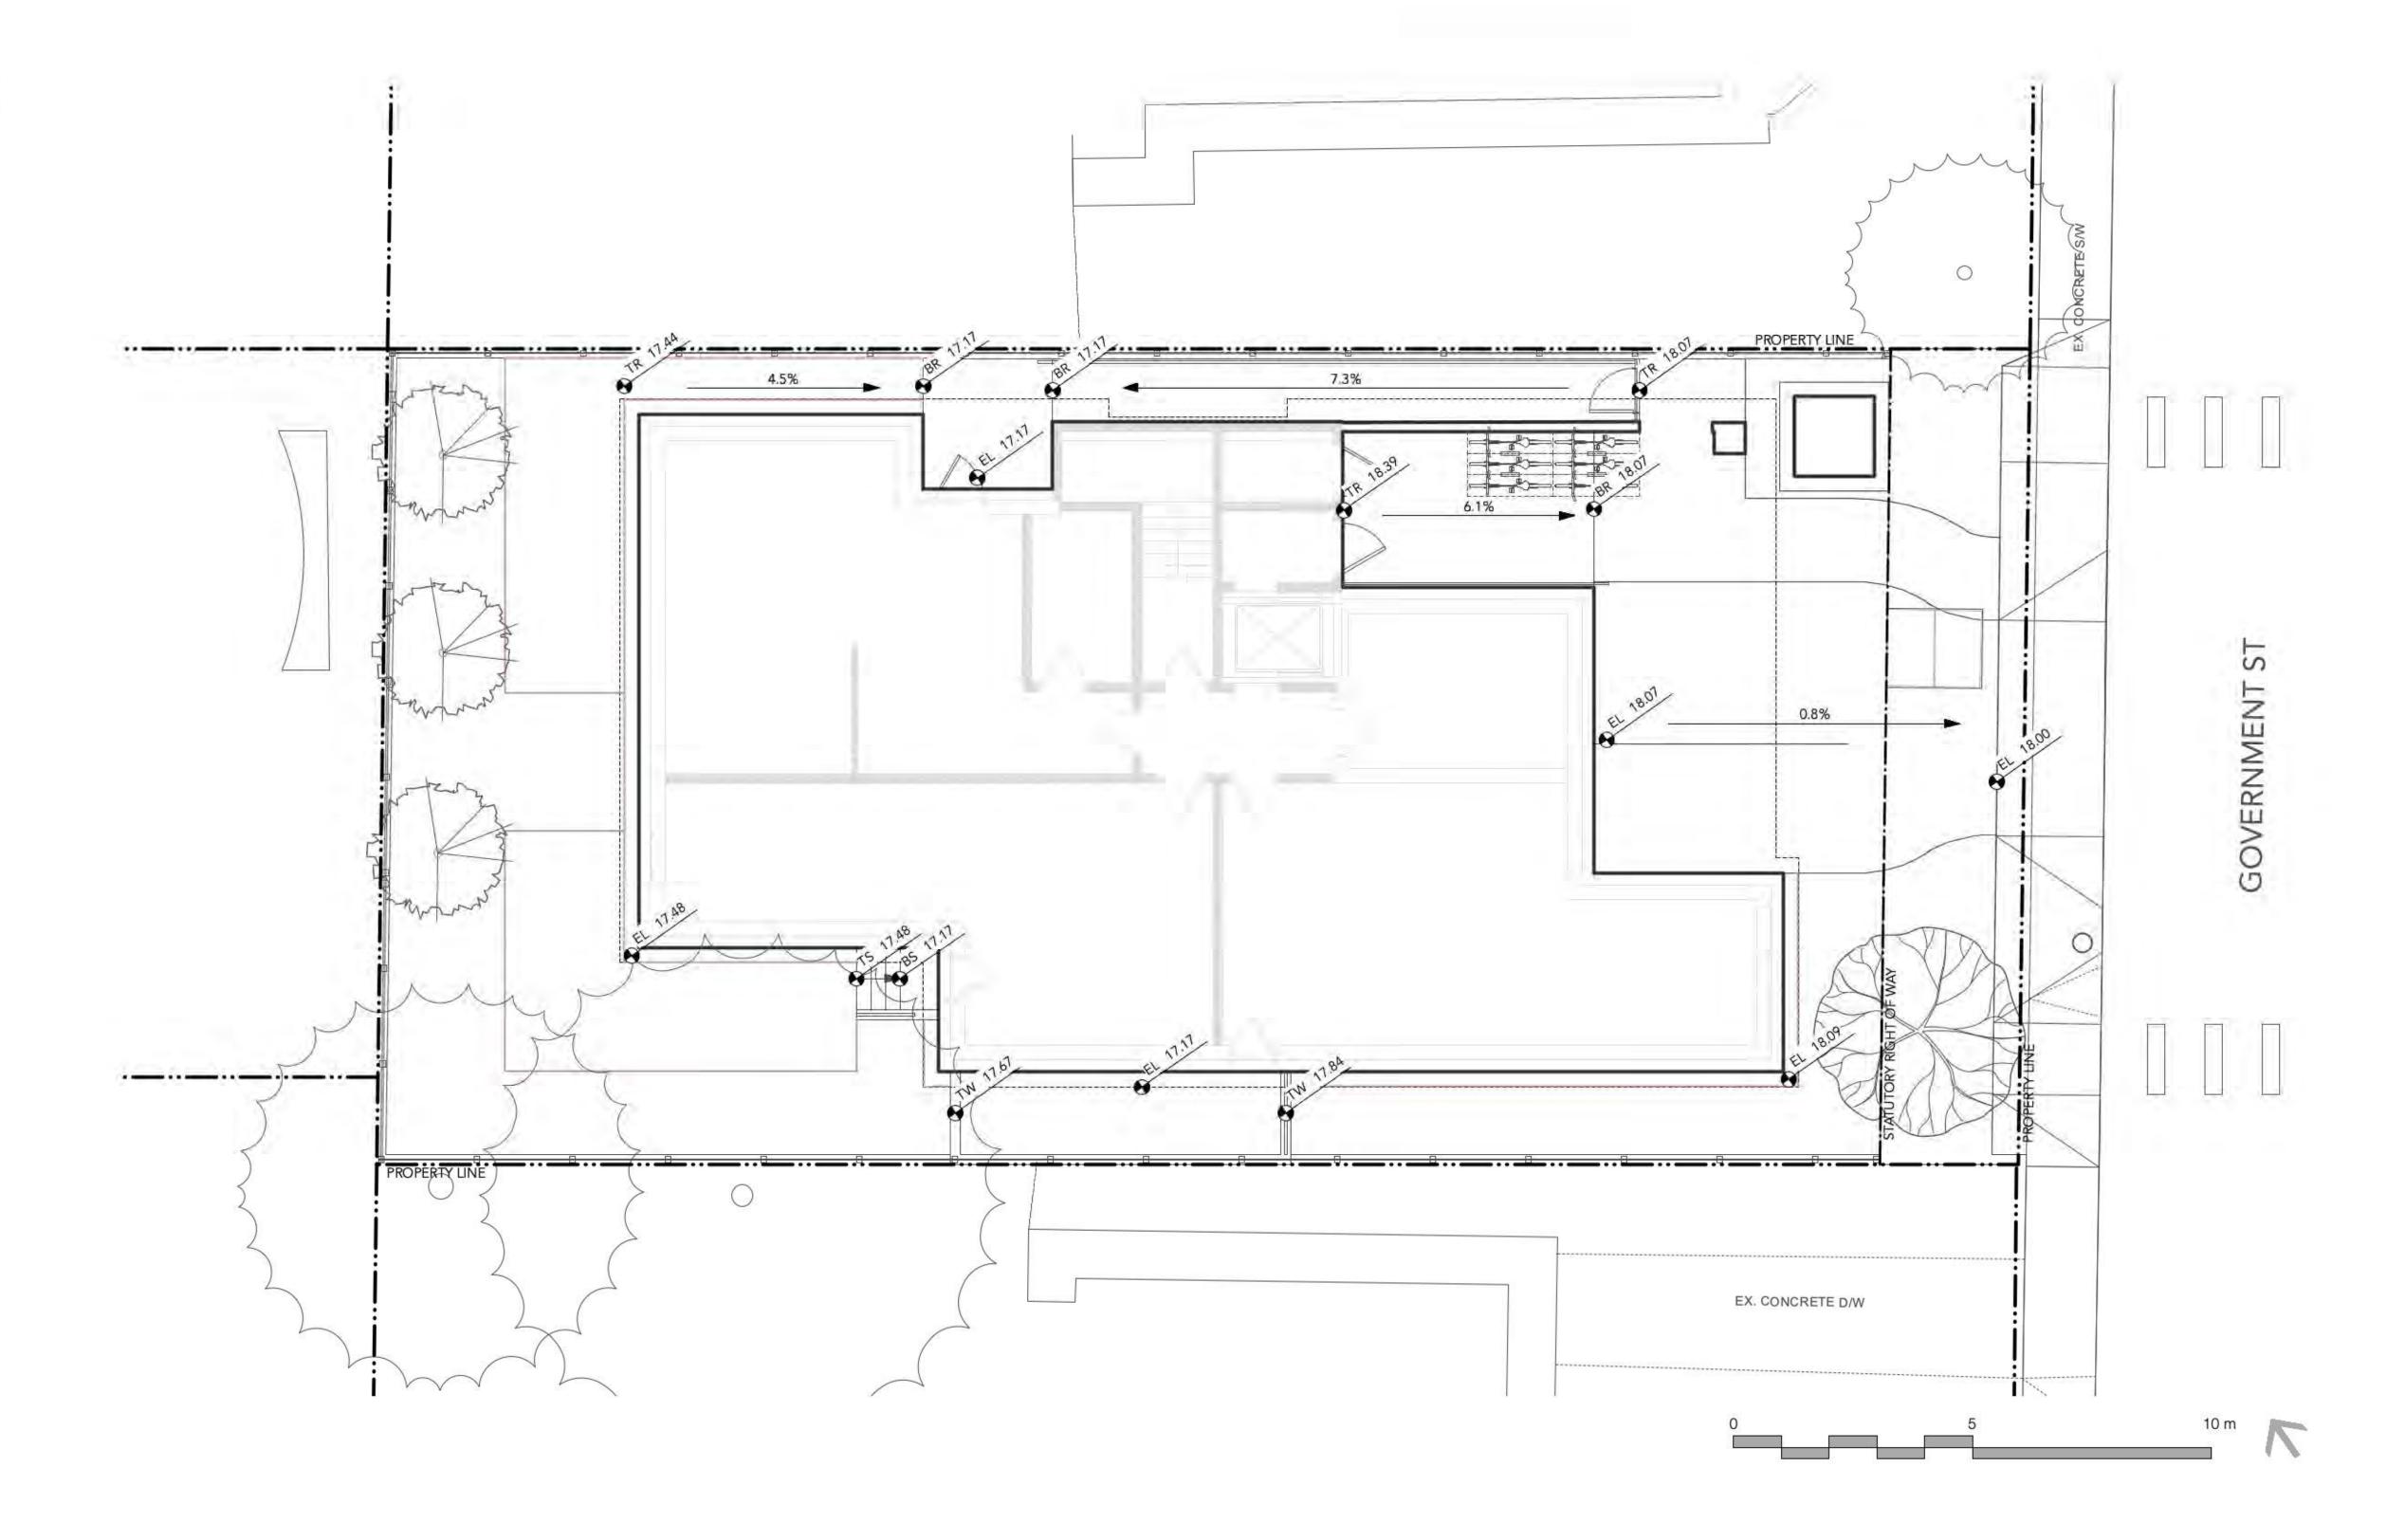





L Reissued for Rezoning 2025-04-0

Reissued for Rezoning (Draft) 2025-04-0

Reissued for Rezoning (Draft Rain Garden Review



50 Government St Concept Design 50 Government Street, Victoria, BC L1.2 GRADING PLAN - LEVEL 1

UTILITY LEGEND

SYMBOL


DESCRIPTION



EXISTING UTILITIES See Civil Drawings for Details





PROPOSED UTILITIES See Civil Drawings for Details

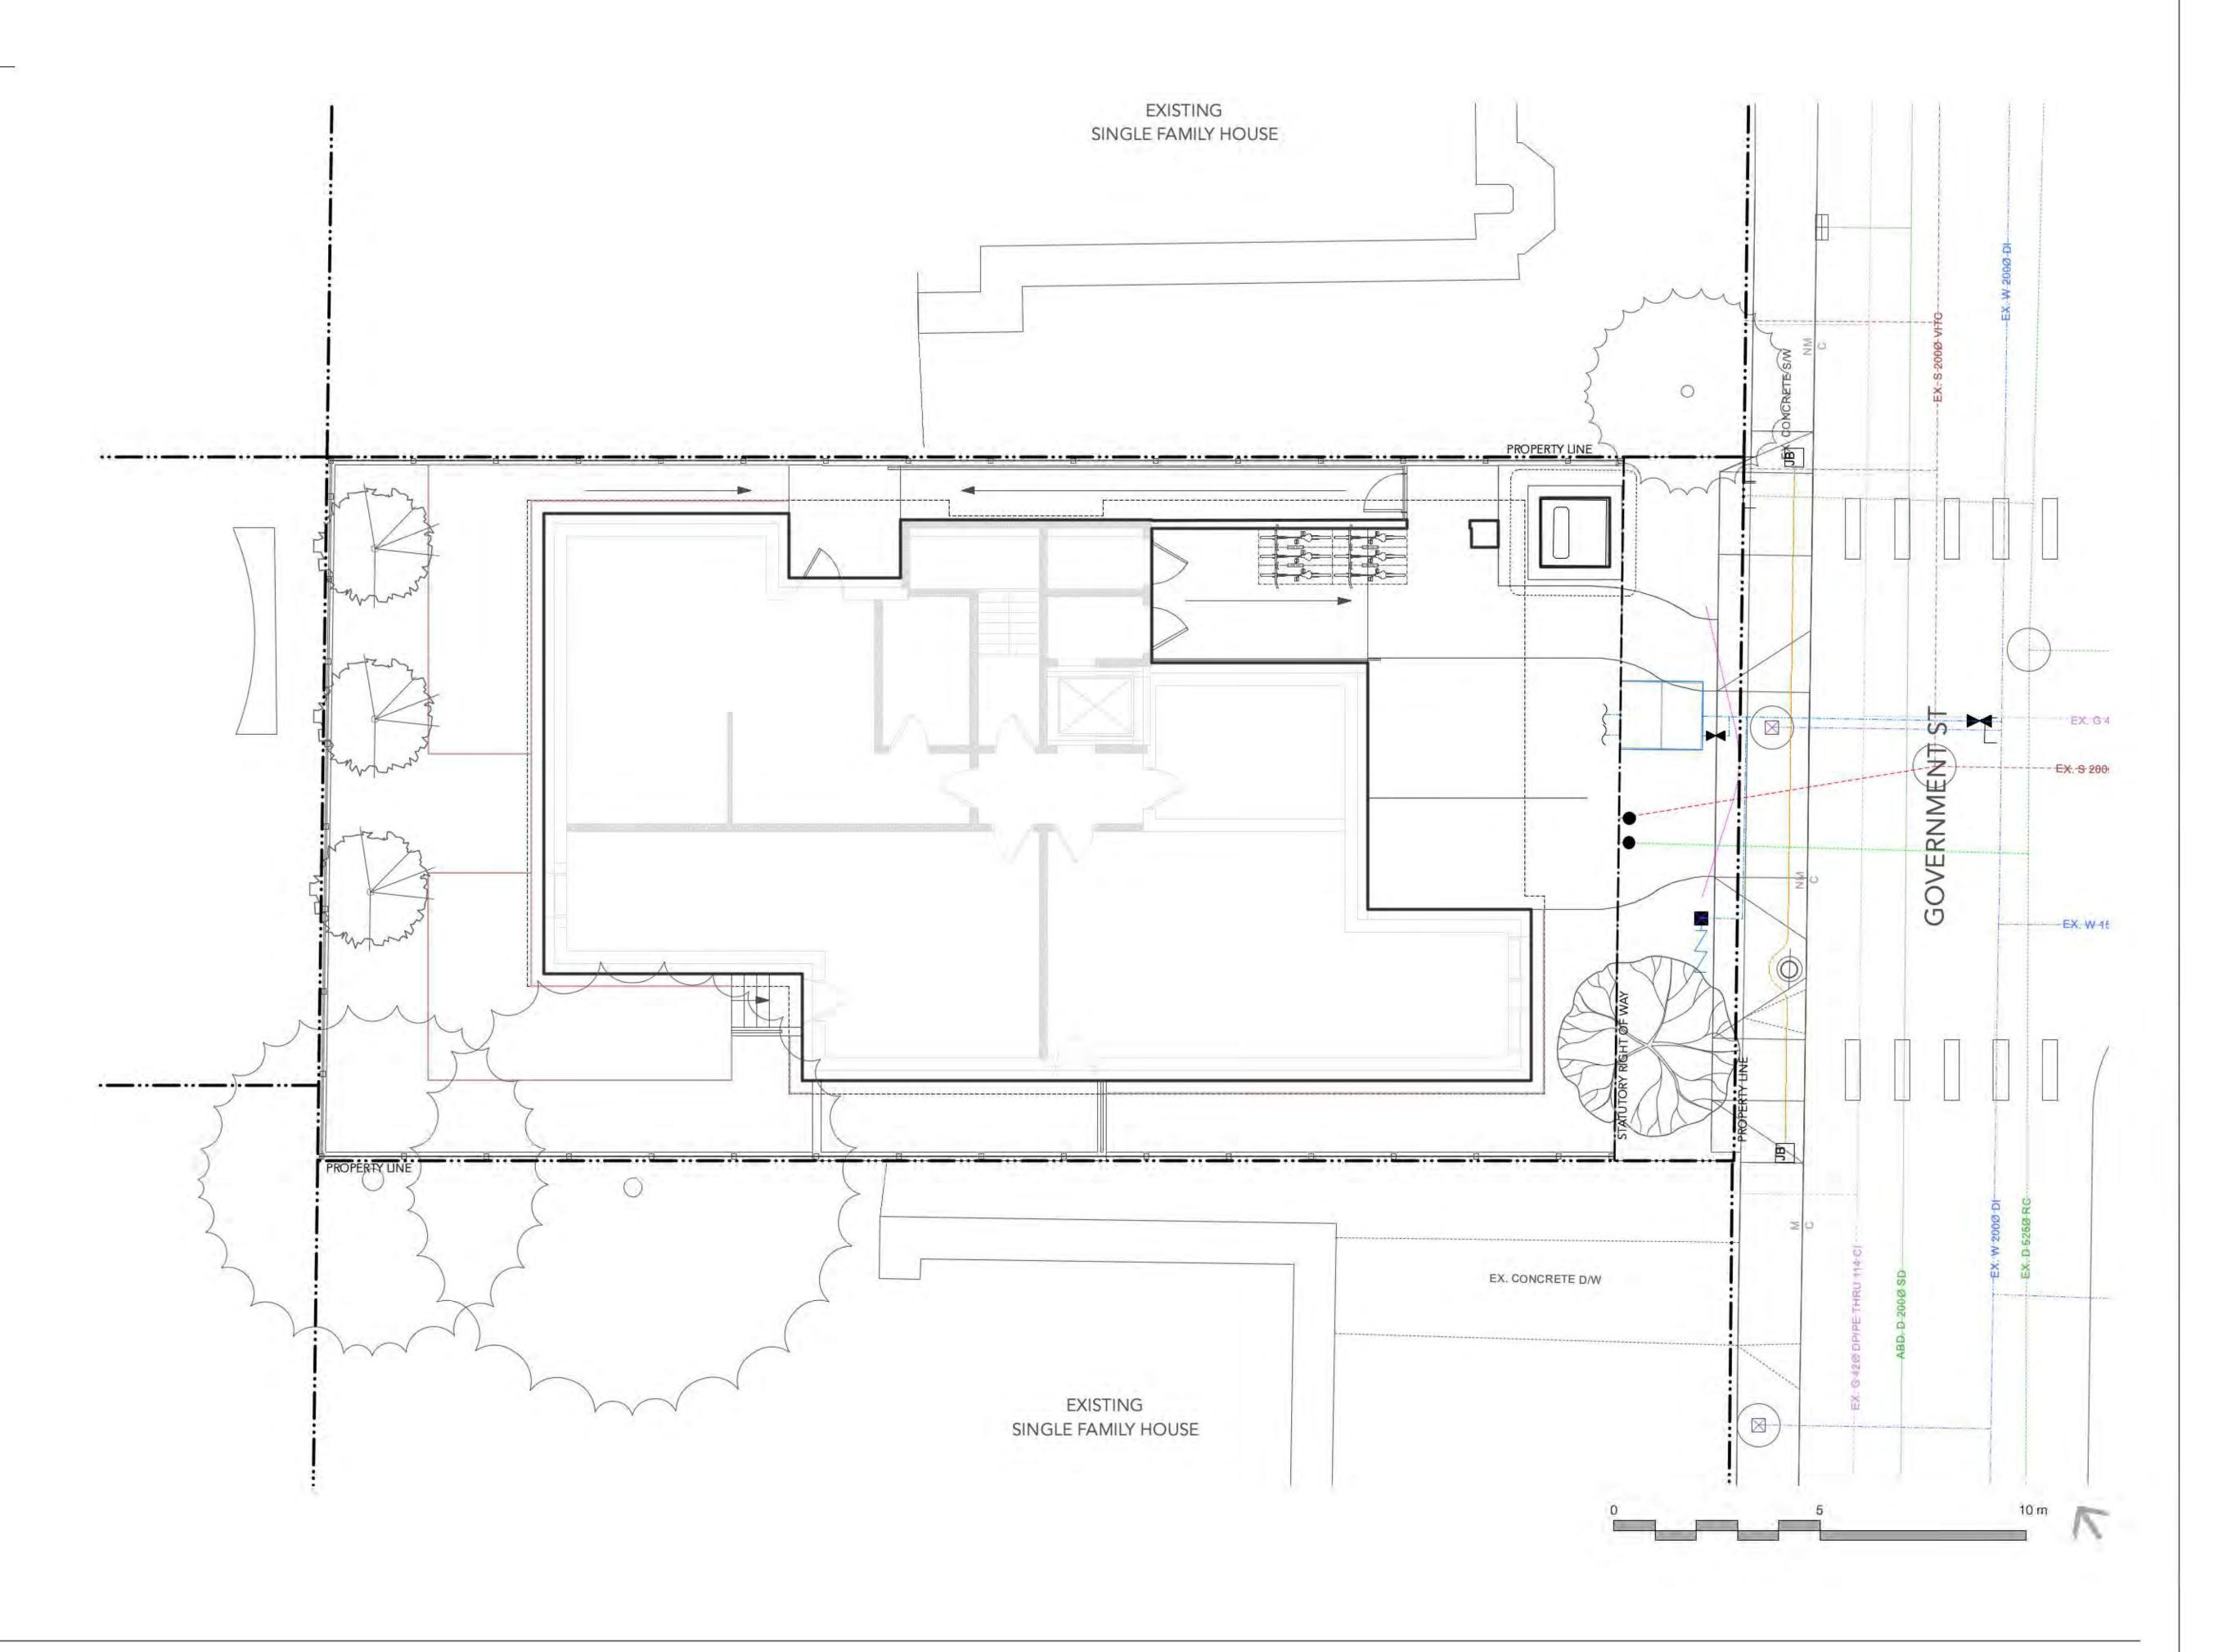











50 Government St Concept Design 50 Government Street, Victoria, BC

2340

UTILITY PLAN - LEVEL 1


STORMWATER MANGEMENT LEGEND

SYMBOL

DESCRIPTION

PERMEABLE AREA Total: 264.6 sqm

IMPERVIOUS AREA Total: 66.4 sqm

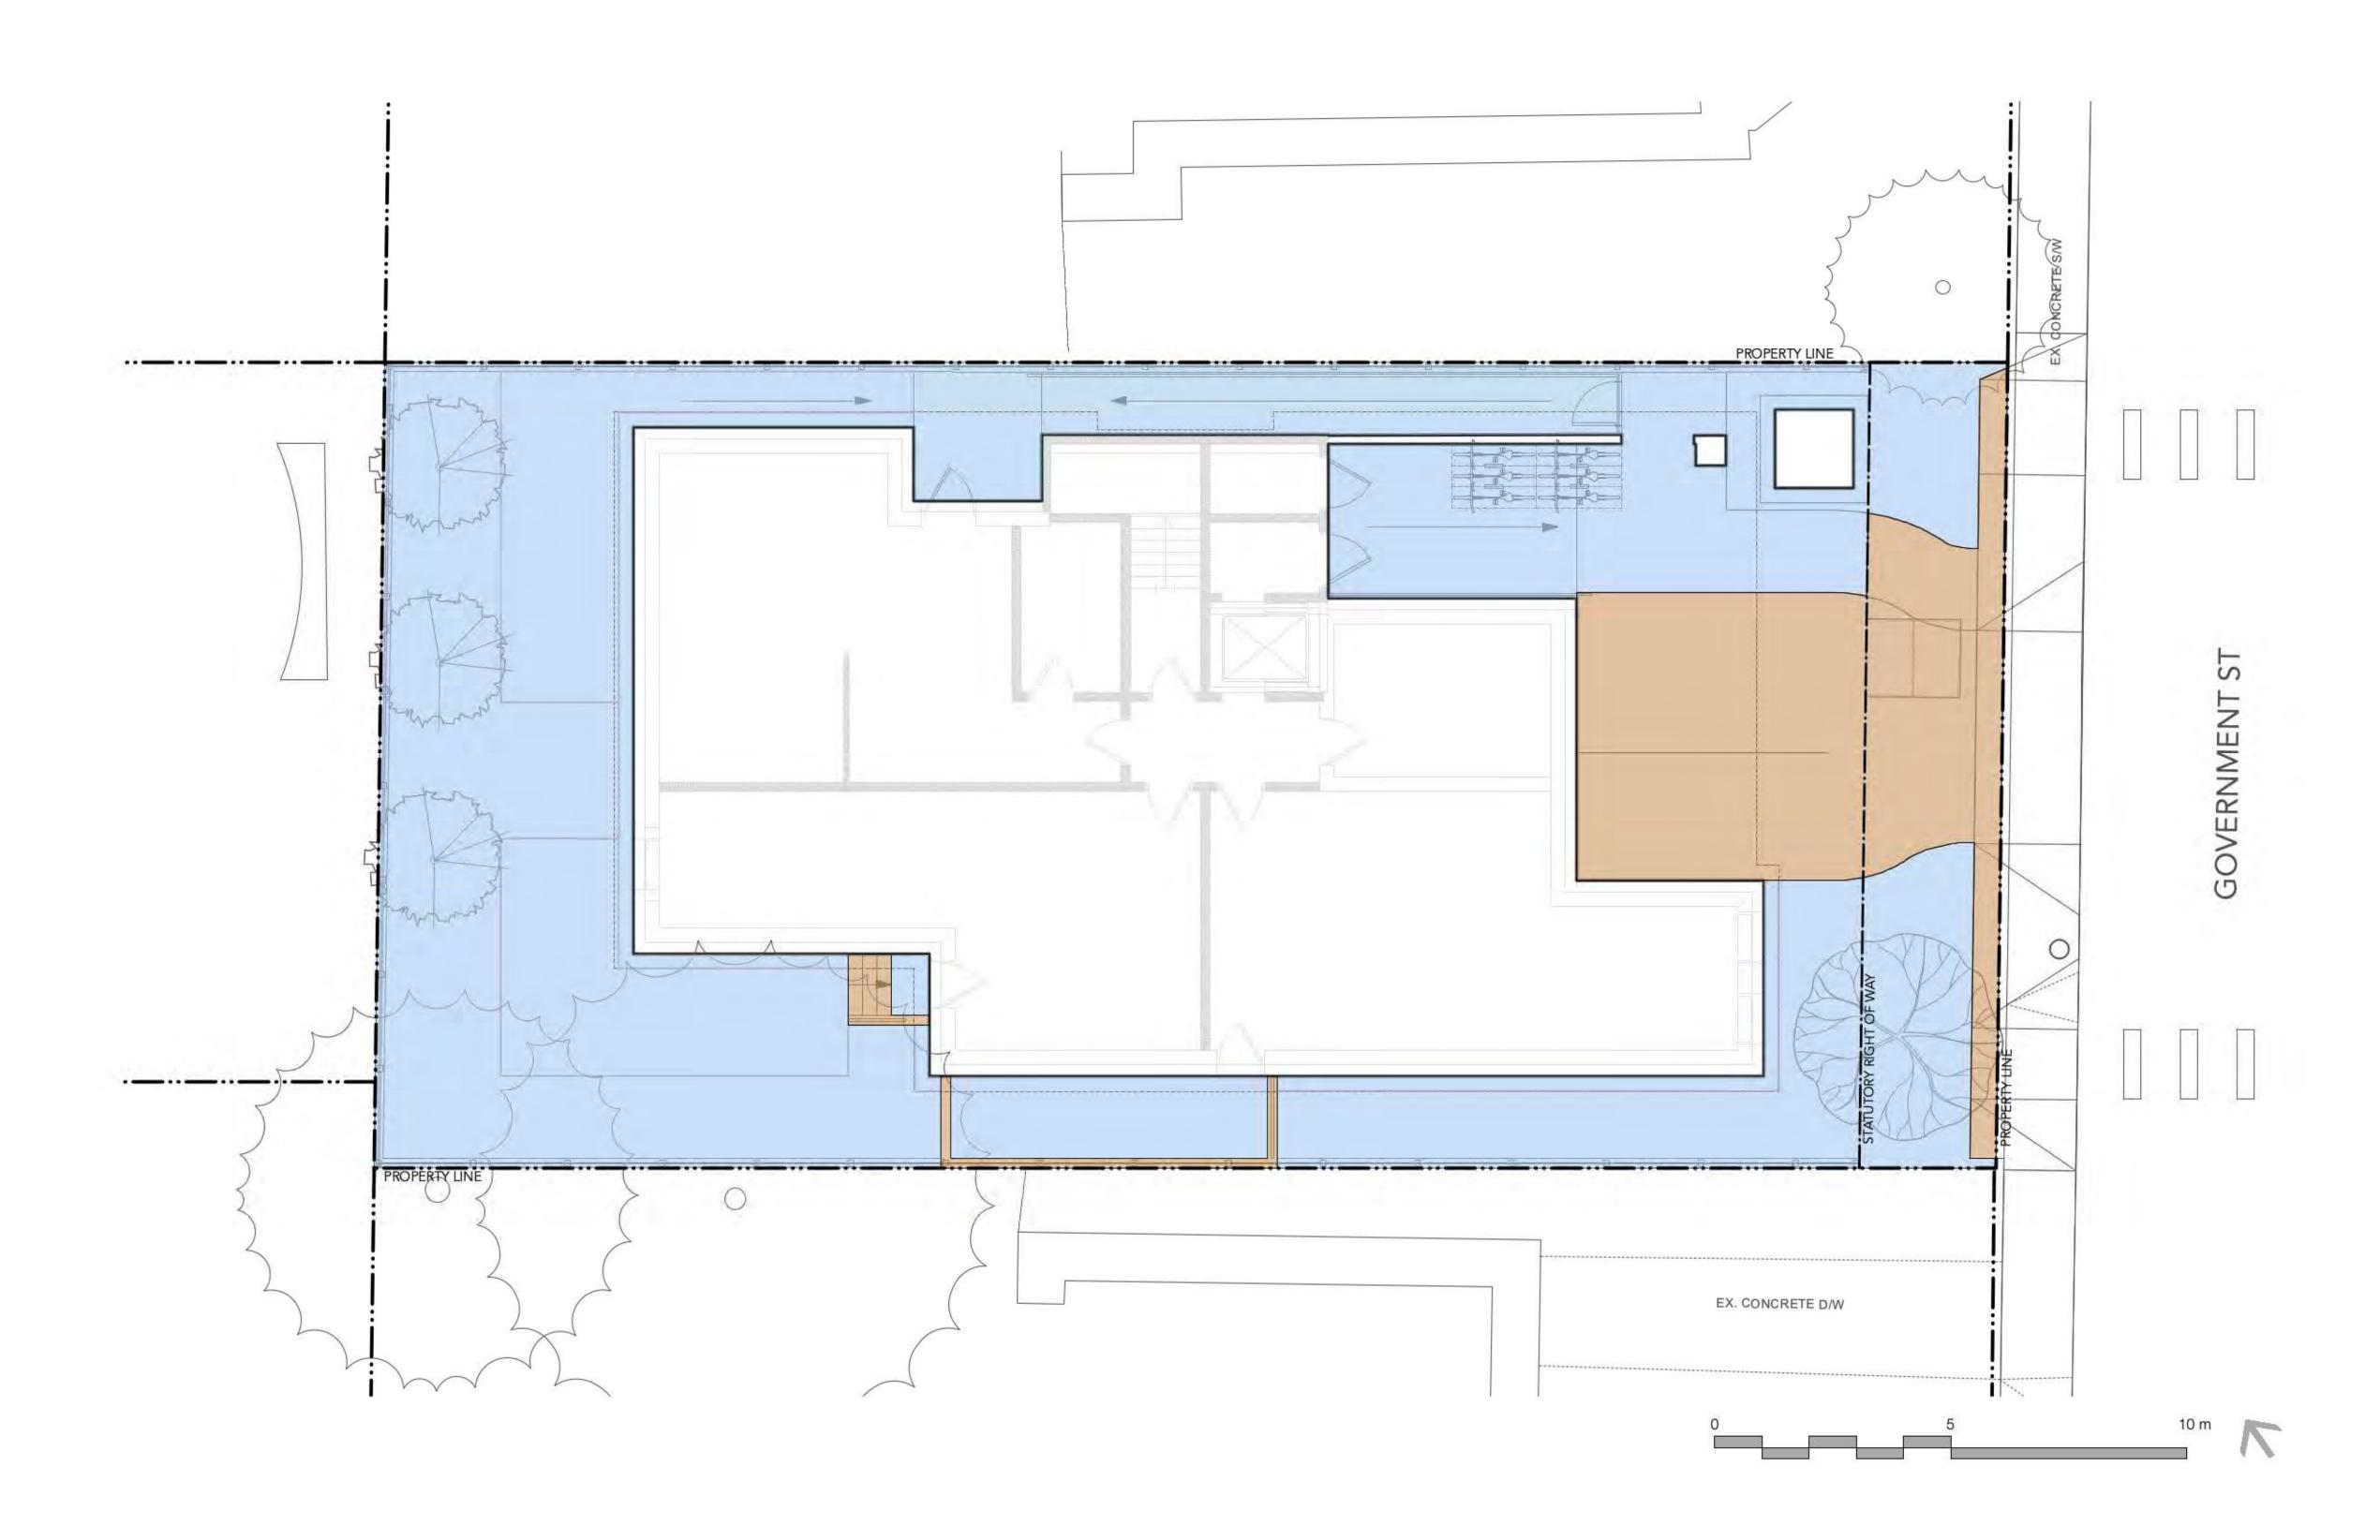



L Reissued for Rezoning 2025-04-03
K Reissued for Rezoning (Draft) 2025-04-02

J Rain Garden Review

Oraft) 2025-04-02 2025-03-25

50 Government St Concept Design 50 Government Street, Victoria, BC

234

L1.4

STORMWATER MANGEMENT PLAN - LEVEL

OVERALL PLANT LIST

| | e di mi | | 1.00 | Acres Const | 6 1 1 1 1 6 | | AVS. |
|-------|----------|-----------|------------------------------------|----------------------------------|----------------|-----------|-------|
| | ymbol | | Latin Name | Common Name | Scheduled Size | Spacing | Notes |
| | ECIDUOU | S IKEES: | | | | | |
| •• | | 3 | Fagus sylvatica 'Riversii' | European Beech | #1 Pot | As Shown | |
| S | HRUBS: | | | | | | |
| • • | 0 | 15 | Gaultheria shallon | Salal | #1 Pot | 1'6" o.c. | |
| | | 11 | Hydrangea Limetta | Limetta Hydrangea | #3 Pot | 3'0" o.c. | |
| | | 8 | Hydrangea macrophylla 'Hokomarevo' | Everlasting Revolution Hydrangea | #3 Pot | 2'6" o.c. | |
| | | 16 | llex crenata 'Sky Pencil' | Japanese Holly | #2 Pot | 2'0" o.c. | |
| | | 2 | Mahonia nervosa | Longleaf Mahonia | #2 Pot | 1'6" o.c. | |
| • • | 0 | 64 | Maianthemum racemosa | False Solomon's Seal | #1 Pot | 1'6" o.c. | |
| • • • | \$, , } | 4 | Rosa nutkana | Nootka Rose | #5 Pot | 4'0" o.c. | |
| • | | 15 | Taxus x media 'Hicksii' | Hick's Yew | 1.25m. ht. | 1'6" o.c. | |
| P | ERENNIAL | S, GRASSE | ES, GROUNDCOVER: | | | | |
| • | 於 | 58 | Adiantum pedatum | American Maidenhair Fern | #2 Pot | 3'0" o.c. | |
| | 0 | 96 | Athyrium niponicum 'Pictum' | Japanese Painted Fern | #1 pot | 3'0" o.c. | |
| • | 0 | 304 | Equisetum hyemale | Scouring Rush Horsetail | #2 Pot | 1'0" o.c. | |
| | 0 | 17 | Iris sibirica | Siberian Iris | #1 Pot | 3'0" o.c. | |
| • • | | 16 | Polystichum munitum | Western sword fern | #3 Pot | 6'0" o.c. | |
| | | | | | | | |

- 1. ALL PLANT MATERIAL AND LANDSCAPING PRACTICES SHALL BE COMPLIANT WITH THE LATEST EDITION OF THE BCLNA NURSERY STANDARD.
- 2. IN CASE OF DISCREPANCY BETWEEN PLANT INFORMATION ON THE LIST AND ON THE PLAN, THE LATTER SHALL PREVAIL.
- 4. ALL PLANT MATERIAL TO BE MANUALLY WATERED FROM START OF INSTALLATION THROUGH THE END OF THE WARRANTY PERIOD.
- 6. FINAL LOCATION, QUANTITY, TREE SPECIES TO THE SATISFACTION OF THE GENERAL MANAGER OF ENGINEERING.
- 7. NEW TREE MUST BE OF GOOD STANDARD, MINIMUM 6 CM CALLIPER AND INSTALLED WITH APPROVED ROOT BARRIERS, TREE GUARDS AND APPROPRIATE SOIL.
- 8. ROOT BARRIERS SHALL BE 8'-0" (2.4M) LONG AND 18" (0.46M) DEEP. PLANTING DEPTH OF ROOT BALL MUST BE BELOW SIDEWALK GRADE. NEW STREET TREES TO BE CONFIRMED PRIOR TO ISSUANCE OF THE BUILDING PERMIT.
- Food-bearing plant
- Plant for nesting
- BC native plant

PLANT IMAGES

TREES



Fagus sylvatica 'Riversii'

European Beech

SHRUBS





Limetta Hydrangea



Hydrangea macrophylla 'Hokomarevo' Everlasting Revolution Hydrangea





Mahonia Nervosa Compact Oregon Grape



Maianthemum racemosa False Solomon's seal



Rosa nutkatana Nootka Rose



Taxus x media 'Hicksii' Hick's Yew

GRASSES, FERNS, PERENNIALS



Adiantum pedatum Maidenhair Fern



Athyrium nipponicum 'Pictum' Japanese Painted fern



Equisetum hyemale Rough horsetail



Iris sibirica Siberian Iris



Polystichum munitum Western Sword Fern



Reissued for Rezoning

J Rain Garden Review

Reissued for Rezoning (Draft) 2025-04-02

50 Government St Concept Design 50 Government Street, Victoria, BC

PLANT LIST + IMAGES

2340

